



**US Army Corps
of Engineers®**
New England District

New Bedford Harbor Superfund Site Status Update on Ambient Air Monitoring

Presented by Betsy Ruffle
Senior Risk Assessor, AECOM


April 23, 2015
Public Meeting
New Bedford, MA

Overview of Presentation

- Purpose of air monitoring at New Bedford Harbor
- Summary of past air monitoring
 - Approach
 - Results and findings
- Why the air monitoring plan is being updated
- Overview and objectives of updated program
 - Expanded monitoring network
 - Risk-based goals
 - Reporting and trigger system


Purpose of Air Monitoring Program

- **Monitor** ambient levels of PCBs in air during harbor remediation, as well as periods of inactivity
- **Minimize** impact of remediation activities on the community
- **Track** exposure for comparison to health-protective levels

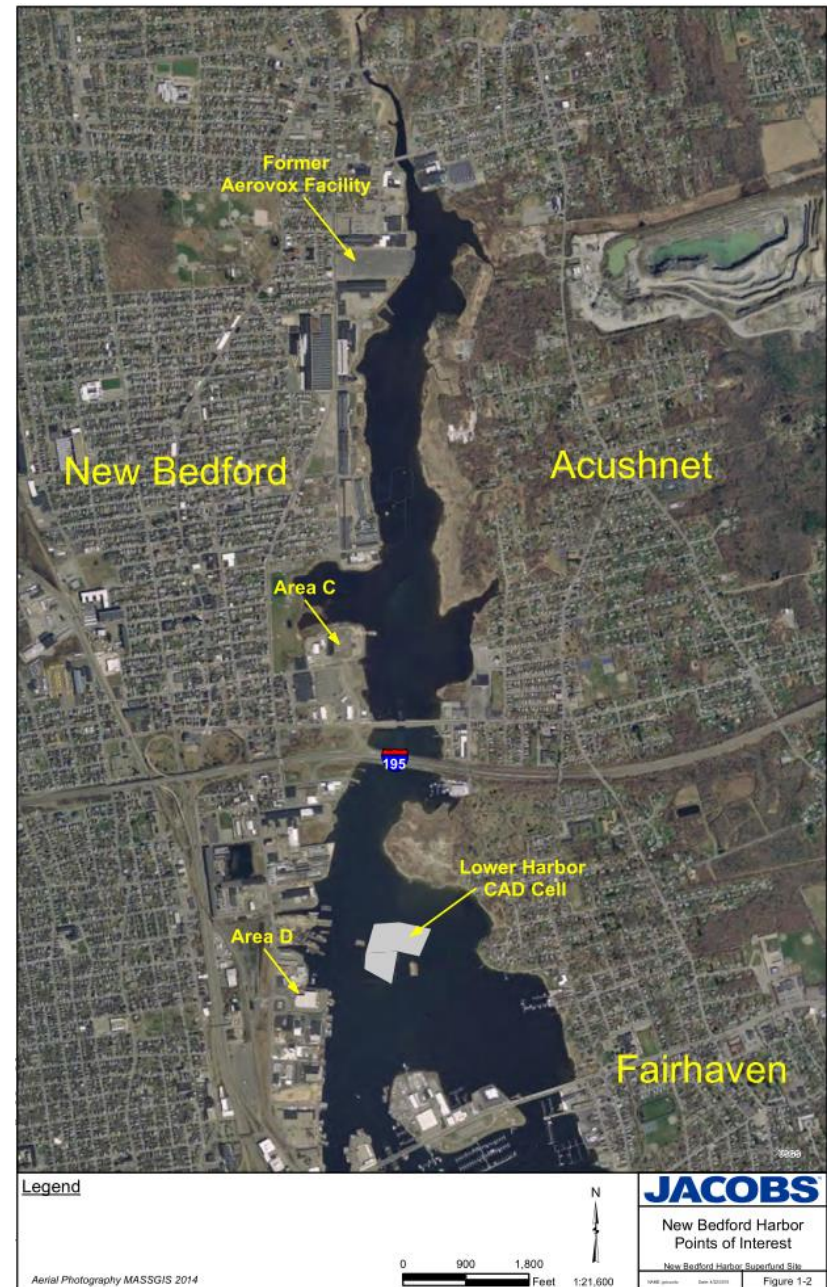


Historical Air Monitoring Network

- Monitoring stations are strategically located around harbor
- 15 stations in network
 - 10 residential (includes mixed use areas)
 - 5 commercial (including 1 dredge)
- Sample monthly during dredging, as well as pre-dredge and post-dredge
- Compiled extensive air monitoring data set

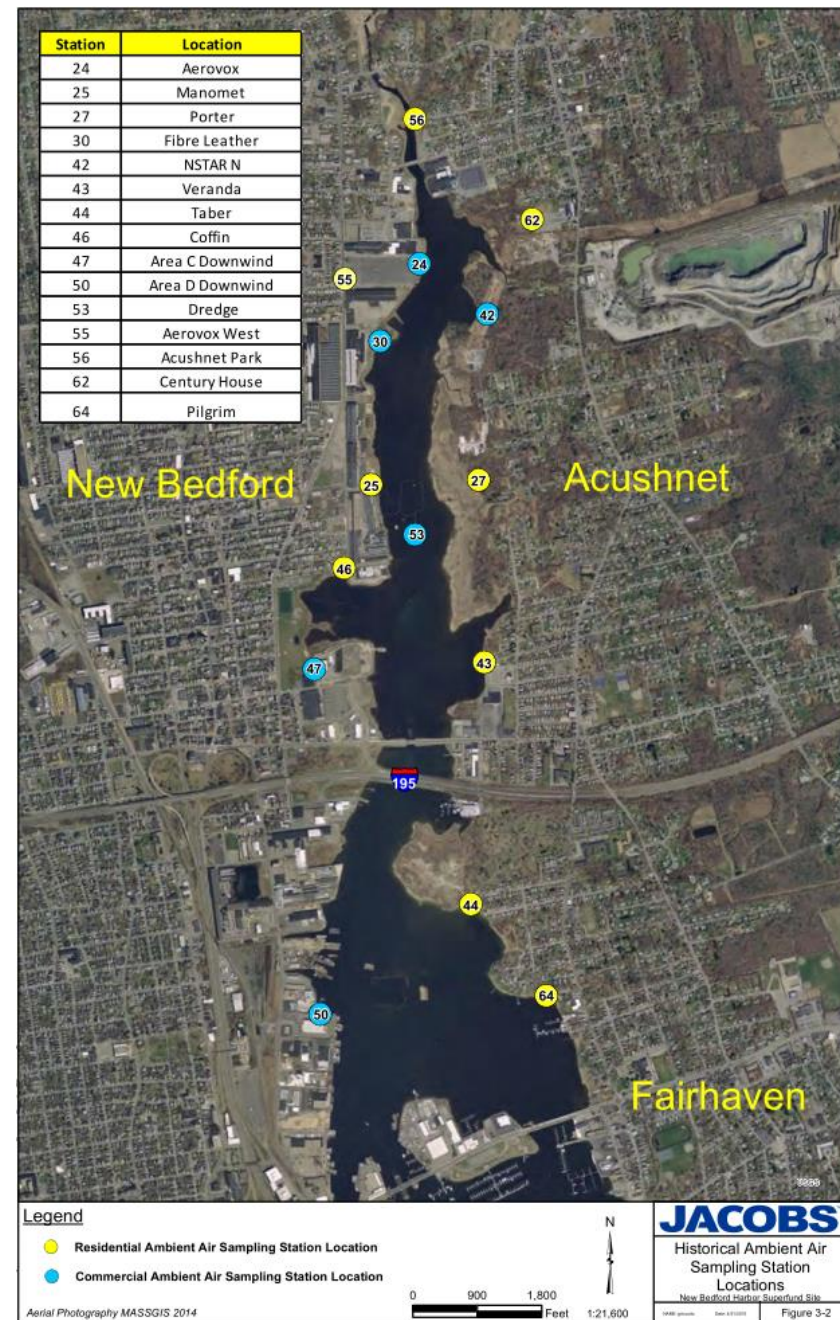

Risk-Based Goals for Air

- Track cumulative exposure at each monitoring station to safeguard community health
- Use *risk-based goals* protective of health effects, including cancer, from long-term exposure to PCBs:
 - Residential = 202 ng/m³
 - Commercial = 344 ng/m³
- Derived assuming exposure is:
 - 24 hours per day
 - 350 days per year (residential)
 - 250 days per year (commercial)
 - 26 years
- Target risk level of 1 chance in 100,000


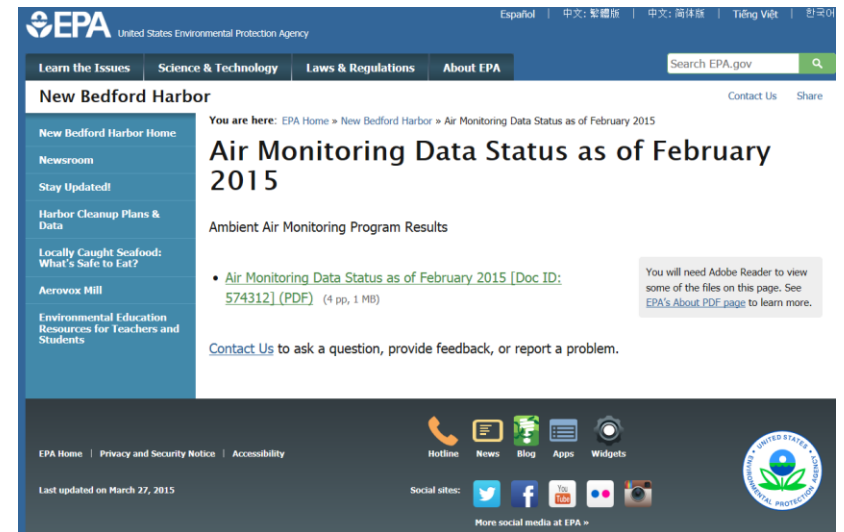


<http://www2.epa.gov/new-bedford-harbor/air-monitoring-data-status-february-2015>





Cumulative Exposure Budgets

- What is the cumulative exposure budget?
 - *Total dose of PCBs over the exposure period that does not exceed the acceptable risk level*
- Cumulative exposures to date are well below the budgets established for the project
- Based on the long-term air data, potential risks posed by PCBs are well below the target risk level established by EPA

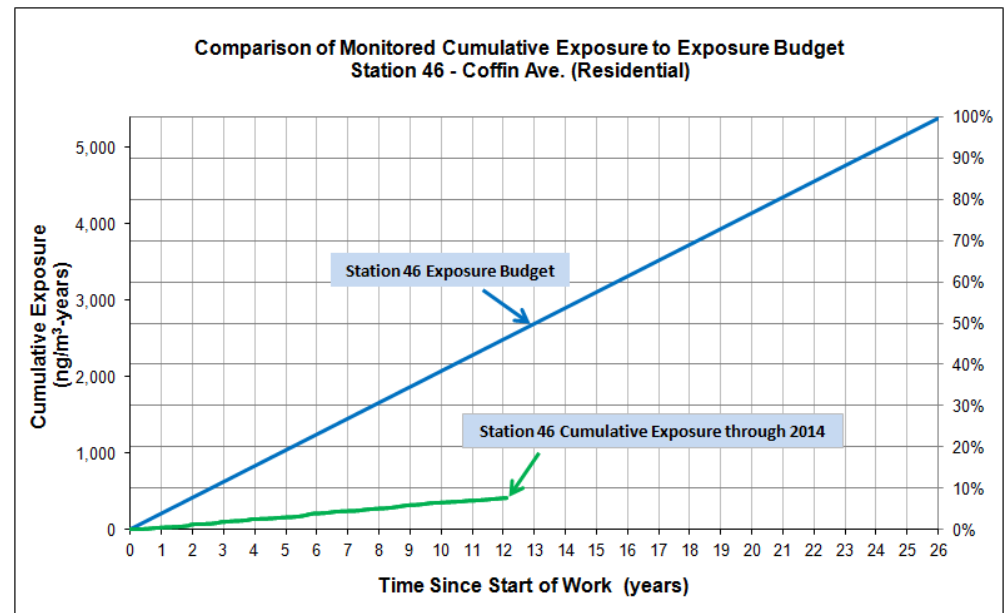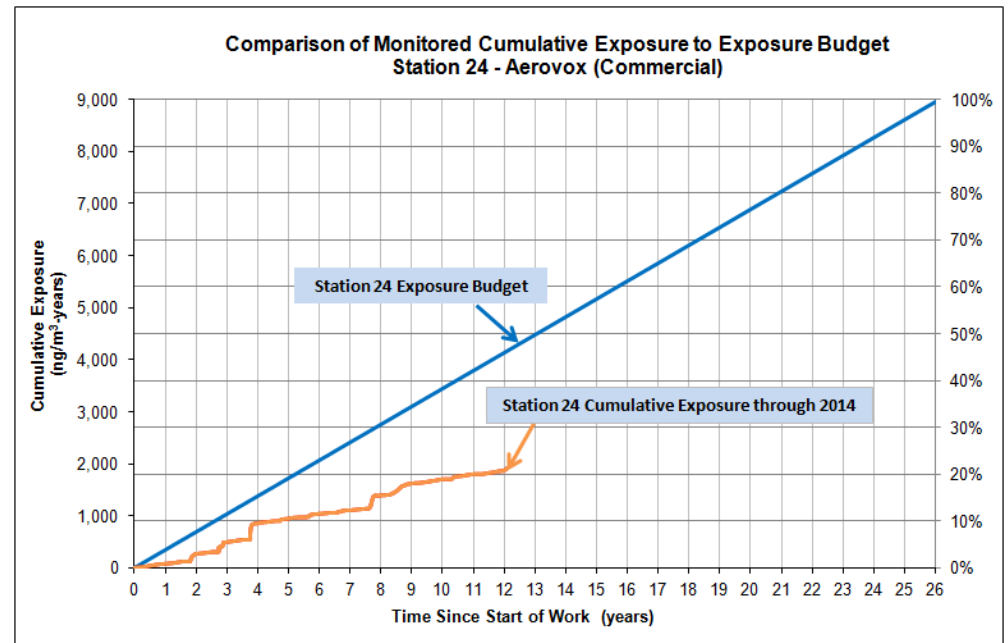

Baseline Conditions are Improving

- Baseline conditions represent ambient concentrations *in the absence of active remediation*
 - Seasonal variation
 - Range from 2 to 75 ng/m³ (annual average)
- Major source is unremediated sediments
- Baseline concentrations have declined over the past decade since full-scale dredging began
- Cumulative exposure budgets include contribution from baseline

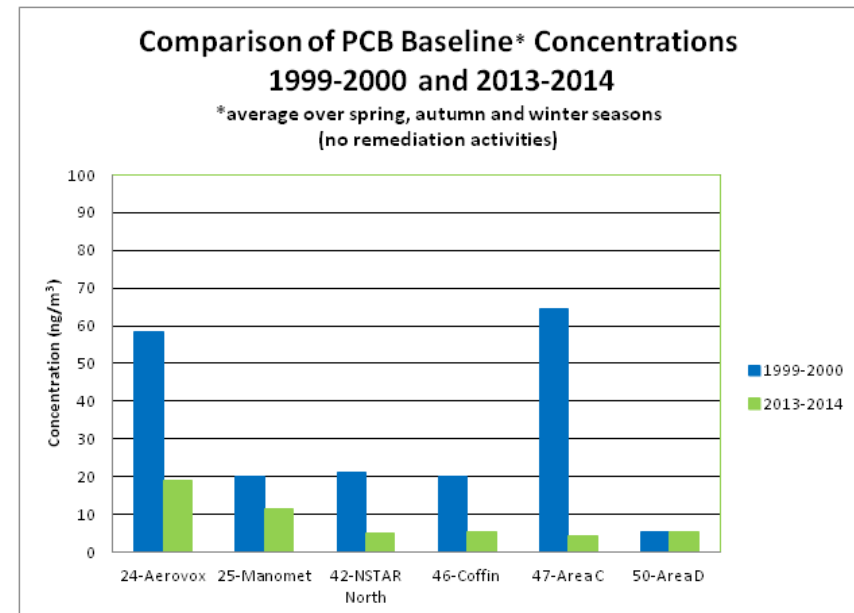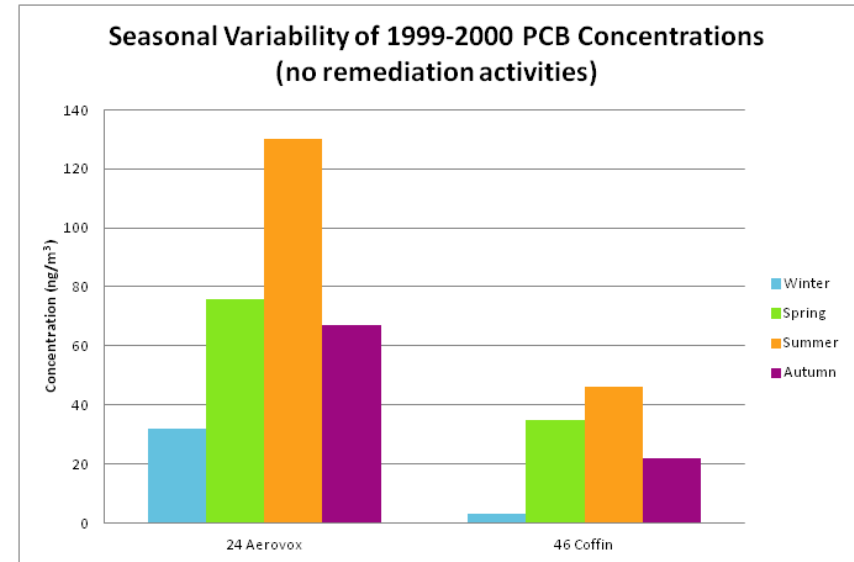

Why is Air Plan Being Updated?

- Expedited remediation schedule from prior plan
- Longer dredge season
- Multiple simultaneous operations in the upper and lower harbors




Air Monitoring for Next Phase of Remediation

- Preview of *2015 Air Plan Update (Jacobs)*
 - Provide additional coverage in Lower Harbor and other areas where remediation has not yet taken place
 - Update risk-based goals for non-cancer effects
 - Clarify procedures for reporting and determining need for re-sampling and/or modification of operations
 - Specify best management practices (BMPs)

Expanded Air Monitoring Network

- Future remediation activities include:
 - Upper Harbor - Hydraulic and mechanical dredging
 - Lower Harbor – mechanical dredging and CAD filling
 - Land-based intertidal remediation and restoration
- Expanded network includes 5 new stations in the Lower Harbor and Station 65 on the Lower Harbor dredge

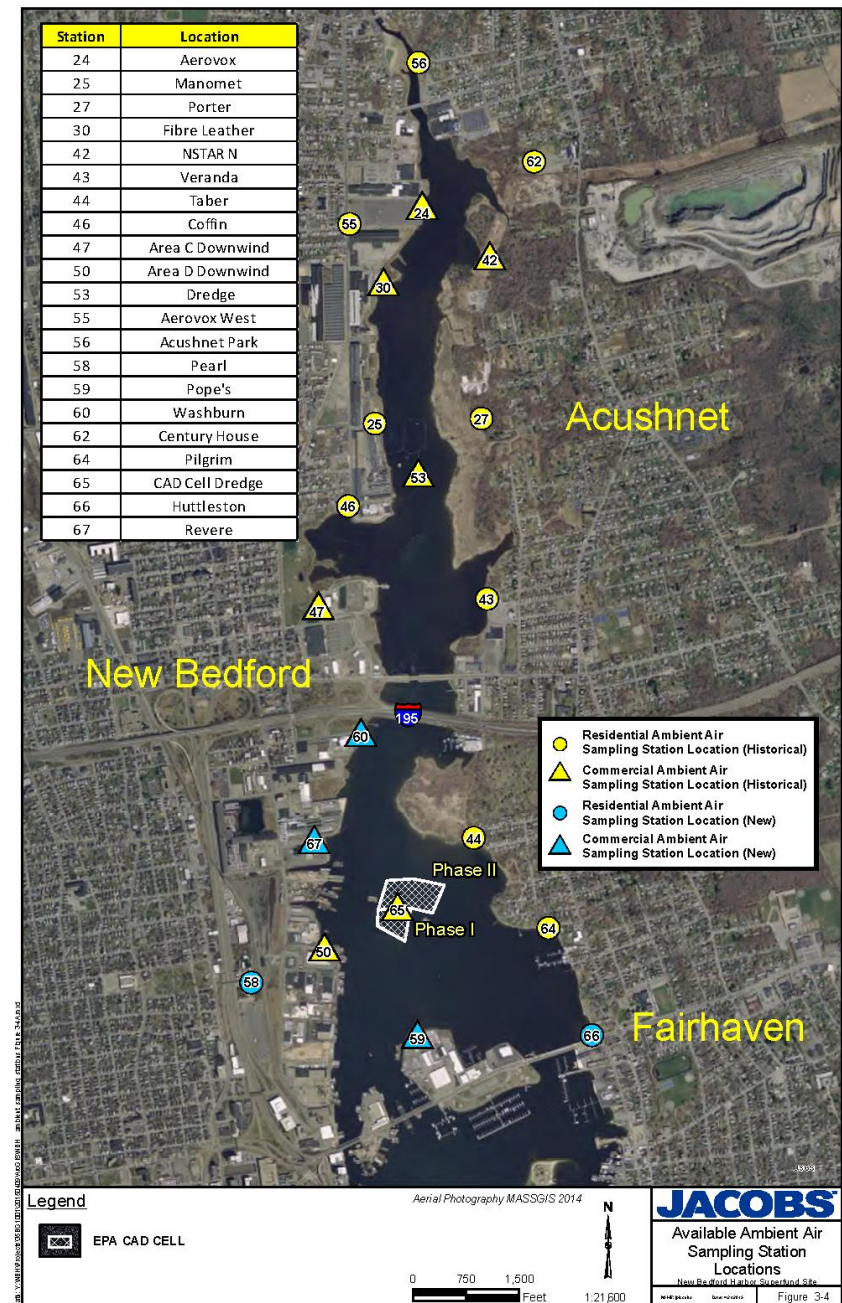

Summary of Risk-Based Goals

Receptor	Cancer * (ng/m ³)	Non-cancer (ng/m ³)
Child Resident	202	110
Adult Resident		256
Commercial Worker	344	1022

- Cumulative exposure budgets will be calculated to match time periods used to derive the risk-based goals:
 - ❖ *Cancer* = 26 years (all receptors) (*under review)
 - ❖ *Non-cancer* = 6 years (child resident), 20 years (adult resident), and 6-25 years (worker)

Reporting and Trigger System

- Post monthly air data on EPA's website
- Compare monthly results to applicable risk-based goals and update cumulative exposure budgets
- Evaluate results against set of trigger levels to determine need for action, including:
 - Review of operational and meteorological conditions during sampling
 - Operational changes or actions to reduce emissions
 - Expedited re-sampling

Summary

- Air monitoring program provides spatial and temporal coverage necessary to ensure protection of public health
- Remediation has not resulted in airborne PCB concentrations above risk-based goals
- Baseline (background) concentrations of PCBs have declined over the past decade
- 2015 Plan Update provides additional measures to ensure safe operations during the next phase of accelerated remediation activities

Questions?