

ADDENDUM TO THE SECOND FIVE-YEAR REVIEW REPORT

**For the
Ralston Site
Cedar Rapids, Linn County, Iowa**

December 2013



Prepared by

**U.S. Environmental Protection Agency
Region 7
Lenexa, Kansas**

30285097



Superfund

Introduction

A Five-Year Review addendum is generally completed for remedies where the protectiveness determination is deferred until further information is obtained. When deferring protectiveness in the Five-Year Review report, the U.S. Environmental Protection Agency typically provides a timeframe for when the information will be obtained and a protectiveness statement can be made. This document describes progress since the June 30, 2011, Second Five-Year Review Report and provides a protectiveness determination for the remedy for the Ralston Site (Site).

The Second Five-Year Review Report for the Site, in Cedar Rapids, Iowa, was signed by Cecilia Tapia, Superfund Division Director on June 30, 2011. The protectiveness statement from the Report was as follows:

- A protectiveness determination for the remedy at the Ralston site cannot be made until further information is obtained. Further information will be obtained by conducting a vapor intrusion study and collecting and evaluating sediment and surface water data from Dry Run Creek. It is expected that this evaluation will take approximately two years to complete, at which time a protectiveness determination may be made.

This Five-Year Review addendum addresses the protectiveness statement for the entire site.

Progress Since the Second Five-Year Review Completion Date

The issues and recommendations from the June 2011 Five-Year Review Report:

Issue	Recommendations and Follow-up Actions	Party Responsible	Milestone Date	Affects Protectiveness (Y/N)	
				Current	Future
1. It is not clearly demonstrated that the extent of contamination has been defined to the east of MW-3B or MW-9B in the Devonian aquifer.	Take actions, possibly including installation of monitoring wells, to define the extent of groundwater contamination to the east in the Devonian aquifer.	Rockwell Collins/IDNR	6/30/2013	N	Y
2. The vapor intrusion exposure pathway has not been evaluated at the Ralston site.	Evaluate potential for vapor intrusion utilizing multiple lines of evidence.	Rockwell Collins/IDNR	6/30/2013	*	*
3. The sediments and surface water of Dry Run Creek have not been sampled since prior to the ROD.	Sample sediments and surface water of Dry Run Creek and amend O&M Plan to include periodic sampling.	Rockwell Collins/IDNR	6/30/2012	*	*

Issue	Recommendations and Follow-up Actions	Party Responsible	Milestone Date	Affects Protectiveness (Y/N)	
4. Listing on the state Registry of Hazardous Waste or Hazardous Substance Disposal Sites is not as enforceable as an environmental covenant.	Implement Uniform Environmental Covenant on the site property.	Rockwell Collins/ IDNR/EPA	6/30/2012	N	Y

*Protectiveness determination deferred.

Actions Taken to Resolve Issues

Issue 1

Two monitoring wells, MW-10B and MW-11B, were installed at the Site between May 14 and 21, 2013. The purpose of the installation of MW-10B and MW-11B was to create groundwater monitoring and sampling points to delineate the extent of groundwater impacts in the Devonian aquifer east of MW-3B and southeast of MW-9, respectively. Monitoring well MW-10B was also located to delineate groundwater impacts in the Devonian aquifer between the Site and the Thurness residence, which would provide information necessary for a vapor intrusion evaluation. (Issue 2) The location of these monitoring wells is shown in Figure 1, attached.

These new monitoring wells, as well as others associated with the Site, were gauged to determine the direction of groundwater flow. It was determined that groundwater flow in the Devonian aquifer was to the east and southeast, as depicted in Figure 2. MW-10B and MW-11B, as well as the other monitoring wells that comprise the monitoring network for the Site, were sampled for volatile organic compounds (VOCs). As summarized in Table 1, VOCs were not detected in MW-10B or MW-11B above a detection limit. The extent of groundwater contamination has been defined to the east of MW-3B or MW-9B in the Devonian aquifer.

Issue 2

In a letter report (attached) dated, February 14, 2012, submitted to the EPA by MWH, on behalf of Rockwell Collins, Inc., the vapor intrusion pathway was evaluated using a multiple-lines-of-evidence approach. However, at that time, the extent of groundwater contamination to the east and southeast in Devonian aquifer was not fully defined. Now that the extent of that groundwater contamination is known, and it has been demonstrated that it does not extend toward buildings in those areas, the conclusions reached in the February 2012 report are acceptable. It can be concluded that outside of the property owned by Rockwell Collins, where future development will not be permitted by the owner, vapor intrusion is unlikely to occur and result in indoor air exceeding a target cancer risk of 1×10^{-6} or a noncancer health index greater than one.

Issue 3

Sediment and surface water samples were collected from Dry Run Creek on June 13, 2013. Sampling and analysis of sediment and surface water samples provides information pertaining to the effectiveness of the capping of the disposal area and the stabilization of the bank of Dry Run Creek. Six surface water samples were collected and analyzed for VOCs and metals. VOCs were not detected in any of the surface water samples. Figure 3 shows the surface water sampling locations and the concentration of metals that were detected in the samples. The levels of metals detected in surface water samples were below both chronic and acute ambient water quality criteria for biota and therefore, would not be expected to pose an unacceptable ecological risk.

Sediment samples were collected from four locations in Dry Run Creek and analyzed for VOCs and metals. VOCs were not detected in any of the sediment samples. Figure 4 shows the sediment sampling locations and the metals concentrations that were detected in the samples. The concentrations of the metals that were detected in sediment were compared to MacDonald sediment screening probable effect concentration values and did not exceed these values. Therefore, these metals would not be expected to pose an unacceptable ecological risk.

Issue 4

The property owner, Rockwell Collins, has indicated that they will not implement an environmental covenant at this time. Rockwell's on-going ownership of the Site allows them to control access and limit construction that might result in exposure. They have stated that nothing will be built on the Site. The Site continues to be listed on the state Registry of Hazardous Waste or Hazardous Substance Disposal Sites. The Iowa Chapter 53 Protected Groundwater Use designation within one mile of the Site continues to be in place.

Issues and Recommendations

No new issues or recommendations have been identified since completion of the Second Five-Year Review. Issues 1, 2 and 3 have been fully resolved. The EPA continues to support Recommendation 4- Implementation of a Uniform Environmental Covenant on the site property. A Uniform Environmental Covenant would provide a more permanent and enforceable means of imposing limitations on future use of the property than the current listing on the state registry. Implementing a Uniform Environmental Covenant would ensure long-term protectiveness.


Protectiveness Statement

Based on new information since the Second Five-Year Review completion date, the sitewide protectiveness statement for the Ralston site is being revised as follows:

The remedy at the Ralston site is protective of human health and the environment in the short-term. In order to be protective in the long-term, the EPA will continue to pursue implementation of a Uniform Environmental Covenant on the Rockwell property.

Next Five-Year Review

The next five-year review will be completed by June 30, 2016, five years after the signature of the last five-year review report.

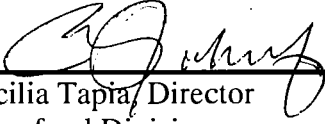

Cecilia Tapia, Director
Superfund Division

Date: 12-13-13



MWH

BUILDING A BETTER WORLD

February 14, 2012

Ms. Diana Engeman, Remedial Project Manager
Iowa/Nebraska Remedial Branch
Superfund Division
U.S. Environmental Protection Agency
901 North 5th Street
Kansas City, KS 66101

RE: Second Five-Year Review
Former Ralston Disposal Site
Cedar Rapids, Iowa
EPA ID No. IAD980632491

Dear Ms. Engeman:

MWH, on behalf of our client, Rockwell Collins, Inc. (Rockwell Collins), has prepared this letter to provide a response to the action items outlined in the Second Five-Year Review of the former Ralston Disposal (Ralston) Site, in Cedar Rapids, Iowa (Site), dated June 2011 (5-Year Review), prepared by the United States Environmental Protection Agency (USEPA). In the 5-Year review, the USEPA identified two issues requiring follow-up actions that prohibited USEPA from making a protectiveness determination for the remedy at the Site. Two additional issues were also identified in the 5-Year Review that did not affect the protectiveness determination of the Site remedy; however, the USEPA recommended additional actions be taken. MWH has noted the Iowa Department of Natural Resources (IDNR) does not uniformly share the concerns regarding the issues USEPA raised. Responses to the issues identified are provided in the order, as presented in Table 3 of the 5-Year Review:

- 1) *It is not clearly demonstrated that the extent of contamination has been defined to the east of MW-3B or MW-9B in the Devonian aquifer.*

The 5-Year Review states this issue does not affect the current protectiveness of the remedy in place. Sections 6.4 and 7.4 of the 5-Year Review have focused on a concern with a change in the apparent groundwater flow direction in the B-series wells monitoring the Devonian bedrock aquifer. It was noted the apparent groundwater flow direction in the Devonian bedrock aquifer has been depicted to be in a more eastern or northeastern direction in the past five years, in comparison to a more southeastern direction as depicted previously. The basis of the comment is groundwater flow directions depicted on groundwater flow direction maps submitted in the Remedial Investigation (RI) Report, and in Annual Remedial Action Activity Reports submitted

RECEIVED

FEB 16 2012

SUPERFUND DIVISION

MWH #1010763.0101

for years 2006 through 2010. The interpreted groundwater flow directions are depicted based on the piezometric surface depicted in these figures, and not based on actual groundwater flow direction calculations.

To evaluate the variation, the groundwater flow direction in the B-series wells monitoring the Devonian bedrock aquifer during the RI and subsequent groundwater gauging events, was compiled. A summary of the gauging data from the B-series monitoring wells is presented in Table 1. Table 1 also includes monitoring well gauging and groundwater elevation data collected in 2011, as part of the planned annual site monitoring activities. The locations of the B-series monitoring wells and other features in the vicinity of the Site are presented in Figure 1. Historical groundwater flow directions were evaluated in monitoring wells MW-1B, MW-3B, and MW-9B; and monitoring wells MW-2B, MW-4B, and MW-9B using gauging data collected since September 1994, following the installation of MW-9B. These two data sets were selected as groundwater between them passes through the Site, as depicted in Figure 1.

Rather than using a typical three point solution (i.e., Heath, 1982) to calculate groundwater flow direction (or azimuth) and hydraulic gradient, a method utilizing vector geometry (Wineland, T. R., K. A. Armstrong, and R. J. Kroneman, 2008) was utilized. For each well set, vector attitudes from one monitoring well to each of two monitoring wells were determined based on the relative location of the wells to each other ("x" and "y" for location) and the respective groundwater elevations ("z"). Cross-product vectors, basically the pole of the piezometric surface of the three wells evaluated, were calculated and converted to a groundwater flow azimuth. This method allows for easy calculation of groundwater flow azimuth in an excel spreadsheet, as presented in Attachment A.

The groundwater flow azimuth calculations were graphed to show the changes in groundwater flow direction and hydraulic gradient as a function of time. Graphs depicting the calculated groundwater flow azimuth for monitoring wells MW-1B, MW-3B and MW-9B, and MW-2B, MW-4B, and MW-9B, respectively are included in Attachment A. As depicted in Graph A-1, the groundwater flow azimuth was calculated to approximately 82 degrees, ± 1 degree, or easterly direction over the past five years. This azimuth range mirrors the azimuth range calculated for these monitoring wells using data collected from 1994 through 1996, which was included in the RI. Variation in groundwater flow azimuth of 75 degrees (October 2001 and October 2004) to 95 degrees (October 2002, April 2004, and October 2005) was noted in several of the gauging events completed between 2001 and 2005. The cause of the variability during this period is not clearly evident, but generally coincides with a period when groundwater elevations were generally lower than the past five years.

As depicted in Graph A-2, the groundwater flow azimuth for monitoring well gauging data collected from MW-2B, MW-4B, and MW-9B varied from 119 degrees (southeast) to

262 degrees (west) during the gauging record. Beginning in 2005, the groundwater flow azimuth calculated for these three monitoring wells has been consistently to the south and southeast, but within the azimuth range calculated with the data collected during the RI.

Based on these calculations, a significant shift in groundwater azimuth is not evident at the Site based on the groundwater gauging data, and installation of additional groundwater monitoring points to assess the Devonian bedrock aquifer is not proposed. The extent of groundwater impacts of trichloroethene (TCE) and cis-1,2-dichloroethene (cis-1,2-DCE) east of MW-3B has been delineated in the Devonian bedrock aquifer during the advancement of monitoring well MW-7D, where analysis of groundwater collected through packer sampling was completed at a depth of approximately 63 to 68 feet below ground surface (bgs), as presented in Table 5-3 of the RI.

Groundwater impacts in the Devonian bedrock aquifer southeast of MW-9B have been monitored on a semiannual basis since 2001 through the sampling of the Finley residence well. As summarized in Table 4-7 of the RI, the Finley residence well is open to the Devonian aquifer beginning at an elevation of 815 feet above sea level (ASL), to the base of the Devonian aquifer at approximately 700 feet ASL. The Finley well is open to the interval screened by MW-9B, ranging from approximately 740 to 750 feet ASL. As documented in the RI and subsequent annual reports, detectable concentrations of TCE, cis-1,2-DCE, and other related volatile organic compounds (VOCs) have not been detected in samples collected from the Finley well.

MWH, therefore, concludes further delineation of the groundwater plume in the Devonian bedrock aquifer is not warranted.

2) *The vapor intrusion exposure pathway has not been evaluated at the Ralston site.*

The 5-year Review states this issue needs to be addressed to determine the current protectiveness of the remedy in place. The vapor intrusion pathway was not considered in the original RI or baseline risk assessment. The current concern is VOC-impacted groundwater may underlie or be adjacent to off-site buildings located south of the Site. In the 5-Year Review, the USEPA requested an evaluation of the pathway be completed using a multiple lines of evidence approach.

A desktop evaluation of the vapor intrusion pathway has been completed to assess whether additional action is warranted at the Site. The evaluation used a stepped approach where increasing site-specific data is utilized to evaluate the Site. The evaluation is presented in Attachment B of this letter.

The desktop evaluation concluded that VOC concentrations in the vicinity of MW-1A and MW-3A could potentially result in indoor air concentrations exceeding a target risk of 1E-06, or a hazard index of 1. The highest detected groundwater concentrations and, therefore, calculated maximum soil vapor concentrations are located at MW-3A. The closest residential buildings to MW-3A are the Thurness residence, which is located approximately 570 feet to the northeast, and the Raftis residence located approximately 560 feet to the southwest. Monitoring well MW-1A is also located over 100 feet away from the nearest buildings. However, future residential development in the vicinity of these wells will not occur given Rockwell Collins' ownership of the property in the area, existing institutional controls, the steep topography near the Site, and land development patterns.

The desktop evaluation also concluded VOC concentrations in the vicinity of MW-7D and MW-9B also have the potential to generate indoor air concentrations exceeding a target risk of 1E-06 or a hazard index of 1. Groundwater at MW-9B is over 70 feet below the ground surface, with the glacial till sediments above bedrock at this location approximately 70 feet thick. Shallow groundwater is present in these areas in the surficial sediments, as documented in the RI, and the extent of VOC impacts in the alluvial aquifer have been delineated between the former disposal area and bedrock monitoring well MW-9B. Given the results of groundwater monitoring completed since submittal of the RI, the installation of monitoring wells away from the delineated extent of the VOC impacts in the alluvial aquifer, including the MW-9B location, is not warranted. Given the shallow saturated conditions above bedrock and relatively fine-grained sediments, the alluvial aquifer is expected to be an effective barrier for any vapors potentially generated from impacted groundwater in the bedrock aquifers from impacting any hypothetical future structures that may be installed near MW-9B.

MWH, therefore, concludes further evaluation of the vapor intrusion pathway is not required.

3) *The sediments and surface water of Dry Run Creek have not been sampled since prior to the ROD.*

The 5-Year Review states this issue needs to be addressed to determine the current protectiveness of the remedy in place. USEPA's comments regarding sediment and surface water focus on substantiating that site contaminants of concern (COCs) have not adversely impacted sediment or surface water in Dry Run Creek in the time since collection of the sediment and surface water in 1992 and completion of the Record of Decision (ROD) in 1999, along with completion of the response actions. Four sediment sample locations and five surface water sample locations in Dry Run Creek were sampled in 1992, more than 30 years after disposal activities ceased at the Site and prior to implementation of the remedial activities. Six additional surface water samples were collected in 1994. Analytical results for the sediment and surface water samples in 1992 and 1994 served to characterize potential impact of site COCs

on sediment and surface water in Dry Run Creek. Figure 2 depicts the 1992 sediment locations and 1992 and 1994 surface water sample locations relative to the Remedial Cap Area.

Sediment and surface water data from 1992 were documented in the March 1993 Removal Site Evaluation (1993 RSE), which included an evaluation of the data in relation to USEPA Ambient Water Quality Criteria published in 1980 and 1984. The results of that comparison, as summarized in the 1993 RSE, indicated the 1992 sediment and surface water sample analyte concentrations did not exceed Ambient Water Quality Criteria. Further detail is available in the 1993 RSE. The 1992 sediment and surface data were further evaluated along with soil and groundwater data in the 1994 Final Baseline Risk Assessment (BRA), which addressed human health risk. The findings of the 1994 BRA were summarized in the 1999 ROD indicating the only contaminated media which poses an unacceptable level of threat is groundwater. Six additional surface water samples were collected in 1994 from locations similar to 1992, but with two of the samples located further downstream than the 1992 sample locations, as shown in Figure 2.

To evaluate the 1992 sediment, and 1992 and 1994 surface water data, in relation to more current ecological screening values, the data are presented in Tables 2 and 3 in comparison to the USEPA Region 5 Ecological Screening Levels (ESL) adopted in 2003. The sediment data in Table 2 are also compared to Consensus-Based Probable Effect Concentrations (PECs) (MacDonald, D.D., C.G. Ingersol and T.A. Berger, 2000). The Consensus-Based PECs have historically been used at USEPA direction for evaluation of sediment data at other environmental investigation sites in Iowa.

Among the four sediment samples collected in 1992, three VOCs and ten polynuclear aromatic hydrocarbons (PAHs), were reported above the analytical method detection limits (MDLs). The detected VOCs were acetone, cis-1,2-DCE and TCE. Acetone was detected in one sediment sample at an estimated concentration of 23 micrograms per kilogram ($\mu\text{g}/\text{kg}$), and was also found in the analytical method sample blank. The USEPA Region 5 ESL for sediment for acetone is 9.9 $\mu\text{g}/\text{kg}$. Acetone was reported to be below the MDL in the other three sediment samples. Acetone is a common laboratory artifact, and is not a COC for groundwater at the Site. TCE was detected in one sediment sample at an estimated concentration of 2 $\mu\text{g}/\text{kg}$ and was below the MDL in the other three sediment samples. The USEPA Region 5 ESL for TCE is 112 $\mu\text{g}/\text{kg}$. The detected concentrations of cis-1,2-DCE in two sediment samples were 4 $\mu\text{g}/\text{kg}$ and 14 $\mu\text{g}/\text{kg}$. There is no established USEPA Region 5 ESL for cis-1,2-DCE. There are no established Consensus-Based PECs for acetone, cis-1,2-DCE, and TCE for comparison.

Eight of the ten PAHs reported in the sediment samples above the MDL were less than the corresponding USEPA Region 5 ESLs for sediment and the Consensus-Based PECs. Two of the PAHs, pyrene, and benzo(a)anthracene, were reported in one sediment sample at

concentrations of 320 µg/kg and 140 µg/kg, respectively. The concentrations of these two PAHs were greater than the applicable USEPA Region 5 ESLs for sediment, but less than the applicable Consensus-Based PECs for pyrene and benzo(a)anthracene. PAHs are not a significant COC for the site, but are common constituents in urban runoff.

Resource Conservation and Recovery Act (RCRA) metals, cyanide, and zinc concentrations in each of the sediment samples were less than the MDL and/or the USEPA Region 5 ESLs for sediment except for cadmium. Cadmium concentrations in all four sediment samples were greater than the USEPA Region 5 ESL for sediment of 990 µg/kg, but less than the Consensus-Based PEC of 4,980 µg/kg.

Surface water samples collected in 1992 were taken during ponded conditions and during flowing conditions within Dry Run Creek. Semivolatile organic compounds (SVOCs) and cyanide were not detected above the MDL in any of the surface water samples. Ten VOCs, barium, cadmium, copper, lead, nickel, and zinc were detected in the surface water samples. All of the detected VOCs were reported at concentrations less than the USEPA Region 5 ESLs for water.

With the exception of cadmium, lead, and copper, the metal constituents detected in the surface water samples were at concentrations less than the USEPA Region 5 ESLs for water. Cadmium was detected in concentrations ranging from less than the method detection limit to 8 µg/L. The USEPA Region 5 ESL for water for cadmium is 0.15 µg/L. Lead concentrations ranged from 2.5 to 6.1 µg/L in the 1992 surface water samples collected during ponded conditions and ranged from 7 to 12.8 µg/L in the surface water samples collected during flowing conditions. The USEPA Region 5 ESL for water for lead is 1.17 µg/L. Surface water samples collected at locations upstream and downstream from the Remedial Cap Area had lead concentrations above the USEPA Region 5 ESLs for water. Lead was also reported as having been detected in the analytical method blank, possibly affecting the reported concentrations in the surface water samples. Copper concentrations ranged from below the MDL of 3 µg/L at the upstream surface water location (PZ-1) to 16.1 µg/L at the location PZ-2 adjacent to the northern reach of the Remedial Cap Area. The USEPA Region 5 ESLs for water for copper is 1.58 µg/L. However, following completion of the RI, metals were determined to no longer be a concern at the Site, and further monitoring unwarranted, based on results of groundwater sampling of A-series wells completed in the Spring of 2001.

The six surface water samples collected in 1994 were analyzed for selected VOCs, cis-1,2-DCE, and TCE. The 1994 surface water data did not exceed the USEPA Region 5 ESL for water for TCE. There is no USEPA Region 5 ESL for water established for cis-1,2-DCE. The concentrations of TCE and cis-1,2-DCE in surface water decreased downstream of the Remedial Cap Area. Evaluation of site COC data from ongoing groundwater monitoring at the

Site (A-series wells, specifically MW-2A, MW-3A and MW-4A) generally shows a stable or gradual reduction of VOCs at the Site.

Corrective measures agreed to in the ROD as protective of surface water and sediment in Dry Run Creek have been implemented. These include the Remedial Cap consisting of the disposal area cap and creek bank stabilization, continuing inspection and maintenance of the cap and bank barriers, and groundwater monitoring. The capping and bank stabilization measures reduced or eliminated the potential for Site COCs to impact sediment and surface water in Dry Run Creek. The inspection and maintenance components of the continuing activities at the Site serve a protective role where Dry Run Creek is concerned, allowing for repairs to the protective systems, as needed, to ensure functionality.

Considering the evaluation of sediment and surface water analytical data already presented in past site reports including as summarized in the 1999 ROD, Rockwell Collins proposes to continue implementation of the Operation and Maintenance (O&M) Plan as currently established. Sediment and surface water sampling of Dry Run Creek was done prior to the Removal Action (RA), and, therefore, was a representation of potential site impacts to the Dry Run Creek under an exposure scenario prior to implementation of the removal actions. The RA as addressed in the ROD, significantly reduced or eliminated any potential threat to aquatic life in Dry Run Creek.

The EPA comments that PCBs and dichloro-diphenyl-trichloroethane (DDT) were not analyzed in sediment samples collected in 1992. Review of the soil sampling data shows that three soil samples SB-1, SB-2, and SB-3 collected in 1992 from the disposal area were analyzed for PCBs and organochlorine pesticides. One Arochlor (Arochlor-1260) was detected once, in the soil sample SB-2 at a concentration of 4.2 milligrams per kilogram (mg/kg). The analyte 4,4-DDT was detected once in soil sample SB-1 at a concentration of 0.4 mg/kg. As depicted in Figure 2, sampling locations SB-1, SB-2, and SB-3 are located beneath the current Remedial Area Cap. The soil samples analyzed for PCBs and pesticides in 1992 were collected as composite samples from the depth interval 0 to 5 feet bgs in the disposal area. The data indicate the presence of Arochlor-1260 and 4,4-DDT was not widespread across the disposal area of the Site and, therefore, were not included in the sediment and surface water sampling events in 1992 and 1994.

Based on the previously conducted evaluation and subsequent activities, no further activities are proposed to address this comment.

4) *Listing on the state Registry of Hazardous Waste or Hazardous Substance Disposal Sites is not enforceable as an environmental covenant.*


The 5-Year Review states this issue does not affect the current protectiveness of the remedy in place. Sections 7.1, 7.3, and 7.4 of the 5-Year Review state a uniform environmental covenant

for the property owned by Rockwell Collins that comprises the Site would be a more enforceable institutional control than the current listing on the state's Registry of Hazardous Waste or Hazardous Substance Disposal Sites (Registry). As further noted in the 5-Year Review, amendments to the Iowa Administrative Code (IAC) covering the Registry state the contaminated portion of a site may be removed from the Registry in the event a uniform environmental covenant is executed for the Site. The July 1, 2011 amendments to the IAC also prohibit new sites from being added to the Registry. The USEPA may have been given the impression during the April 14, 2011 site inspection visit that the Registry was not being maintained. However, the Registry has not been weakened following the July 1, 2011 amendments, and is being maintained for sites that are currently listed.

There are no immediate plans to implement an environmental covenant on the former disposal area property, and the current status of the Registry does not warrant a change in this stance. Rockwell Collins is a viable company that continues to own the property it controls on and surrounding the Site, and there are no plans to change ownership. Development or other change in land use of this property is not planned, and Rockwell Collins understands the need to notify the director of the IDNR for written approval prior to a change in ownership or substantial property use. Furthermore, the current Chapter 53 Protected Groundwater Use designation within 1 mile of the Site continues to be effective to evaluate potential groundwater development near the Site.

No further action is proposed to address the issues raised during the 5-Year review. Furthermore, the presented vapor intrusion evaluation and review of surface water and sediment due not suggest a further delay in issuing a protectiveness determination of the Site is necessary. If you have questions, please feel free to contact Tom Gentner, of Rockwell Collins at 319-295-5710, or me.

Sincerely,

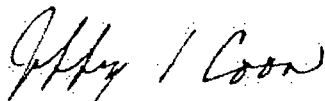

Jeffrey Coon, P.E.
Division Director, E&I West

/srv:vas

Attachments

cc: Tom Gentner, Rockwell Collins
Bob Drustrup, IDNR

REFERENCES

Heath, R.H., 1982. *Basic Ground-Water Hydrology*, United States Geological Survey Water-Supply Paper 2220, p. 81.

Wineland, T. R., K. A. Armstrong and R. J. Kroneman, 2008. *Use of Datalogging Pressure transducers for Enhanced Interpretation of Groundwater Flow, Hydrogeologic Conditions, and Groundwater/Surface Water Interaction – a Case Study of Uses at Former Manufactured Gas Plant Sites*. Presented at the 53rd Annual Midwest Ground Water Conference, Dubuque, Iowa, October 1.

MacDonald, D.D., C. G. Ingersol and T. A. Berger, 2000. *Development and Evaluation of Consensus-Based Sediment Quality Guidelines for Freshwater Ecosystems*, Archives of Environmental Contamination and Toxicology, Vol 39, pp 20-31.

TABLES

TABLE 1

**DEVONIAN AQUIFER GAUGING DATA
FORMER RALSTON DISPOSAL SITE - CEDAR RAPIDS, IOWA**

Date	MW-1B			MW-2B			MW-3B			MW-4B			MW-9B		
	TOC	DTW	GWE	TOC	DTW	GWE	TOC	DTW	GWE	TOC	DTW	GWE	TOC	DTW	GWE
12/17/1992	801.10	10.98	790.12	794.57	6.96	787.61	792.30	6.34	785.96	790.03	2.60	787.43	NI	NI	NI
01/05/1993	801.10	11.46	789.64	794.57	7.60	786.97	792.30	7.00	785.30	790.03	3.36	786.67	NI	NI	NI
06/14/1993	801.10	10.05	791.05	794.57	6.98	787.59	792.30	6.22	786.08	790.03	3.33	786.70	NI	NI	NI
12/17/1993	801.10	14.01	787.09	794.57	9.15	785.42	792.30	7.98	784.32	790.03	4.75	785.28	NI	NI	NI
07/06/1994	801.10	12.93	788.17	794.57	8.59	785.98	792.30	7.74	784.56	790.03	4.59	785.44	NI	NI	NI
09/06/1994	805.34	18.78	786.56	794.18	10.04	784.14	791.94	8.56	783.38	789.79	5.50	784.29	855.49	72.64	782.85
12/12/1994	805.34	19.72	785.62	794.18	10.82	783.36	791.94	9.17	782.77	789.79	5.93	783.86	855.49	73.35	782.14
07/10/1995	805.34	17.05	788.29	794.18	8.37	785.81	791.94	7.16	784.78	789.79	4.71	785.08	855.49	71.31	784.18
09/20/1995	805.34	20.34	785.00	794.18	11.86	782.32	791.94	9.58	782.36	789.79	6.71	783.08	855.49	73.40	782.09
12/12/1995	805.34	20.71	784.63	794.18	12.47	781.71	791.94	10.24	781.70	789.79	6.73	783.06	855.49	74.11	781.38
04/08/1996	805.34	20.17	785.17	794.18	12.02	782.16	791.94	9.72	782.22	789.79	6.30	783.49	855.49	73.64	781.85
07/02/1996	805.34	16.39	788.95	794.18	8.03	786.15	791.94	7.19	784.75	789.79	4.18	785.61	855.49	71.46	784.03
09/12/1996	805.34	20.02	785.32	794.18	12.02	782.16	791.94	9.81	782.13	789.79	6.83	782.96	855.49	73.68	781.81
04/25/2001	805.34	14.56	790.78	794.18	7.69	786.49	791.94	6.96	784.98	789.79	3.26	786.53	855.49	71.41	784.08
10/22/2001	805.34	19.73	785.61	794.18	12.01	782.17	791.94	10.66	781.28	789.79	6.04	783.75	855.49	73.68	781.81
04/30/2002	805.34	17.19	788.15	794.18	9.26	784.92	791.94	7.94	784.00	789.79	4.21	785.58	855.49	72.26	783.23
10/22/2002	805.34	18.87	786.47	794.18	10.74	783.44	791.94	8.77	783.17	789.79	5.40	784.39	855.49	73.85	781.64
04/22/2003	805.34	20.67	784.67	794.18	12.95	781.23	791.94	10.53	781.41	789.79	6.20	783.59	855.49	74.53	780.96
10/28/2003	805.34	20.33	785.01	794.18	12.68	781.50	791.94	10.35	781.59	789.79	6.59	783.20	855.49	74.26	781.23
04/07/2004	805.34	16.87	788.47	794.18	8.87	785.31	791.94	7.81	784.13	789.79	4.57	785.22	855.49	74.30	781.19
10/26/2004	805.34	20.24	785.10	794.18	12.52	781.66	791.94	10.23	781.71	789.79	6.49	783.30	855.49	73.13	782.36
04/24/2005	805.34	20.61	784.73	794.18	12.79	781.39	791.94	11.07	780.87	789.79	7.61	782.18	855.49	75.34	780.15
10/25/2005	805.34	21.30	784.04	794.18	14.43	779.75	791.94	11.41	780.53	789.79	8.00	781.79	855.49	78.80	776.69
04/25/2006	805.34	18.02	787.32	794.18	10.18	784.00	791.94	8.77	783.17	789.79	5.17	784.62	855.49	73.13	782.36
04/24/2007	805.34	15.72	789.62	794.18	8.28	785.90	791.94	7.42	784.52	789.79	4.06	785.73	855.49	71.90	783.59
04/01/2008	805.34	12.86	792.48	794.18	6.35	787.83	791.94	5.98	785.96	789.79	2.48	787.31	855.49	70.61	784.88
04/13/2009	805.34	17.00	788.34	794.18	9.29	784.89	791.94	8.00	783.94	789.79	4.52	785.27	855.49	72.37	783.12
05/04/2010	805.34	15.55	789.79	794.18	8.43	785.75	791.94	7.30	784.64	789.79	3.82	785.97	855.49	71.65	783.84
04/25/2011	805.34	16.48	788.86	794.18	8.79	785.39	791.94	7.65	784.29	789.79	3.86	785.93	855.49	72.08	783.41

Notes:

TOC = Top of casing.

DTW = Depth to water.

GWE = Groundwater elevation.

NI = Not installed.

TABLE 2

**DRY RUN CREEK SEDIMENT SUMMARY
FORMER RALSTON DISPOSAL SITE - CEDAR RAPIDS, IOWA**

Analyte	USEPA Region 5 Ecological Screening Level for Sediment ^a (µg/kg)	Consensus-Based Probable Effect Concentration (PEC) ^b (µg/kg)	Sample Concentration			
			DRC-01- SS-0-6 1992	DRC-02- SS-0-6 1992	DRC-03- SS-0-6 1992	DRC-04- SS-0-6 1992
VOCs (Reported Above MDL)						
Acetone	9.9	NE	11 U	12 U	23 JB	12 U
cis-1,2-Dichloroethene	NE	NE	11 U	4 J	14	12 U
Trichloroethene	112	NE	11 U	2 J	13 U	12 U
SVOCs (Reported Above MDL)						
Phenanthrene	204	1170	38 J	100 J	430 U	160 J
Anthracene	57.2	845	350 U	390 U	430 U	40 J
Fluoranthene	423	2230	77 J	190 J	430 U	340 J
Pyrene	195	1520	66 J	190 J	430 U	320 J
Benzo(a)Anthracene	108	1050	350 U	59 R	430 U	140 J
Chrysene	166	1290	37 J	94 R	430 U	130 J
Benzo(b)Fluoranthene	10,400	NE	40 J	100 J	430 U	140 J
Benzo(k)Fluoranthene	240	NE	350 U	57 J	430 U	84 J
Benzo(a)Pyrene	150	1450	350 U	69 J	430 U	120 J
Indeno(1,2,3-cd)Pyrene	200	NE	350 U	390 U	430 U	44 J
Metals						
Arsenic	9790	33,000	1400 B	1500 B	1100 B	1400 B
Barium	NE	NE	26,200 B	77,900	18,400 B	60,400
Cadmium	990	4980	1400	1800	1400	2000
Chromium	43,400	111,000	3300	5300	3200	5000
Copper	31,600	149,000	2200 B	5100 B	2000 B	2700 B
Lead	35,800	128,000	4800 J	17,100 J	3700 J	7500 J
Nickel	22,700	48,600	5000 B	5100 B	3200 B	4800 B
Silver	500	NE	640 U	710 U	740 U	700 U
Zinc	121,000	459,000	16,100 JB	20,900	14,400 JB	16,200 JB
Cyanide	0.1	NE	530 U	590 U	620 U	590 U

Notes:

All results are in micrograms per kilogram (µg/kg).

Analyte concentrations above the USEPA Region 5 Ecological Screening Level for Sediment are shown in bold text.

The analytical data summarized above are referenced from the March 1993 Removal Site Evaluation.

^a United States Environmental Protection Agency (USEPA) Resource Conservation and Recovery Act (RCRA) Ecological Screening Levels (August 22, 2003)

^b Consensus-based Probable Effect Concentration (PEC) for sediment in freshwater ecosystems are referenced from MacDonald, D.D., C.G. Ingersol and T.A. Berger, 2000. Development and Evaluation of Consensus-Based Sediment Quality Guidelines for Freshwater Ecosystems. Archives of Environmental Contamination and Toxicology 39:20-31.

NE = Not established.

VOCs = Volatile organic compounds.

SVOCs = Semivolatile organic compounds.

Data Qualifiers

B Indicates analyte detected in associated blank as well as in the sample.

J Indicates an estimated value.

U Indicates analyte was analyzed for but not detected at given detection limits.

R Indicates data rejected due to quality control criteria.

UJ Indicates approximate detection limit due to quality control criteria.

TABLE 3

SURFACE WATER DATA SUMMARY
FORMER RALSTON DISPOSAL SITE - CEDAR RAPIDS, IOWA

Analyte	USEPA Region 5 Ecological Screening Levels for Water (µg/L) ^o	Sample Identification													
		DRC-03- SW-1 ^a	DRC-03- SW-1 ^{a,d}	DRC-04- SW-1 ^a	DRC-05- SW-1 ^{a,c}	DRC-01- SW-1A ^b	DRC-02- SW-1A ^b	DRC-03- SW-1A ^b	DRC-04- SW-1A ^b	PZ-3A ^f	PZ-4A ^f	PZ-6A ^f	PZ-7 ^f	PZ-4-SW ^f	PZ-7-SW ^f
		1992	1992	1992	1992	1992	1992	1992	1992	1993	1993	1993	1993	1993	1993
VOCs (Reported Above MDL)															
Vinyl Chloride	930	20	9 J	3	3	2 U	2 U	8	5	NA	NA	NA	NA	NA	NA
Acetone	1700	2 U	22 JB	3	3	7 JB	2 JB	6 JB	7 JB	NA	NA	NA	NA	NA	NA
1,1-Dichloroethene	65	0.4 J	10 UJ	2 UJ	2 UJ	2 UJ	2 UJ	2 JB	2 UJ	NA	NA	NA	NA	NA	NA
cis-1,2-Dichloroethene	NE	92	68 J	8 JB	7 JB	2 U	0.3 J	29 J	22	11,175	265	10.9	4.4	9.4	12.1
trans-1,2-Dichloroethene	970	0.9 J	10 UJ	2 U	2 U	2 UJ	2 U	2 UJ	2 U	NA	NA	NA	NA	NA	NA
1,1,1-Trichloroethane	76	0.3 J	10 U	2 U	2 U	2 U	2 U	2 U	2 U	NA	NA	NA	NA	NA	NA
Trichloroethene	47	7 JB	10 U	1 J	1 J	2 U	2 U	2 U	2	13.3	24.2	1.0	ND ^g	ND	ND
Tetrachloroethene	45	0.7 J	10 U	2 U	2 U	2 U	2 U	2 U	0.4 J	NA	NA	NA	NA	NA	NA
Toluene	253	2 U	10 U	2 U	2 U	2 U	2 U	2 U	0.9 J	NA	NA	NA	NA	NA	NA
Total Xylenes	27	2 U	10 U	2 U	2 U	2 UJ	2 U	2 U	0.3 J	NA	NA	NA	NA	NA	NA
Metals															
Arsenic	148	3 U	NA	3 U	3 U	3 U	3 U	3 U	3 U	NA	NA	NA	NA	NA	NA
Barium	220	195 B	NA	142	141 B	35.4 B	43.6 JB	42.8 JB	62 JB	NA	NA	NA	NA	NA	NA
Cadmium	0.15	8	NA	3.1	3 U	3 U	3 U	3 U	3 U	NA	NA	NA	NA	NA	NA
Chromium	42	3 U	NA	3 U	3 U	3 U	3 U	3 U	3 U	NA	NA	NA	NA	NA	NA
Copper	1.58	12.9	NA	13.4	11.6	3 U	16.1	10.2	13	NA	NA	NA	NA	NA	NA
Lead	1.17	2.4 JB	NA	5.2 JB	6.1 JB	7 JB	7 JB	12.8 JB	10 JB	NA	NA	NA	NA	NA	NA
Nickel	28.9	6.8 JB	NA	8.1 JB	6 U	6 U	6 U	6 U	6 U	NA	NA	NA	NA	NA	NA
Silver	0.12	3 U	NA	3 U	3 U	3 U	3 U	3 U	3 U	NA	NA	NA	NA	NA	NA
Zinc	65.7	39.8 JB	NA	64.2 JB	26.1 JB	42.1 JB	38.1 JB	34.6 JB	48 JB	NA	NA	NA	NA	NA	NA
Cyanide	5.2	NA	NA	NA	NA	10 U	10 U	10 U	10 U	NA	NA	NA	NA	NA	NA

TABLE 3

SURFACE WATER DATA SUMMARY
FORMER RALSTON DISPOSAL SITE - CEDAR RAPIDS, IOWA

Notes:

All results are in microgram(s) per liter ($\mu\text{g/L}$).

Analytical results that exceed the USEPA Region 5 Ecological Screening Levels for Water are shown in bold text.

Analytical results summarized above are referenced from the March 1993 Removal Site Evaluation and the February 4, 1994 Phase 3 Project Update Memorandum.

^a Indicates collected under ponded conditions.

^b Indicates collected under flowing conditions.

^c Indicates sample is a duplicate of DRC-04-SW-1.

^d Indicates sample diluted and reanalyzed due to high concentrations.

^e United States Environmental Protection Agency (USEPA) Resource Conservation and Recovery Act (RCRA) Ecological

^f Sample analyzed with Rockwell International Corporation gas chromatograph.

^g Analytical data is listed as ND (not detected) as referenced in the February 4, 1994 report *Phase 3 Project Update Memorandum*.

NA Not analyzed.

VOCs = Volatile organic compounds.

Data Qualifiers


J Indicates an estimated value.

JB Indicates approximate data due to blank contamination.

U Indicates analyte was analyzed for but not detected at given detection limits.

UJ Indicates approximate detection limit due to quality control criteria.

FIGURES

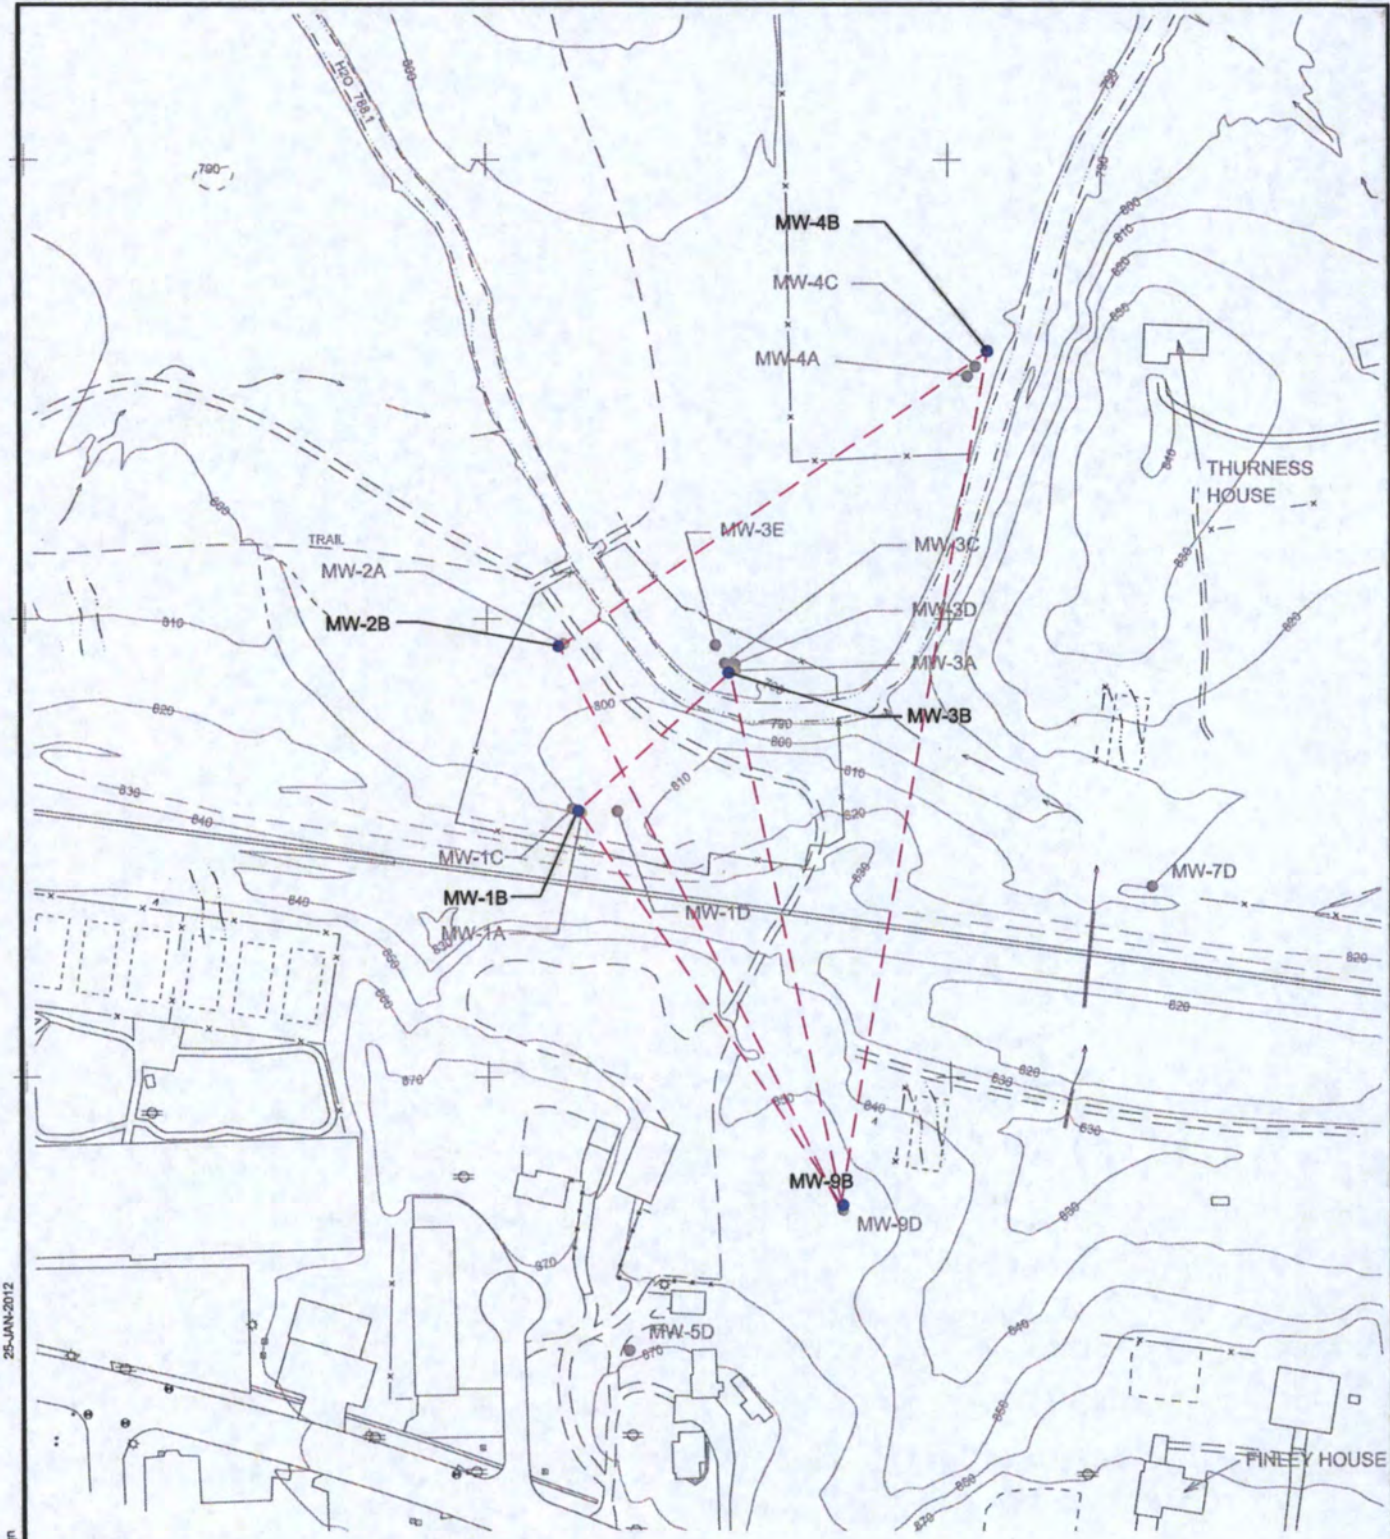


LEGEND:

- MONITORING WELL
- MONITORING WELL (DEVONIAN AQUIFER)
- - - "B" WELL GROUPINGS USED TO EVALUATE FLOW AZIMUTH CALCULATIONS

25-JAN-2012
\\uswest1a02\projects\CA\Devonwell\Cedar_Rapids\Relation\DAW.dgn

DESIGNED BY	
DRAWN BY	NORA DAY
CHECKED BY	MKE ALLOWITZ
APPROVED BY	
PROJECT MANAGER	STEVE VARSA
CLIENT APPROVAL	
CLIENT REFERENCE NO.	




PROJECT LOCATION	DES MOINES, IOWA
PROJECT	ROCKWELL COLLINS, INC CEDAR RAPIDS, IOWA
TITLE	DEVONIAN AQUIFER (B WELLS)

MWH

FIGURE 1 REVISION

FILE NAME

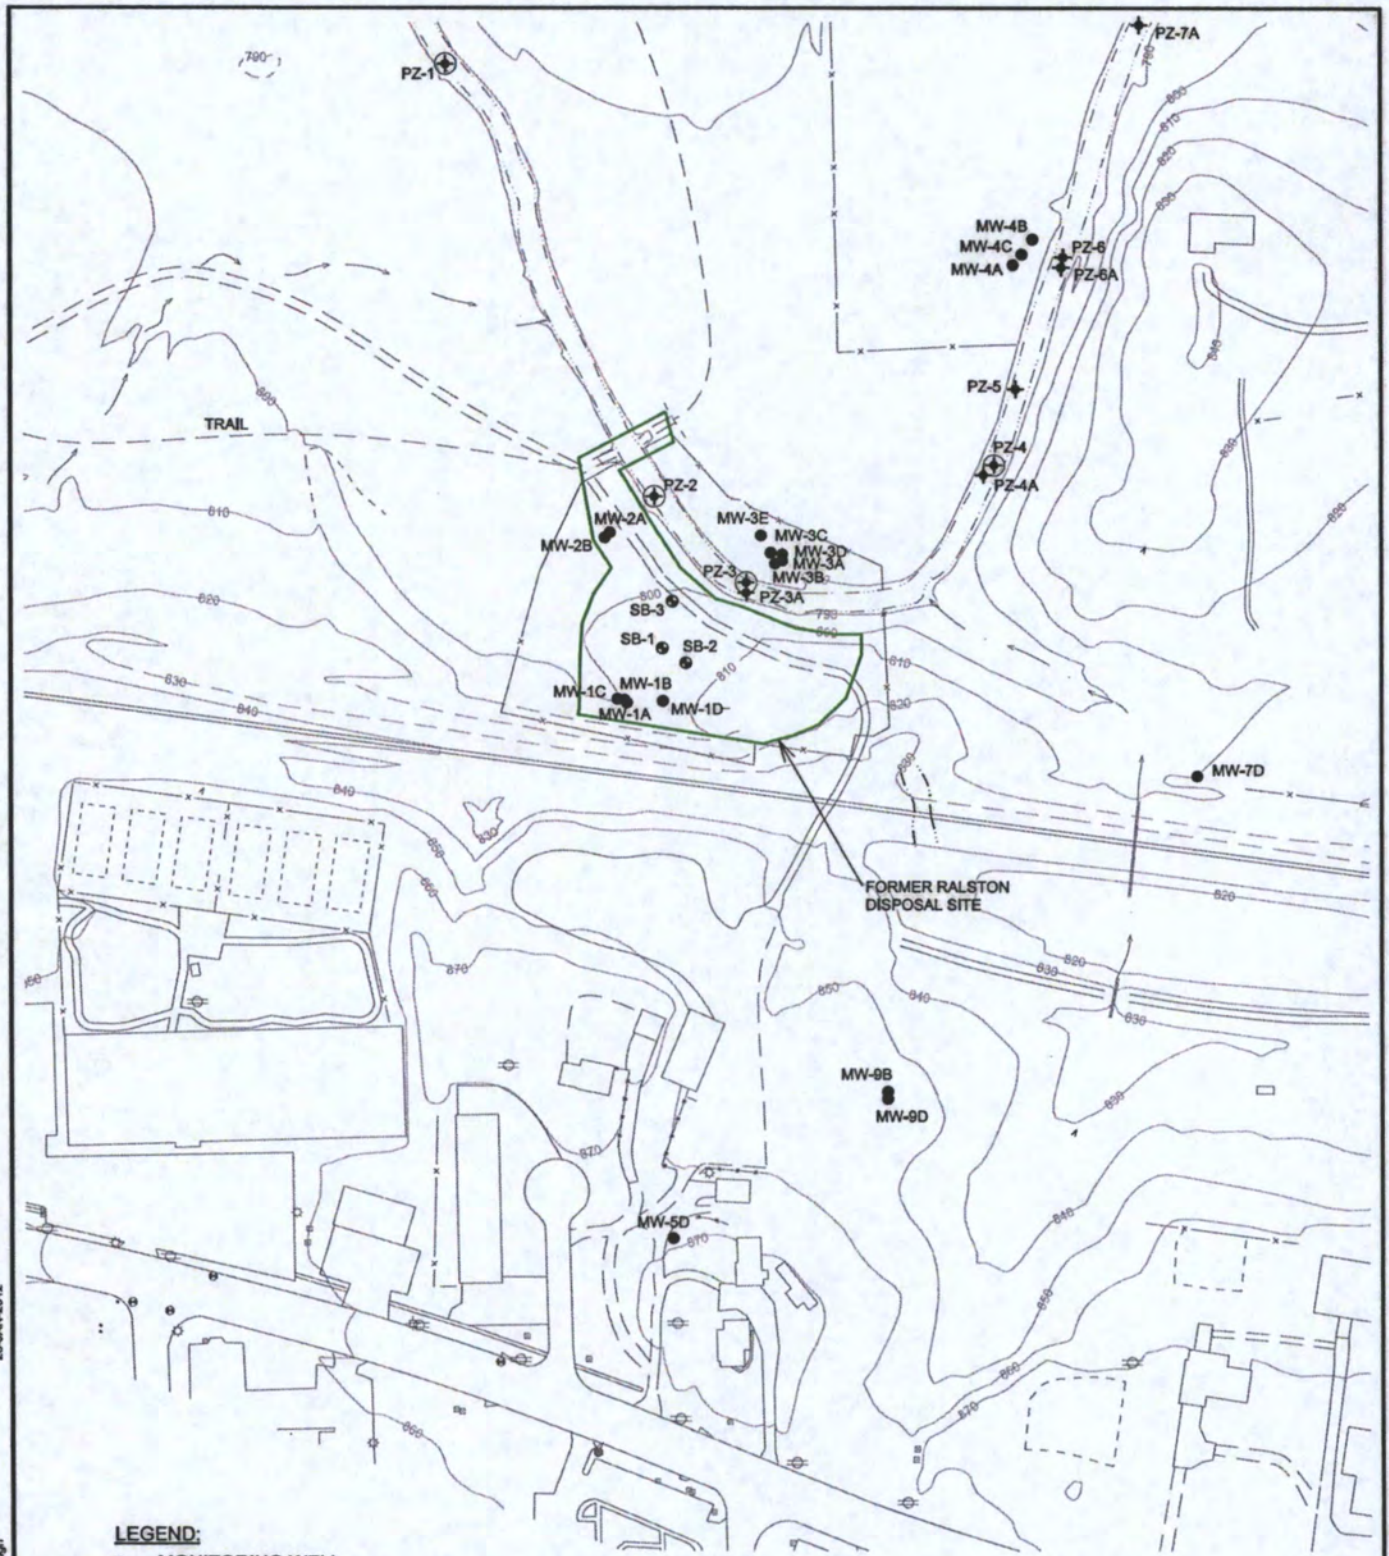


LEGEND:

- MONITORING WELL
- ⊕ PIEZOMETER (1992/1994) - SURFACE WATER SAMPLE LOCATION
- SOIL BORING (1992)
- EXTENT OF DISPOSAL AREA CAP AND STREAM BANK STABILIZATION MAT
- ⊕ PIEZOMETER (1982) - SURFACE WATER AND SEDIMENT SAMPLING LOCATION



25-JAN-2012
\\uswest1s02\projects\CAD\rockwell\Cedar Rapids\Pollution\SSL.dgn

DESIGNED BY	
CHECKED BY	NORA DAY
APPROVED BY	MIKE ALLOWITZ
PROJECT MANAGER	STEVE VARSA
CLIENT APPROVAL	
CLIENT REFERENCE NO.	



PROJECT LOCATION	DES MOINES, IOWA
PROJECT	ROCKWELL COLLINS, INC CEDAR RAPIDS, IOWA
TITLE	SELECTED SAMPLING LOCATIONS



FIGURE	2	REVISION	
FILE NAME			

ATTACHMENT A

Devonian Aquifer Gauging Data
 Former Ralston Disposal Site - Cedar Rapids
 Azimuth and Gradient Calculations: MW-1B/MW-3B/MW-9B

Horizontal Gradient:
 Azimuth (relative Distance to A)

Date	805.34			791.94			855.49			Notes	Horizontal Gradient:			Azimuth (relative Distance to A)					App. dip 1			
	TOC	DTW	GWE	TOC	DTW	GWE	TOC	DTW	GWE		Point A (MW-1B)	Point B (MW-3B)	Point C (MW-9B)	elevation A	elevation B	elevation C	inclination B	inclination C		Azimuth 1	Plunge 1	Azimuth 2
12/17/1992	801.10	10.98	793.12	792.30	6.34	785.96	NE	NE	NE	MW-9B not installed			790.120	785.960	NE	1.073	#VALUE!	48.130	1.073	147.200	#VALUE!	0.745
01/05/1993	801.10	11.46	789.64	792.30	7.00	785.30	NE	NE	NE	MW-9B not installed			789.640	785.300	NE	1.119	#VALUE!	48.130	1.119	147.200	#VALUE!	0.745
06/14/1993	801.10	10.05	791.05	792.30	6.22	786.08	NE	NE	NE	MW-9B not installed			791.050	786.080	NE	1.281	#VALUE!	48.130	1.281	147.200	#VALUE!	0.744
12/17/1993	801.10	14.01	787.09	792.30	7.98	784.32	NE	NE	NE	MW-9B not installed			787.090	784.320	NE	0.714	#VALUE!	48.130	0.714	147.200	#VALUE!	0.745
07/06/1994	801.10	12.93	788.17	792.30	7.74	784.56	NE	NE	NE	MW-9B not installed			788.170	784.560	NE	0.931	#VALUE!	48.130	0.931	147.200	#VALUE!	0.745
09/06/1994	805.34	18.78	786.56	791.94	8.56	783.38	855.49	72.64	782.85				786.560	783.380	782.850	0.820	0.415	48.130	0.820	147.200	0.415	0.745
12/12/1994	805.34	19.72	785.62	791.94	9.17	782.77	855.49	73.35	782.14				785.620	782.770	782.140	0.735	0.389	48.130	0.735	147.200	0.389	0.745
07/10/1995	805.34	17.05	788.29	791.94	7.16	784.78	855.49	71.31	784.18				788.290	784.780	784.180	0.905	0.459	48.130	0.905	147.200	0.459	0.745
09/20/1995	805.34	20.34	785.00	791.94	9.58	782.36	855.49	73.40	782.09				785.000	782.360	782.090	0.681	0.325	48.130	0.681	147.200	0.325	0.745
12/12/1995	805.34	20.71	784.63	791.94	10.24	781.7	855.49	74.11	781.38				784.630	781.700	781.380	0.755	0.363	48.130	0.755	147.200	0.363	0.745
04/08/1996	805.34	20.17	785.17	791.94	9.72	782.22	855.49	73.64	781.85				785.170	782.220	781.850	0.761	0.371	48.130	0.761	147.200	0.371	0.745
07/02/1996	805.34	16.39	788.35	791.94	7.19	784.75	855.49	71.46	784.03				788.350	784.750	784.030	1.083	0.550	48.130	1.083	147.200	0.550	0.745
09/12/1996	805.34	20.02	785.32	791.94	9.81	782.13	855.49	73.98	781.81				785.320	782.130	781.810	0.823	0.392	48.130	0.823	147.200	0.392	0.745
04/25/2001	805.34	14.56	790.78	791.94	6.96	784.98	855.49	71.41	784.08				790.780	784.980	784.080	1.465	0.749	48.130	1.465	147.200	0.749	0.744
10/22/2001	805.34	19.73	785.61	791.94	10.66	781.28	855.49	73.68	781.81				785.610	781.280	781.810	1.116	0.425	48.130	1.116	147.200	0.425	0.745
04/30/2002	805.34	17.19	788.15	791.94	7.94	784.00	855.49	72.26	783.23				788.150	784.000	783.230	1.070	0.550	48.130	1.070	147.200	0.550	0.745
10/22/2002	805.34	18.87	786.47	791.94	8.77	783.17	855.49	73.85	781.64				786.470	783.170	781.640	0.851	0.540	48.130	0.851	147.200	0.540	0.745
04/22/2003	805.34	20.67	784.67	791.94	10.53	781.41	855.49	74.53	780.96				784.670	781.410	780.960	0.841	0.415	48.130	0.841	147.200	0.415	0.745
10/28/2003	805.34	20.33	785.01	791.94	10.35	781.59	855.49	74.26	781.23				785.010	781.590	781.230	0.882	0.423	48.130	0.882	147.200	0.423	0.745
04/07/2004	805.34	16.87	788.47	791.94	7.81	784.13	855.49	74.30	781.19				788.470	784.130	781.190	1.119	0.814	48.130	1.119	147.200	0.814	0.745
10/26/2004	805.34	20.24	785.10	791.94	10.23	781.71	855.49	73.13	782.36				785.100	781.710	782.360	0.874	0.306	48.130	0.874	147.200	0.306	0.745
04/24/2005	805.34	20.61	784.73	791.94	11.07	780.87	855.49	75.34	780.15				784.730	780.870	780.150	0.995	0.512	48.130	0.995	147.200	0.512	0.745
10/25/2005	805.34	21.30	784.04	791.94	11.41	780.53	855.49	78.80	776.69				784.040	780.530	776.690	0.905	0.821	48.130	0.905	147.200	0.821	0.745
04/25/2006	805.34	18.02	787.32	791.94	8.77	783.17	855.49	73.13	782.36				787.320	783.170	782.360	1.070	0.554	48.130	1.070	147.200	0.554	0.745
04/24/2007	805.34	15.72	789.62	791.94	7.42	784.52	855.49	71.90	783.59				789.620	784.520	783.590	1.315	0.674	48.130	1.315	147.200	0.674	0.744
04/01/2008	805.34	12.86	792.48	791.94	5.98	785.96	855.49	70.61	784.88				792.480	785.960	784.880	1.681	0.849	48.130	1.681	147.200	0.849	0.744
04/13/2009	805.34	17.00	788.34	791.94	8.00	783.84	855.49	72.37	783.12				788.340	783.840	783.120	1.134	0.583	48.130	1.134	147.200	0.583	0.745
05/04/2010	805.34	15.55	789.79	791.94	7.30	784.64	855.49	71.65	783.84				789.790	784.640	783.840	1.328	0.685	48.130	1.328	147.200	0.685	0.744
04/25/2011	805.34	16.48	788.86	791.94	7.65	784.29	855.49	72.08	783.41				788.860	784.290	783.410	1.178	0.609	48.130	1.178	147.200	0.609	0.745

Devonian Aquifer Gauging Data
 Former Ralston Disposal Site - Cedar Rapids
 Azimuth and Gradient Calculations: MW-1B/MW-3B/MMW-9B

App. dip 2				Theta		Lower Hemisphere	Cross-product	Pole		Pole	Strike of	True	Hydraulic Flow				
Cos(beta)	Cos(gamma)	Cos(alpha)	Cos(beta)	Cos(gamma)	Angle(radians)	Flag	Cos(beta)	Cos(beta)	Cos(gamma)	Azimuth	Plunge	Plane	Dip	Strike & Dip	degrees	m/m	Horizontal Gradient
#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!
0.667	0.019	#VALUE!	#VALUE!	#VALUE!	1.729	-1.000	-0.017	-0.002	1.000	262.022	89.01	N 58.47 W	0.99 NE	N 58.47 W 0.99 NE	82.022	17.241	0.0172
0.667	0.020	#VALUE!	#VALUE!	#VALUE!	1.729	-1.000	-0.016	-0.002	1.000	262.954	89.10	N 58.47 W	0.90 NE	N 58.47 W 0.90 NE	82.954	15.624	0.0156
0.667	0.022	#VALUE!	#VALUE!	#VALUE!	1.729	-1.000	-0.019	-0.003	1.000	262.096	88.91	N 58.47 W	1.09 NE	N 58.47 W 1.09 NE	82.096	19.046	0.0190
0.667	0.012	#VALUE!	#VALUE!	#VALUE!	1.729	-1.000	-0.014	-0.002	1.000	260.891	89.19	N 58.47 W	0.81 NE	N 58.47 W 0.81 NE	80.891	14.129	0.0141
0.667	0.016	#VALUE!	#VALUE!	#VALUE!	1.729	-1.000	-0.016	-0.002	1.000	261.014	89.10	N 58.47 W	0.90 NE	N 58.47 W 0.90 NE	81.014	15.702	0.0157
0.667	0.014	0.542	-0.841	0.007	1.729	-1.000	-0.023	-0.003	1.000	262.104	88.59	N 58.47 W	1.31 NE	N 58.47 W 1.31 NE	81.301	15.861	0.0159
0.667	0.013	0.542	-0.841	0.007	1.729	-1.000	-0.017	-0.002	1.000	261.301	89.08	N 58.47 W	0.91 NE	N 58.47 W 0.91 NE	82.104	22.793	0.0228
0.667	0.016	0.542	-0.841	0.008	1.729	-1.000	-0.017	-0.003	1.000	260.858	89.02	N 58.47 W	0.98 NE	N 58.47 W 0.98 NE	80.858	17.065	0.0171
0.667	0.012	0.542	-0.841	0.006	1.729	-1.000	-0.031	-0.004	1.000	261.822	88.20	N 58.47 W	1.80 NE	N 58.47 W 1.80 NE	81.822	31.372	0.0314
0.667	0.013	0.542	-0.841	0.006	1.729	-1.000	-0.022	-0.005	1.000	256.715	88.73	N 58.47 W	1.27 NE	N 58.47 W 1.27 NE	76.715	22.192	0.0222
0.667	0.013	0.542	-0.841	0.006	1.729	-1.000	-0.022	-0.003	1.000	262.348	88.71	N 58.47 W	1.29 NE	N 58.47 W 1.29 NE	82.348	22.586	0.0226
0.667	0.019	0.542	-0.841	0.010	1.729	-1.000	-0.019	-0.001	1.000	266.864	88.91	N 58.47 W	1.09 NE	N 58.47 W 1.09 NE	86.864	19.039	0.0190
0.667	0.014	0.542	-0.841	0.007	1.729	-1.000	-0.017	-0.003	1.000	261.523	88.99	N 58.47 W	1.01 NE	N 58.47 W 1.01 NE	81.523	17.572	0.0176
0.667	0.026	0.542	-0.841	0.013	1.729	-1.000	-0.018	-0.003	1.000	260.944	88.95	N 58.47 W	1.05 NE	N 58.47 W 1.05 NE	80.944	16.314	0.0163
0.667	0.019	0.542	-0.841	0.007	1.729	-1.000	-0.026	0.000	1.000	269.989	88.50	N 58.47 W	1.50 NE	N 58.47 W 1.50 NE	89.989	26.225	0.0262
0.667	0.015	0.542	-0.841	0.005	1.729	-1.000	-0.017	-0.004	1.000	255.353	89.02	N 58.47 W	0.98 NE	N 58.47 W 0.98 NE	75.353	17.157	0.0172
0.667	0.017	0.542	-0.841	0.009	1.729	-1.000	-0.021	-0.003	1.000	262.365	88.80	N 58.47 W	1.20 NE	N 58.47 W 1.20 NE	82.365	21.012	0.0210
0.667	0.016	0.542	-0.841	0.014	1.729	-1.000	-0.023	0.002	1.000	275.302	88.67	N 58.47 W	1.33 SE	N 58.47 W 1.33 SE	95.302	23.237	0.0232
0.667	0.019	0.542	-0.841	0.010	1.729	-1.000	-0.022	-0.003	1.000	262.513	88.70	N 58.47 W	1.30 NE	N 58.47 W 1.30 NE	82.513	22.631	0.0226
0.667	0.023	0.542	-0.841	0.012	1.729	-1.000	-0.027	-0.004	1.000	262.293	88.41	N 58.47 W	1.59 NE	N 58.47 W 1.59 NE	82.293	27.739	0.0277
0.667	0.029	0.542	-0.841	0.015	1.729	-1.000	-0.035	-0.005	0.999	262.904	87.98	N 58.47 W	2.02 NE	N 58.47 W 2.02 NE	87.004	35.342	0.0353
0.667	0.020	0.542	-0.841	0.010	1.729	-1.000	-0.024	-0.003	1.000	262.362	88.63	N 58.47 W	1.37 NE	N 58.47 W 1.37 NE	82.362	23.951	0.0240
0.667	0.023	0.542	-0.841	0.012	1.729	-1.000	-0.028	-0.004	1.000	261.825	88.40	N 58.47 W	1.60 NE	N 58.47 W 1.60 NE	81.825	27.857	0.0279
0.667	0.021	0.542	-0.841	0.011	1.729	-1.000	-0.025	-0.003	1.000	262.468	88.57	N 58.47 W	1.43 NE	N 58.47 W 1.43 NE	82.468	24.908	0.0249

Devonian Aquifer Gauging Data
 Former Raton Disposal Site - Cedar Rapids
 Azimuth and Gradient Calculations: MW-2B/MW-4B/MW-9B


Horizontal Gradient:
 Azimuth (relative Distance to A)

TOC	794.18			789.79			855.49			Point A (MW-2B) Point B (MW-4B) Point C (MW-9B)	Horizontal Gradient: Azimuth (relative Distance to A)			inclin B	inclin C	Azimuth 1	Plunge 1	Azimuth 2	Plunge 2	Apo. dip 1 Cos(alpha)
	MW-2B	MW-4B	MW-9B	elevation A	elevation B	elevation C														
12/17/1992	794.57	6.96	787.61	790.03	2.60	787.43	NE	NE	NE	787.610	787.430	NE	0.019	#VALUE!	56.400	0.019	154.200	#VALUE!	0.833	
01/05/1993	794.57	7.60	786.97	790.03	3.36	786.67	NE	NE	NE	786.970	786.670	NE	0.031	#VALUE!	56.400	0.031	154.200	#VALUE!	0.833	
06/14/1993	794.57	6.98	787.59	790.03	3.33	786.70	NE	NE	NE	787.590	786.700	NE	0.092	#VALUE!	56.400	0.092	154.200	#VALUE!	0.833	
12/17/1993	794.57	9.15	785.42	790.03	4.75	785.28	NE	NE	NE	785.420	785.280	NE	0.015	#VALUE!	56.400	0.015	154.200	#VALUE!	0.833	
07/06/1994	794.57	8.59	785.98	790.03	4.59	785.44	NE	NE	NE	785.980	785.440	NE	0.056	#VALUE!	56.400	0.056	154.200	#VALUE!	0.833	
09/06/1994	794.18	10.04	784.14	789.79	5.50	784.29	855.49	855.49	855.49	784.140	784.290	782.850	-0.016	0.109	56.400	-0.016	154.200	0.109	0.833	
12/12/1994	794.18	10.82	783.36	789.79	5.93	783.86	855.49	855.49	855.49	783.360	783.860	782.140	-0.052	0.103	56.400	-0.052	154.200	0.103	0.833	
07/10/1995	794.18	8.37	785.81	789.79	4.71	785.08	855.49	855.49	855.49	785.810	785.080	784.180	0.076	0.138	56.400	0.076	154.200	0.138	0.833	
09/20/1995	794.18	11.86	782.32	789.79	6.71	783.08	855.49	855.49	855.49	782.320	783.080	782.090	-0.079	0.019	56.400	-0.079	154.200	0.019	0.833	
12/12/1995	794.18	12.47	781.71	789.79	6.73	783.06	855.49	855.49	855.49	781.710	783.060	781.380	-0.140	0.028	56.400	-0.140	154.200	0.028	0.833	
04/08/1996	794.18	12.02	782.16	789.79	6.30	783.49	855.49	855.49	855.49	782.160	783.490	781.850	-0.138	0.026	56.400	-0.138	154.200	0.026	0.833	
07/02/1996	794.18	8.03	786.15	789.79	4.18	785.61	855.49	855.49	855.49	786.150	785.610	784.030	0.056	0.179	56.400	0.056	154.200	0.179	0.833	
09/12/1996	794.18	12.02	782.16	789.79	6.83	782.96	855.49	855.49	855.49	782.160	782.960	781.810	-0.083	0.030	56.400	-0.083	154.200	0.030	0.833	
04/25/2001	794.18	7.69	786.49	789.79	3.26	786.53	855.49	855.49	855.49	786.490	786.530	784.080	-0.004	0.203	56.400	-0.004	154.200	0.203	0.833	
10/22/2001	794.18	12.01	782.17	789.79	6.04	783.75	855.49	855.49	855.49	782.170	783.750	781.810	-0.164	0.030	56.400	-0.164	154.200	0.030	0.833	
04/30/2002	794.18	9.26	784.92	789.79	4.21	785.58	855.49	855.49	855.49	784.920	785.580	783.230	-0.068	0.143	56.400	-0.068	154.200	0.143	0.833	
10/22/2002	794.18	10.74	783.44	789.79	5.40	784.39	855.49	855.49	855.49	783.440	784.390	781.640	-0.098	0.152	56.400	-0.098	154.200	0.152	0.833	
06/22/2003	794.18	12.95	781.23	789.79	6.20	783.59	855.49	855.49	855.49	781.230	783.590	780.960	-0.245	0.023	56.400	-0.245	154.200	0.023	0.833	
10/28/2003	794.18	12.68	781.5	789.79	6.59	783.2	855.49	855.49	855.49	781.500	783.200	781.230	-0.176	0.023	56.400	-0.176	154.200	0.023	0.833	
04/07/2004	794.18	8.87	785.31	789.79	4.57	785.22	855.49	855.49	855.49	785.310	785.220	781.190	0.009	0.348	56.400	0.009	154.200	0.348	0.833	
10/26/2004	794.18	12.52	781.66	789.79	6.49	783.30	855.49	855.49	855.49	781.660	783.300	782.360	-0.170	-0.059	56.400	-0.170	154.200	-0.059	0.833	
04/24/2005	794.18	12.79	781.39	789.79	7.61	782.18	855.49	855.49	855.49	781.390	782.180	780.150	-0.082	0.105	56.400	-0.082	154.200	0.105	0.833	
10/25/2005	794.18	14.43	779.75	789.79	8.00	781.79	855.49	855.49	855.49	779.750	781.790	776.690	-0.211	0.258	56.400	-0.211	154.200	0.258	0.833	
04/25/2006	794.18	10.18	784.00	789.79	5.17	784.62	855.49	855.49	855.49	784.000	784.620	782.360	-0.064	0.138	56.400	-0.064	154.200	0.138	0.833	
04/24/2007	794.18	8.28	785.90	789.79	4.06	785.73	855.49	855.49	855.49	785.900	785.730	783.590	0.018	0.195	56.400	0.018	154.200	0.195	0.833	
04/01/2008	794.18	6.35	787.83	789.79	2.48	787.31	855.49	855.49	855.49	787.830	787.310	784.880	0.054	0.249	56.400	0.054	154.200	0.249	0.833	
04/13/2009	794.18	9.29	784.89	789.79	4.52	785.27	855.49	855.49	855.49	784.890	785.270	783.120	-0.039	0.149	56.400	-0.039	154.200	0.149	0.833	
05/04/2010	794.18	8.43	785.75	789.79	3.82	785.97	855.49	855.49	855.49	785.750	785.970	783.840	-0.023	0.161	56.400	-0.023	154.200	0.161	0.833	
04/25/2011	794.18	8.79	785.39	789.79	3.86	785.93	855.49	855.49	855.49	785.390	785.930	783.410	-0.056	0.167	56.400	-0.056	154.200	0.167	0.833	


Devonian Aquifer Gauging Data
 Former Ráston Disposal Site - Cedar Rapids
 Azimuth and Gradient Calculations: MW-2B/MW-4B/MW-9B

App dip 2		Theta		Lower Hemisphere		Cross-product		Pole		Pole		Strike of		True		Hydraulic Flow Azimuth		Horizontal Gradient		Horizontal Gradient		
Cos(beta)	Cos(gamma)	Cos(alpha)	Cos(beta)	Cos(gamma)	Angle(radians)	Flag	Cos(alpha)	Cos(beta)	Cos(gamma)	Azimuth	Plunge	Plane	Dip	Strike & Dip	degrees	m/km	m/m	m/m	m/m	m/m	m/m	
0.553	0.000	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	N 58.47 W	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!
0.553	0.001	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	N 58.47 W	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!
0.553	0.002	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	N 58.47 W	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!
0.553	0.000	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	N 58.47 W	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!
0.553	0.001	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	N 58.47 W	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!	#VALUE!
0.553	0.000	0.435	-0.900	0.002	1.707	-1.000	-0.001	0.002	1.000	334.606	89.89	N 58.47 W	0.11 SE	N 58.47 W 0.11 SE	154.806	1.900	0.0019					
0.553	-0.001	0.435	-0.900	0.002	1.707	-1.000	0.000	0.002	1.000	354.544	89.89	N 58.47 W	0.11 SE	N 58.47 W 0.11 SE	174.544	1.917	0.0019					
0.553	0.001	0.435	-0.900	0.002	1.707	-1.000	-0.003	0.001	1.000	299.523	89.83	N 58.47 W	0.17 SE	N 58.47 W 0.17 SE	119.523	2.920	0.0029					
0.553	-0.001	0.435	-0.900	0.000	1.707	-1.000	0.001	0.001	1.000	50.017	89.92	N 58.47 W	0.08 SW	N 58.47 W 0.08 SW	230.017	1.383	0.0014					
0.553	-0.002	0.435	-0.900	0.000	1.707	-1.000	0.002	0.001	1.000	52.737	89.86	N 58.47 W	0.14 SW	N 58.47 W 0.14 SW	232.737	2.446	0.0024					
0.553	-0.002	0.435	-0.900	0.000	1.707	-1.000	0.002	0.001	1.000	53.270	89.86	N 58.47 W	0.14 SW	N 58.47 W 0.14 SW	233.270	2.409	0.0024					
0.553	0.001	0.435	-0.900	0.003	1.707	-1.000	-0.003	0.002	1.000	309.850	89.80	N 58.47 W	0.20 SE	N 58.47 W 0.20 SE	129.850	3.428	0.0034					
0.553	-0.001	0.435	-0.900	0.001	1.707	-1.000	0.001	0.001	1.000	43.842	89.92	N 58.47 W	0.08 SW	N 58.47 W 0.08 SW	223.842	1.462	0.0015					
0.553	0.000	0.435	-0.900	0.004	1.707	-1.000	-0.002	0.003	1.000	327.560	89.80	N 58.47 W	0.20 SE	N 58.47 W 0.20 SE	147.560	3.574	0.0036					
0.553	-0.003	0.435	-0.900	0.001	1.707	-1.000	0.002	0.002	1.000	53.516	89.84	N 58.47 W	0.16 SW	N 58.47 W 0.16 SW	233.516	2.861	0.0029					
0.553	-0.001	0.435	-0.900	0.002	1.707	-1.000	0.000	0.003	1.000	353.330	89.85	N 58.47 W	0.15 SE	N 58.47 W 0.15 SE	173.330	2.635	0.0026					
0.553	-0.002	0.435	-0.900	0.003	1.707	-1.000	0.000	0.003	1.000	1.535	89.83	N 58.47 W	0.17 SW	N 58.47 W 0.17 SW	181.535	2.985	0.0030					
0.553	-0.004	0.435	-0.900	0.000	1.707	-1.000	0.004	0.002	1.000	58.857	89.76	N 58.47 W	0.24 SW	N 58.47 W 0.24 SW	238.857	4.272	0.0043					
0.553	-0.003	0.435	-0.900	0.000	1.707	-1.000	0.003	0.002	1.000	56.766	89.82	N 58.47 W	0.18 SW	N 58.47 W 0.18 SW	236.766	3.074	0.0031					
0.553	0.000	0.435	-0.900	0.008	1.707	-1.000	-0.004	0.005	1.000	324.884	89.65	N 58.47 W	0.35 SE	N 58.47 W 0.35 SE	144.884	6.151	0.0062					
0.553	-0.003	0.435	-0.900	-0.001	1.707	-1.000	0.003	0.000	1.000	82.410	89.61	N 58.47 W	0.19 SW	N 58.47 W 0.19 SW	262.410	3.300	0.0033					
0.553	-0.001	0.435	-0.900	0.002	1.707	-1.000	0.000	0.002	1.000	7.318	89.88	N 58.47 W	0.12 SW	N 58.47 W 0.12 SW	187.318	2.181	0.0022					
0.553	-0.004	0.435	-0.900	0.005	1.707	-1.000	0.001	0.005	1.000	8.766	89.69	N 58.47 W	0.31 SW	N 58.47 W 0.31 SW	188.766	5.474	0.0055					
0.553	-0.001	0.435	-0.900	0.002	1.707	-1.000	0.000	0.003	1.000	352.535	89.65	N 58.47 W	0.15 SE	N 58.47 W 0.15 SE	172.535	2.545	0.0025					
0.553	0.000	0.435	-0.900	0.003	1.707	-1.000	-0.002	0.003	1.000	321.347	89.80	N 58.47 W	0.20 SE	N 58.47 W 0.20 SE	141.347	3.491	0.0035					
0.553	0.001	0.435	-0.900	0.004	1.707	-1.000	-0.003	0.003	1.000	314.636	89.74	N 58.47 W	0.26 SE	N 58.47 W 0.26 SE	134.636	4.612	0.0046					
0.553	-0.001	0.435	-0.900	0.003	1.707	-1.000	-0.001	0.002	1.000	341.551	89.85	N 58.47 W	0.15 SE	N 58.47 W 0.15 SE	161.551	2.629	0.0026					
0.553	0.000	0.435	-0.900	0.003	1.707	-1.000	-0.001	0.003	1.000	334.528	89.84	N 58.47 W	0.16 SE	N 58.47 W 0.16 SE	154.528	2.814	0.0028					
0.553	-0.001	0.435	-0.900	0.003	1.707	-1.000	-0.001	0.003	1.000	345.560	89.83	N 58.47 W	0.17 SE	N 58.47 W 0.17 SE	165.560	2.975	0.0030					

GRAPH A-1: Groundwater Flow Direction and Gradient - MW-1, MW-3, and MW-9

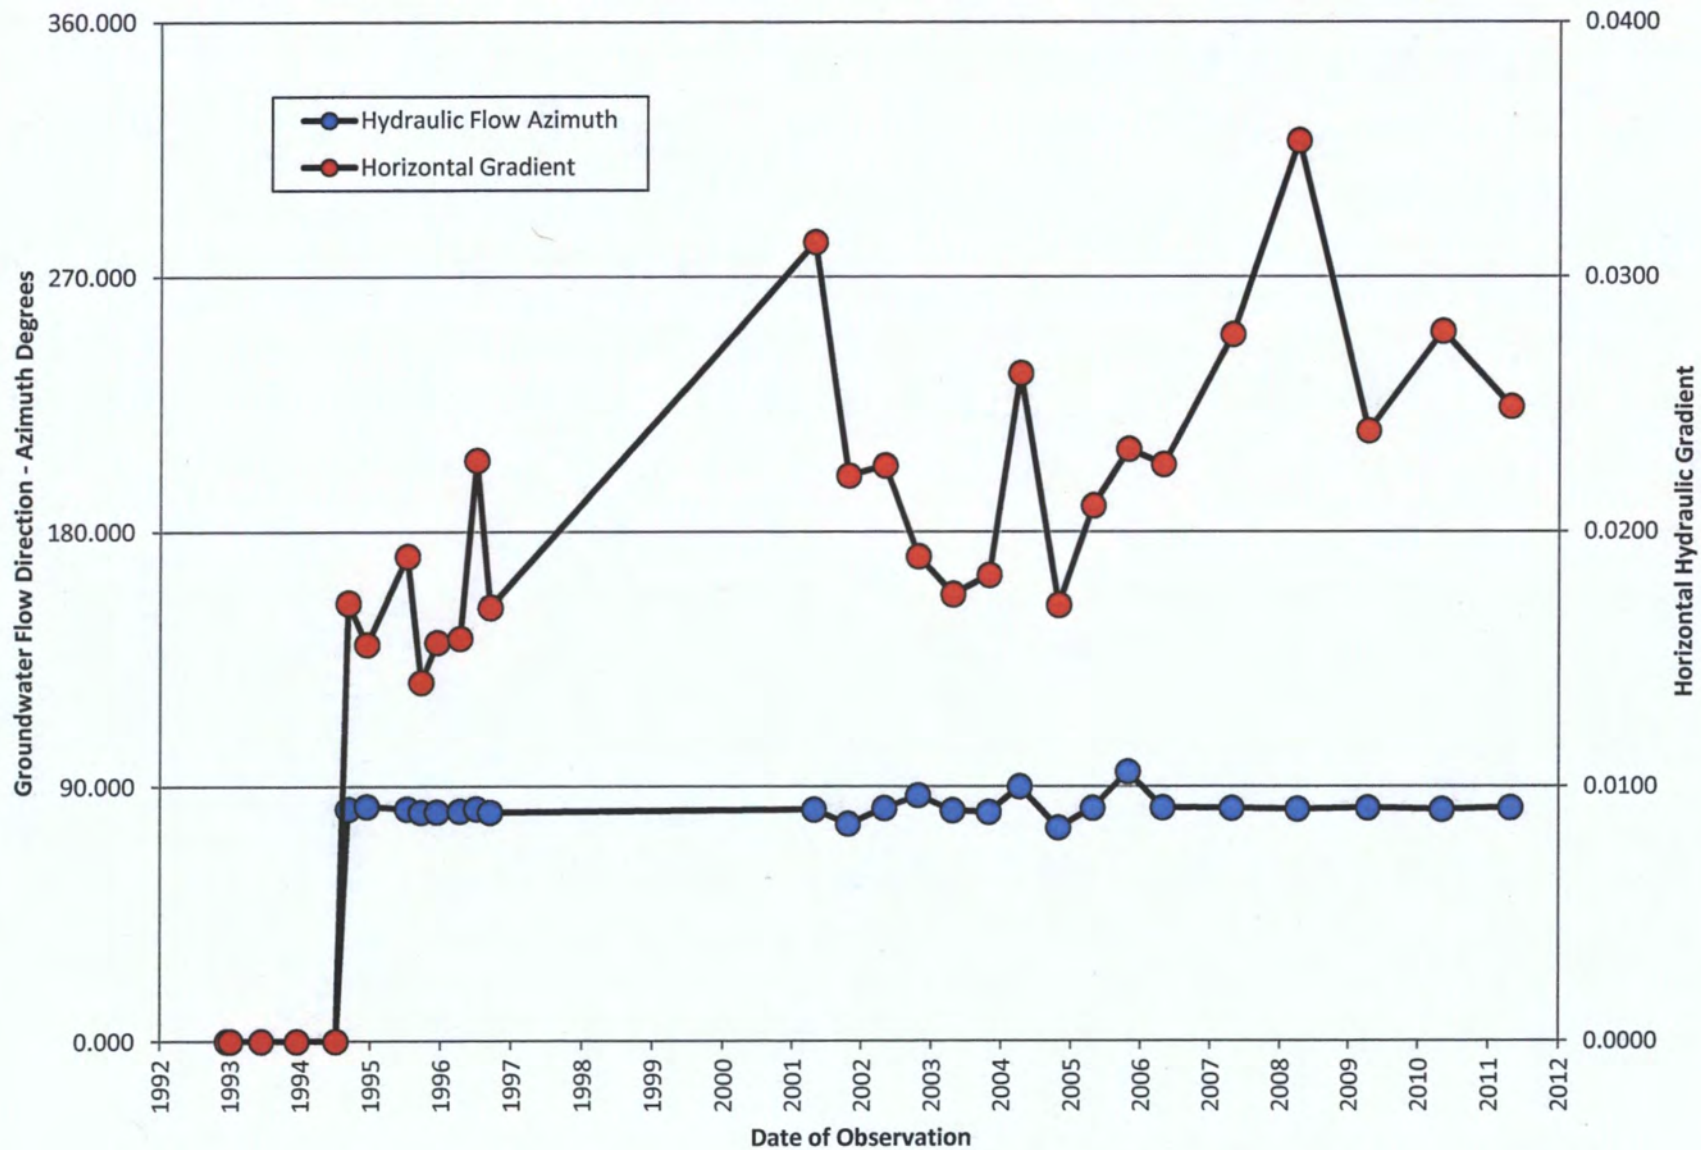

GRAPH A-2: Groundwater Flow Direction and Gradient - MW-2, MW-4, and MW-9

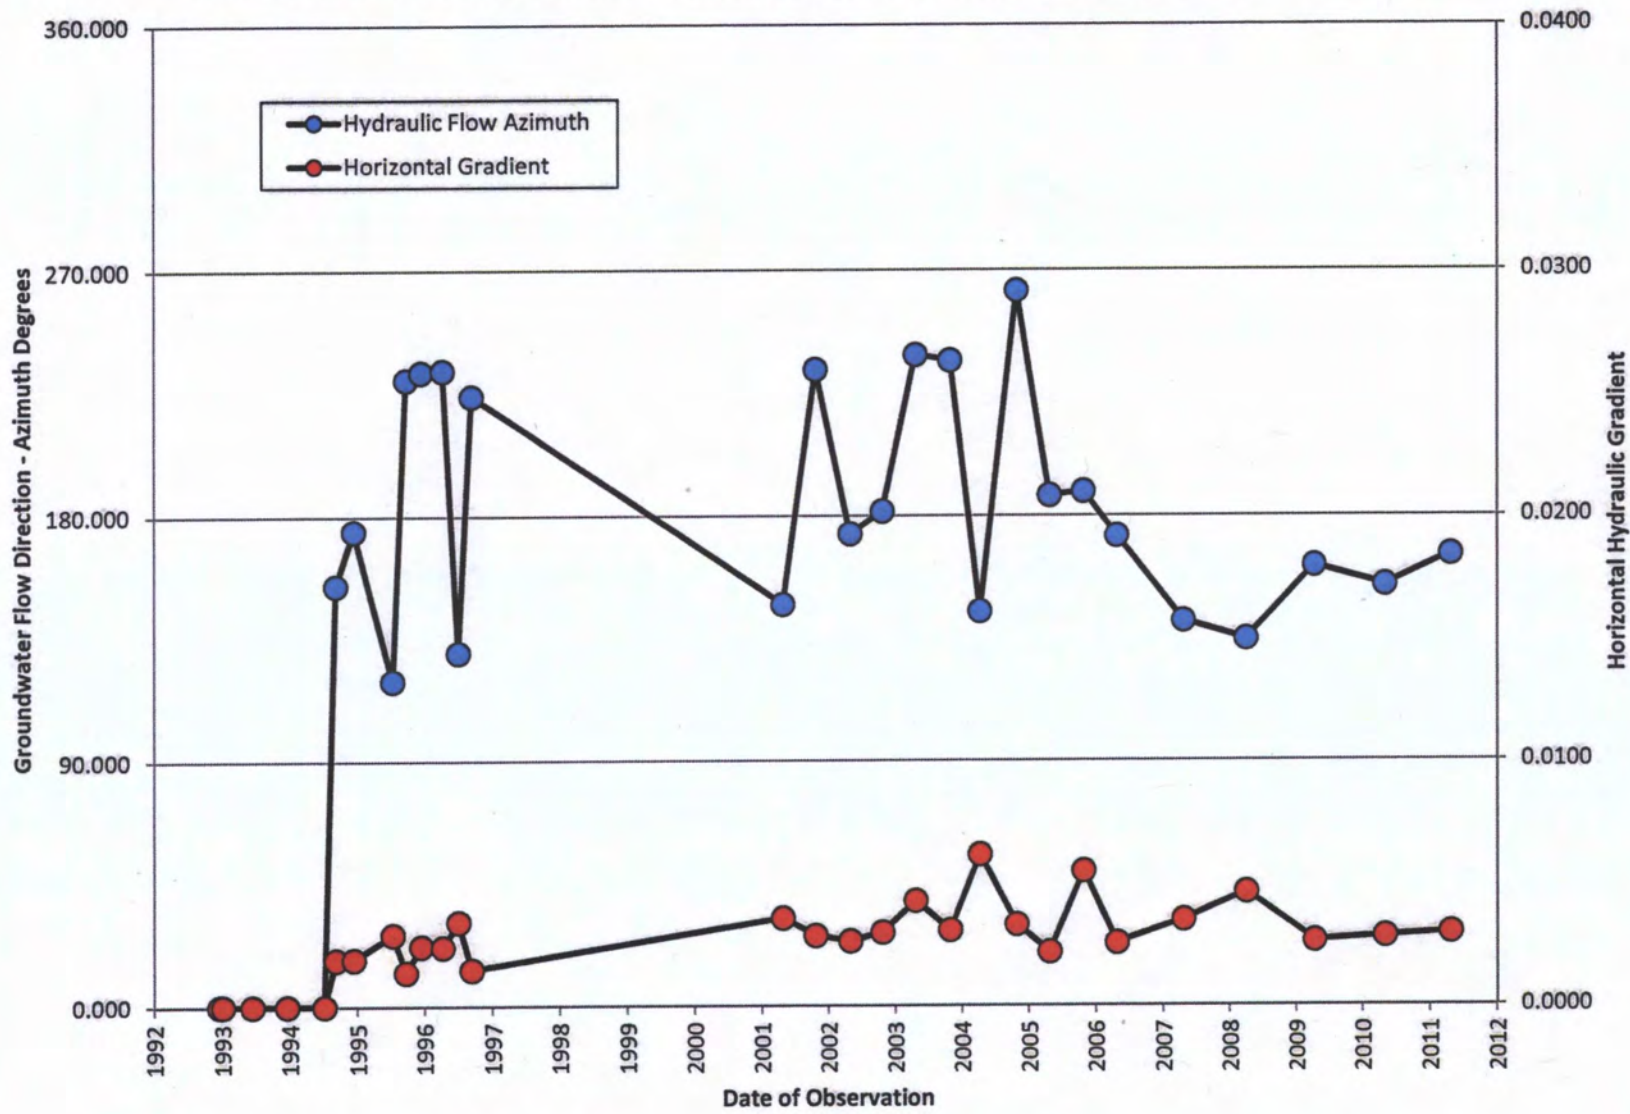

ATTACHMENT B

Rockwell Collins, Inc. (Rockwell Collins) has conducted an evaluation of the potential for vapor intrusion at the former Ralston Disposal site in Cedar Rapids, Iowa (Site).

1.1 GUIDANCE

United States Environmental Protection Agency (USEPA) Region 7 conducted a five-year review of the remedial actions implemented at the Ralston Site pursuant to the Comprehensive Environmental Response, Compensation, and Liability Act of 1980, as amended (CERCLA), and the National Contingency Plan (NCP). Accordingly, the following documents were identified as applicable guidance for the Site vapor intrusion evaluation:

- *Office of Solid Waste and Emergency Response (OSWER) Draft Guidance for Evaluating the Vapor Intrusion to Indoor Air Pathway from Groundwater and Soils (Subsurface Vapor Intrusion Guidance)* (USEPA, 2002).
- *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).
- *Vapor Intrusion Pathway: A Practical Guide* (Interstate Technology & Regulatory Council [ITRC], 2007).
- *Draft USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors* (USEPA, 2008).
- *Risk Assessment Guidance for Superfund (RAGS), Volume 1, Human Health Evaluation Manual, (Part F, Supplement Guidance for Inhalation Risk Assessment)* (USEPA, 2009).
- *Review of the Draft 2002 Subsurface Vapor Intrusion Guidance* (USEPA, 2011a)
- *Regional Screening Table User's Guide* (USEPA, 2011b).

Applicable state-specific guidance was not identified for Iowa.

1.2 PRELIMINARY SCREENING

The USEPA and ITRC guidance documents include a similar preliminary screening process to assess the potential for vapor intrusion at a site (USEPA, 2002; ITRC, 2007). A preliminary screening process based on these guidance documents is outlined in subsections 1.2.1 through 1.2.7 and is used to assess the potential for vapor intrusion.

1.2.1 Step 1 – Is an Acute Exposure Present? (No)

An acute or emergency hazard resulting from vapor intrusion in the site vicinity is not suspected. Indicators of acute scenarios, such as odors, physiological symptoms, wet basements, and/or measured or likely explosive, acutely toxic, corrosive, or chemically reactive vapor concentrations, have not been reported in buildings or connecting utility conduits in the Site vicinity.

1.2.2 Step 2 – Is Site Characterization Sufficient? (Yes)

The Site has documented soil and groundwater impacts resulting from former industrial waste disposal activities. The following components of the Site conceptual model are presented in the Remedial Investigation Report (RI Report) (MWH, 1997): site characterization, nature and extent of contamination, removal actions, contaminant fate and transport, risk assessment, and institutional controls.

Soil impacts remain in unsaturated soil on site in the former disposal area, which has been capped. There are no buildings located on site or within 300 feet of the Site. The potential for vapor intrusion from soil impacts would exist if a future building without vapor mitigation controls would be built within 100 feet of the former disposal area. However, the former disposal area and the surrounding 100-foot perimeter are either located within property controlled by Rockwell Collins and listed on the State of Iowa Registry of Hazardous Waste or Hazardous Waste Substance Disposal Sites, or within the Chicago Northwestern Transportation Company Property, as shown in Figure B-1. Therefore, institutional controls and land use control the future potentially complete vapor intrusion pathway from unsaturated soil impacts.

Based on the Site conceptual model, impacted groundwater is a potential source of contamination to indoor air in buildings in the Site vicinity. The vapor intrusion pathway was evaluated at each of the current monitoring well locations.

The extent of the alluvial aquifer groundwater impacts is depicted in Figure 5-2 of the RI Report. The highest volatile organic compound (VOC) concentrations have been historically detected near the central portion of the Site with the alluvial groundwater plume underlying the Site and extending north of the Site. The lateral extent of the alluvial aquifer groundwater plume generally follows the channel of Dry Run Creek to the northwest and northeast, which is consistent with the alluvial groundwater flow system. The extent of the alluvial aquifer has also been delineated on site to the south, in the direction of the nearest existing off-site buildings, as depicted in Figure 5-2 of the RI Report.

The extents of the Devonian and Silurian bedrock aquifer groundwater impacts are depicted in Figures 5-4 and 5-5, respectively, of the RI Report. In the Devonian and Silurian aquifers, the highest VOC concentrations have been historically detected north of the Site with groundwater impacts underlying the Site and extending off site to the south. The lateral extent of the bedrock aquifers is consistent with a predominantly southeastern direction of groundwater flow.

1.2.3 Step 3 – Are Contaminants of Potential Concern Sufficiently Volatile and Toxic? (Yes)

USEPA considers a chemical to be sufficiently volatile if the Henry's Law Constant is equal to or greater than 1×10^{-5} atmosphere-cubic meter per mole (USEPA, 2002). USEPA considers a chemical to be sufficiently toxic if the vapor concentration of the pure component poses an incremental lifetime cancer risk greater than 1×10^{-6} or a noncancer hazard index (HI) greater than 1 (USEPA, 2002). Table 1 of the USEPA guidance (2002) identifies chemicals that are sufficiently toxic and volatile to pose a concern through vapor intrusion.

The following VOCs have been detected in at least one site groundwater sample collected during the last five years of groundwater monitoring:

- Benzene
- 1,2-Dichlorobenzene
- 1,1-Dichloroethene (1,1-DCE)
- cis-1,2-Dichloroethene (cis-1,2-DCE)
- trans-1,2-Dichloroethene (trans-1,2-DCE)
- Tetrachloroethene (PCE)
- Trichloroethene (TCE)
- Vinyl chloride (VC)

Each of these compounds are identified to be sufficiently volatile and toxic to warrant further screening of the vapor intrusion pathway in Table 1 of Subsurface Vapor Intrusion Guidance (USEPA, 2002).

Since publication of the Subsurface Vapor Intrusion Guidance (USEPA, 2002), toxicity values of several of these compounds and risk assessment calculations for the inhalation exposure pathway have been revised. The noncancer reference concentrations for chronic inhalation exposure (RfCs) and cancer unit risk factors (URFs) used for the sufficiently toxic determination in the Subsurface Vapor Intrusion Guidance are provided in Table D-1 of the document (USEPA, 2002). Current noncancer RfC and cancer Inhalation Unit Risk (IUR) toxicity values for these compounds are provided in the November 2011 Regional Screening Level Resident Air Supporting Table included in Attachment B1. Target indoor air concentrations (screening levels) based on the current compound toxicity values and USEPA Region 7 risk assessment calculations were calculated for noncancer and cancer human health risk in Tables B-1 and B-2, respectively.

Maximum vapor concentrations of the pure components were calculated in Table B-3 and compared to updated target indoor air concentration screening levels based on current toxicity values in Table B-4. As shown in Table B-4, each of the compounds listed above is found to be sufficiently toxic to warrant further evaluation.

2.2.4 Step 4 – Are Buildings Located in Site Proximity Currently or in Future Use? (Yes)

USEPA guidance establishes an area within 100 feet vertically or laterally from a volatile concentration of regulatory concern as a potential impact area for vapor intrusion (USEPA, 2002). Currently, detected groundwater concentrations are limited to the MW-1, MW-2, and MW-3 monitoring wells nests located on site; and MW-7D, and the MW-9 nest located off site. There are no buildings located on site, within 100 feet of the site boundary or within 100 feet of any well with detected groundwater impacts. The closest residence (Raftis residence) to the Site or a monitoring well with detected groundwater concentrations is located approximately 350 feet south of the Site and approximately 300 feet west of the MW-9 monitoring well nest, as shown in Figure B-1. There are also no significant subsurface utilities or conduits crossing the Site that may provide preferential pathways for soil gas to migrate off site.

Future construction of buildings on the undeveloped properties located within 100 feet of the former disposal area is not likely for the following reasons:

- Rockwell Collins has control of the property surrounding the Site, as shown in Figure B-1.
- The steep topography surrounding the Site to the northeast and south, and low areas susceptible to flooding, limit accessible area for building.
- Recent development south of the Site has been conducted along Blair's Ferry Road, where zoning is for non-residential purposes.

2.2.5 Step 5 – Identify Occupant Exposure Scenarios and Screening Levels

Although there are no current or expected future buildings located within 100 feet of the Site or a monitoring well with detected groundwater concentrations, a hypothetical residential exposure scenario will be assessed for a conservative approach to the vapor intrusion evaluation.

Table 2c of the USEPA guidance document (2002) provides target groundwater screening levels corresponding to residential target indoor air concentrations where:

- Chemical partitioning from groundwater to soil gas obeys Henry's Law.
- Soil gas to indoor air attenuation factor is 0.001.
- Both target cancer risk of 1×10^{-6} and noncancer HI of 1 are satisfied.

Updated target residential indoor air concentrations based on current compound toxicity values and USEPA Region 7 risk assessment calculations were calculated for noncancer and cancer human health risk in Tables B-1 and B-2, respectively and summarized in Table B-4.

2.2.6 Step 6 – Do Data Exceed Screening Levels? (Yes)

The maximum groundwater concentrations detected during the last five years of groundwater monitoring at the Site were compared to the USEPA 2002 target groundwater screening levels in Table B-5. As shown in Table B-5, the maximum detected groundwater concentrations exceeded the target groundwater screening levels for the following compounds:

- Benzene
- 1,1-DCE
- cis-1,2-DCE
- trans-1,2-DCE
- TCE
- VC

However, the target groundwater screening levels in Table B-5 are based on a default attenuation factor (0.001) and are not based on current compound toxicity values. Therefore, maximum soil vapor concentrations based on maximum detected groundwater concentrations were also calculated and compared to the updated target residential indoor air concentrations that were calculated in Tables B-1 and B-2. Calculation of maximum soil vapor concentrations based on overall maximum detected groundwater concentrations is shown in Table B-6. As

shown in Table B-7, the overall maximum soil vapor concentrations exceeded the target residential indoor air concentrations for the following compounds:

- Benzene
- 1,1-DCE
- trans-1,2-DCE
- PCE
- TCE
- VC

Calculation of maximum soil vapor concentrations based on maximum groundwater concentrations detected at individual monitoring wells during the last five years and comparisons with residential target indoor air concentrations are shown in Tables B-8 through B15. Where monitoring well nests are located, maximum groundwater concentrations detected in the uppermost screened interval from 2007 to present were used to calculate maximum soil vapor concentrations. For the MW-1, MW-2, MW-3, and MW-4 well nests, the uppermost monitoring well ("A" level) is screened in the alluvial aquifer. At the MW-9 well nest, the uppermost monitoring well ("B" level) is screened in the Devonian bedrock.

Due to previous alluvial aquifer groundwater delineation presented in the RI Report (MWH, 1997), monitoring wells at the off-site MW-5 through MW-9 locations were screened only in bedrock to target the depth of greatest groundwater impact. The extent of impacts in the alluvial aquifer was delineated between the former disposal area and these bedrock well locations. Because groundwater concentrations in the bedrock aquifers are expected to exceed groundwater concentrations in the alluvial aquifer at these off-site locations, use of the bedrock aquifer groundwater concentrations is expected to provide an overestimate of the actual maximum soil vapor concentrations in the vicinity of MW-5D, MW-7D, MW-8D, and MW-9B. As shown in Tables B-8 through B-15, calculated maximum soil vapor concentrations exceeded residential target indoor air concentrations for at least one compound at the following locations: MW-1A, MW-3A, and MW-9B. For each of these exceedances, the attenuation factor that would be required to reduce the maximum soil vapor concentration to the residential target indoor air concentration was calculated in the respective tables. Each calculated AF shown in Tables B-8 through B-15 is the compound-specific target indoor air concentration divided by the maximum soil vapor concentration calculated for that compound at a particular monitoring well. The calculated AFs indicate the magnitude of attenuation required between the subsurface soil vapor and indoor air required to achieve the compound-specific target indoor air concentrations; therefore, the larger the soil vapor concentration (denominator in the equation), the smaller the calculated AF. Each calculated AF was compared to a screening AF of 1E-03, which is both a conservative USEPA screening value and a conservative empirical groundwater-to-indoor air value as described in the following paragraph.

In the Subsurface Vapor Intrusion Guidance, groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet are based on a soil gas to a conservative indoor air attenuation factor of 1E-03 (USEPA, 2002). The 95th percentile of groundwater-to-indoor air attenuation factors based on 1,058 groundwater-to-indoor air

attenuation factors calculated from 266 buildings on 36 sites, as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors is also 1E-03 (USEPA, 2008). The empirical groundwater-to-indoor air attenuation factors were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentrations underlying the building.

As shown in Tables B-8 through B-15, calculated maximum soil vapor concentrations for one or more compounds in the vicinity of MW-1A, MW-3A, and MW-9B require an attenuation factor less than (more reduction in concentration than) the conservative value of 1E-03. At MW-1A, the calculated attenuation factors for PCE (5.8E-04), TCE (9.4E-05), and VC (1.1E-04) were less than 1E-03. The calculated attenuation factors for the following six compounds were less than 1E-03 at MW-3A: benzene (1.4E-04), 1,1-DCE (2.8E-04), trans 1,2-DCE (3.0E-04), TCE (2.6E-07), and VC (1.7E-07). At MW-9B, the calculated attenuation factors for TCE (3.4E-04) and VC (7.7E-06) were less than 1E-03.

2.2.7 Step 7 – Do Exceedances Warrant Further Investigation? (No)

The vapor intrusion evaluation described in the previous sections integrates use of the following conservative factors:

- Maximum groundwater concentrations detected during the past five years.
- Maximum observed groundwater temperature.
- Target cancer risk of 1E-06.
- Calculation of noncancer screening levels for a child resident.
- Division of noncancer screening levels by number of compounds with same target organs.
- Attenuation factor based on 95th percentile of empirical values.
- Groundwater concentrations from bedrock monitoring wells at MW-5D, MW-7D, MW-8D, and MW-9B, which are greater than groundwater concentrations in the overlying unconsolidated sediments in these off-site locations based on RI alluvial aquifer plume delineation.

This evaluation indicates vapor intrusion of VOCs from groundwater in the alluvial aquifer could potentially result in residential indoor air concentrations exceeding a target lifetime cancer risk of 1E-06 or noncancer hazard index of 1 in the vicinity of MW-1A and MW-3A, which are located near the former disposal area. The highest detected groundwater concentrations and, therefore, calculated maximum soil vapor concentrations are located at MW-3A. The closest residential buildings to MW-3A are the Thurness residence, which is located approximately 570 feet to the northeast, and the Raftis residence located approximately 560 feet to the southwest (Figure B-1). Monitoring well MW-1A is also located over 100 feet away from the nearest buildings. However, future residential development in the vicinity of these wells will not occur given Rockwell Collins ownership of the property in the area, existing institutional controls, steep topography near the Site, and surrounding land development patterns.

VOC concentrations detected in bedrock monitoring well MW-9B were also calculated to potentially result in residential indoor air concentrations exceeding a target lifetime cancer risk of $1E-06$ and a noncancer hazard index of 1. However, groundwater concentrations detected in bedrock monitoring well MW-9B are not representative of actual groundwater concentrations that would partition to soil vapor, because groundwater monitored at MW-9B is overlain by over 70 feet of glacial till sediments and the extent of groundwater VOCs in the alluvial aquifer has been delineated between the former disposal area and MW-9B. Therefore, the absence of deep conduits and utilities, and the presence of shallow saturated conditions and relatively fine-grained sediments above bedrock effectively prohibit vapor intrusion of VOCs exceeding target indoor air concentrations to hypothetical future structures in the vicinity of MW-9B.

P:\Word Processing\ROCKWELL COLLINS\FORMER RALSTON DISPOSAL SITE\2011-FIVE-YEAR REVIEW\LTR RPT-01-12-Response to Second 5-Year Review Comments\Attachment B-Vapor Intrusion\rev_ATTACH_x_11-11_VI Evaluation_final draft.docx

ATTACHMENT B TABLES

TABLE B-1

CALCULATION OF RESIDENTIAL INDOOR AIR SCREENING LEVELS BASED ON NONCANCER HEALTH RISK

Compound	RfC _i (mg/m ³)	THQ (unitless)	AT _{rc} (days)	ED _{rc} (years)	EF _{rc} (days/year)	ET _{rc} (hours/day)	Inhalation Noncancer Target Organ	Number of Compounds with Same Target Organ	SL _{res-c-air-nc} (µg/m ³)
Benzene	3.0E-02 (a)	1	2190	6	350	24	Blood	1	3.1E+01
1,2-Dichlorobenzene	2.0E-01 (b)	1	2190	6	350	24	None	1	2.1E+02
1,1-Dichloroethene	2.0E-01 (a)	1	2190	6	350	24	Liver	3	7.0E+01
cis-1,2-Dichloroethene	NA	1	2190	6	350	24	NA	NA	NA
trans-1,2-Dichloroethene	6.0E-02 (c)	1	2190	6	350	24	Liver	3	2.1E+01
Tetrachloroethene	2.7E-01 (d)	1	2190	6	350	24	Nervous System	1	2.8E+02
Trichloroethene	2.0E-03 (a)	1	2190	6	350	24	Heart, Thymus	1	2.1E+00
Vinyl chloride	1.0E-01 (a)	1	2190	6	350	24	Liver	3	3.5E+01

Notes:

- The noncancer screening levels are based on a resident child receptor residing in a home 350 days per year over a period of 6 years per United States Environmental Protection Agency (USEPA) Region VII guidance.
- The noncancer screening levels calculated by the equation below are divided by the number of contaminants with the same target organ per USEPA Region VII guidance.

$SL_{res-c-air-nc} = [THQ * AT_{rc} * (1000 \mu g/mg)] / [EF_{rc} * ED_{rc} * ET_{rc} * (1 \text{ day}/24 \text{ hours}) * (1/RfC_i)]$ Reference: USEPA November 2011 Regional Screening Table User's Guide.

Where:

SL_{res-c-air-nc} = Screening level for indoor inhalation pathway of a child resident based on noncancer health risk.

RfC_i = Chronic inhalation reference concentration.

THQ = Target hazard quotient.

AT_{rc} = Averaging time for child resident (70 years X 365 days/year for carcinogenic; ED x 365 days/year for noncarcinogenic).

ED_{rc} = Exposure duration for child resident.

EF_{rc} = Exposure frequency for child resident.

ET_{rc} = Inhalation exposure time for child resident.

(a) = Value obtained from the USEPA Integrated Risk Information System (IRIS).

(b) = Value obtained from USEPA *Health Effects Assessment Summary Tables* (HEAST): Annual Update, FY 1997. NCEA, Office of Research and Development and Office of Emergency and Remedial Response (USEPA, 1997), as reported in the November 2011 RSL Tapwater Supporting Table.

(c) = Value obtained from Provisional Peer Reviewed Toxicity Values (PPRTVs), as reported in the November 2011 RSL Tapwater Supporting Table, derived by the USEPA Superfund Health Risk Technical Support Center (STSC) for the USEPA Superfund program.

(d) = Value obtained from Agency for Toxic Substances and Disease Registry (ATSDR) Minimal Risk Levels (MRLs).

mg/m³ = Milligram(s) per cubic meter.

µg/m³ = Microgram(s) per cubic meter.

TABLE B-2

CALCULATION OF RESIDENTIAL INDOOR AIR SCREENING LEVELS BASED ON CANCER HUMAN HEALTH RISK

Compound	IUR ($\mu\text{g}/\text{m}^3$) ¹	TR (unitless)	AT _r (days)	ED _{rc} (years)	ED _{ra} (years)	EF _r (days/year)	ET _r (hours/day)	SL _{res-air-ca} ($\mu\text{g}/\text{m}^3$)	SL _{res-air-mu} ($\mu\text{g}/\text{m}^3$)	SL _{res-air-(ca+mu)} ($\mu\text{g}/\text{m}^3$)	SL _{res-air-ca-vc} ($\mu\text{g}/\text{m}^3$)
Benzene	7.8E-06 (a)	1.0E-06	25550	6	24	350	24	3.1E-01	NA	NA	NA
1,2-Dichlorobenzene	NC	1.0E-06	25550	6	24	350	24	NA	NA	NA	NA
1,1-Dichloroethene	NC	1.0E-06	25550	6	24	350	24	NA	NA	NA	NA
cis-1,2-Dichloroethene	NC	1.0E-06	25550	6	24	350	24	NA	NA	NA	NA
trans-1,2-Dichloroethene	NC	1.0E-06	25550	6	24	350	24	NA	NA	NA	NA
Tetrachloroethene	5.9E-06 (b)	1.0E-06	25550	6	24	350	24	4.1E-01	NA	NA	NA
Trichloroethene	4.1E-06 (a)	1.0E-06	25550	6	24	350	24	NA	NA	NA	NA
	1.0E-06 (c)	1.0E-06	25550	6	24	350	24	NA	9.6E-01	4.3E-01	NA
	3.1E-06 (d)	1.0E-06	25550	6	24	350	24	7.8E-01	NA	NA	NA
Vinyl chloride	4.4E-06 (a)	1.0E-06	25550	6	24	350	24	NA	NA	NA	1.6E-01

Notes:

1. Benzene and tetrachloroethene are considered carcinogenic without a mutagenic mode of action.

The cancer indoor air screening levels for these compounds are based on an age-adjusted resident receptor exposed to indoor air

350 days per year over a period of 6 years as a child and 24 years as an adult per United States Environmental Protection Agency (USEPA) Region VII guidance.

2. Vinyl chloride and trichloroethene are considered a carcinogen with a mutagenic mode of action. The mutagenic cancer screening levels are calculated for compounds considered carcinogenic via a mutagenic mode of action and are based on a resident receptor exposed to indoor air 350 days per year with Age Dependent Adjustment Factors over a period of 6 years as a child and 24 years as an adult per Supplemental Guidance for Assessing Susceptibility from Early-Life Exposure to Carcinogens (USEPA, 2005). The mutagen vinyl chloride has a unique set of screening level equations as shown in the USEPA November 2011 Regional Screening Level User's Guide.

$SL_{res-air-ca} = [TR \cdot AT] / [EF_r \cdot (ED_{rc} + ED_{ra}) \cdot ET_r \cdot (1 \text{ day}/24 \text{ hours}) \cdot IUR]$ Reference: USEPA November 2011 Regional Screening Table User's Guide.

$SL_{res-air-mu} = [TR \cdot AT] / [EF_r \cdot ET_r \cdot (1 \text{ day}/24 \text{ hours}) \cdot ((ED_{0-2} \cdot IUR \cdot 10) + (ED_{2-6} \cdot IUR \cdot 3) + (ED_{6-16} \cdot IUR \cdot 3) + (ED_{16-30} \cdot IUR \cdot 1))]$ Reference: USEPA November 2011 Regional Screening Table User's Guide.

$SL_{res-air-(ca+mu)} = [1] / [(1/SL_{res-air-ca}) + (1/SL_{res-air-mu})]$ Reference: USEPA November 2011 Regional Screening Table User's Guide.

$SL_{res-air-ca-vc} = [TR] / [IUR + ((IUR \cdot EF_r \cdot (ED_{rc} + ED_{ra}) \cdot ET_r \cdot (1 \text{ day}/24 \text{ hours})) / AT)]$ Reference: USEPA November 2011 Regional Screening Table User's Guide.

Where:

SL_{res-air-ca} = Screening level for indoor inhalation pathway of a resident based on cancer health risk without mutagenic mode of action.

SL_{res-air-ca-vc} = Screening level for indoor inhalation pathway of a resident based on cancer health risk for vinyl chloride.

IUR = Inhalation unit risk.

TR = Target cancer risk.

AT_r = Averaging time for resident (70 years X 365 days/year for carcinogenic; ED x 365 days/year for noncarcinogenic).

ED_{ra} = Exposure duration for adult resident.

ED_{rc} = Exposure duration for child resident.

ED₀₋₂ = Exposure duration for resident 0-2 years old.

ED₂₋₆ = Exposure duration for resident 2-6 years old.

ED₆₋₁₆ = Exposure duration for resident 6-16 years old.

ED₁₆₋₃₀ = Exposure duration for resident 16-30 years old.

EF_r = Exposure frequency for resident.

ET_r = Inhalation exposure time for resident.

(a) = Value obtained from the USEPA Integrated Risk Information System (IRIS).

(b) = Value obtained from California Environmental Protection Agency (OEHHA) Office of Environmental Health Hazard Assessment's Chronic Reference

Exposure Levels (RELS) from December 18, 2008 and the Cancer Potency Values from July 21, 2009, as reported in the November 2011 RSL Resident Air Supporting Table.

(c) = Value (kidney mutagenic endpoint) obtained from the USEPA November 2011 Regional Screening Table Frequently Asked Questions.

(d) = Value (non-Hodgkin's lymphoma/liver cancer endpoint) obtained from the USEPA November 2011 Regional Screening Table Frequently Asked Questions.

$\mu\text{g}/\text{m}^3$ = Microgram(s) per cubic meter.

NA = Not applicable.

NC = Not a considered a carcinogen.

TABLE B-3

CALCULATION OF MAXIMUM PURE COMPONENT VAPOR CONCENTRATION

Compound	Aqueous Solubility at 25 °C (S) ^a (mg/L)	Dimensionless Henry's Law Constant at 25 °C (H') ^a (unitless)	Maximum Pure Component Vapor Concentration at 25 °C (C _{max, vp}) ^b (µg/m ³)
Benzene	1790	0.2269011	4.06E+08
1,2-Dichlorobenzene	156	0.0784955	1.22E+07
1,1-Dichloroethene	2420	1.0670482	2.58E+09
cis-1,2-Dichloroethene	6410	0.1668029	1.07E+09
trans-1,2-Dichloroethene	4520	0.1668029	7.54E+08
Tetrachloroethene	206	0.7236304	1.49E+08
Trichloroethene	1280	0.4026983	5.15E+08
Vinyl chloride	8800	1.1365495	1.00E+10

Notes:

^a = United States Environmental Protection Agency Estimation Program Interface Suite TM (EPI Suite TM).

^b = C_{max, vp} = S x H' x (1000µg/1mg) x (1L/1000mL) x (1mL/1cm³) x (100cm/1m)³

Reference: Appendix D of Subsurface Vapor Intrusion Guidance (USEPA, 2002).

mg/L = Milligram(s) per liter.

µg/m³ = Microgram(s) per cubic meter.

TABLE B4

DETERMINATION OF SUFFICIENT TOXICITY FOR CONCERN THROUGH THE
VAPOR INTRUSION PATHWAY

Compound	$C_{\max, vp}^a$ ($\mu\text{g}/\text{m}^3$)	$SL_{\text{res-c-air-nc}}^b$ ($\mu\text{g}/\text{m}^3$)	$SL_{\text{res-air-ca}}^c$ ($\mu\text{g}/\text{m}^3$)	$SL_{\text{res-air-mu}}^d$ ($\mu\text{g}/\text{m}^3$)	$SL_{\text{res-air-(ca+mu)}}^e$ ($\mu\text{g}/\text{m}^3$)	$SL_{\text{res-air-ca-vc}}^f$ ($\mu\text{g}/\text{m}^3$)	Most Conservative Screening Level ($\mu\text{g}/\text{m}^3$)	Sufficiently Toxic ^g ?
Benzene	4.06E+08	3.1E+01	3.1E-01	NA	NA	NA	3.1E-01	Yes
1,2-Dichlorobenzene	1.22E+07	2.1E+02	NA	NA	NA	NA	2.1E+02	Yes
1,1-Dichloroethene	2.58E+09	7.0E+01	NA	NA	NA	NA	7.0E+01	Yes
cis-1,2-Dichloroethene	1.07E+09	NA	NA	NA	NA	NA	NA	Yes
trans-1,2-Dichloroethene	7.54E+08	2.1E+01	NA	NA	NA	NA	2.1E+01	Yes
Tetrachloroethene	1.49E+08	2.8E+02	4.1E-01	NA	NA	NA	4.1E-01	Yes
Trichloroethene	5.15E+08	2.1E+00	7.8E-01	9.6E-01	4.3E-01	NA	4.3E-01	Yes
Vinyl chloride	1.00E+10	3.5E+01	NA	NA	NA	1.6E-01	1.6E-01	Yes

Notes:

- ^a = Maximum Pure Component Vapor Concentration at 25 °C calculated in Table B-3.
- ^b = Screening level for indoor inhalation pathway of a child resident based on noncancer health risk calculated in Table B-1.
- ^c = Screening level for indoor inhalation pathway of a resident based on cancer health risk without mutagenic mode of action calculated in Table B-2.
- ^d = Screening level for indoor inhalation pathway of a resident based on cancer health risk with a mutagenic mode of action calculated in Table B-2.
- ^e = Screening level for indoor inhalation pathway of a resident based on cancer health risk with both a mutagenic and non-mutagenic mode of action calculated in Table B-2.
- ^f = Screening level for indoor inhalation pathway of a resident based on cancer health risk for vinyl chloride calculated in Table B-2.
- ^g = A contaminant was determined to be sufficiently toxic to pose an unacceptable inhalation risk (incremental lifetime cancer risk greater than 1E-06 or noncancer hazard index greater than 1) if the calculated $C_{\max, vp}$ was greater than one or more of the calculated indoor air screening levels.

$\mu\text{g}/\text{m}^3$ = Microgram(s) per cubic meter.

NA = Not applicable.

TABLE B-5

COMPARISON OF MAXIMUM DETECTED GROUNDWATER CONCENTRATIONS TO USEPA 2002 GROUNDWATER SCREENING LEVELS

Compound	Maximum Groundwater Concentration (C_w) ^a ($\mu\text{g/L}$)	Target Groundwater Concentration ^b (C_{gw}) ($\mu\text{g/L}$)	$C_w > C_{gw}$
Benzene	14.9	5	Yes
1,2-Dichlorobenzene	4.19	2600	No
1,1-Dichloroethene	321	190	Yes
cis-1,2-Dichloroethene	30800	210	Yes
trans-1,2-Dichloroethene	261	180	Yes
Tetrachloroethene	1.59	5	No
Trichloroethene	6140	5	Yes
Vinyl chloride	1100	2	Yes

Notes:

^a Highest concentration detected in site monitoring wells during last five years of groundwater monitoring.

^b Target groundwater concentration corresponding to target indoor air concentration where partitioning across the water table obeys Henry's Law, the soil gas to indoor air attenuation factor is 0.001, and the prescribed risk levels are target cancer risk = 1E-06 and Hazard Index=1.

Reference: Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (United States Environmental Protection Agency [USEPA], 2002).

$\mu\text{g/L}$ = Microgram(s) per liter.

TABLE B-6

CALCULATION OF SOIL VAPOR CONCENTRATIONS AT WATER TABLE FROM GROUNDWATER SOURCE

Compound	Maximum Groundwater Concentration (C _W) ^a (µg/L)	System Temperature (T _S) ^b (K)	Critical Temperature (T _C) ^c (K)	Normal Boiling Point (T _B) ^c (K)	T _B /T _C	Constant (n) ^c (unitless)	Enthalpy of Vaporization at Normal Boiling Point ^c (cal/mol)	Enthalpy of Vaporization at T _C (ΔH _{v,T_S)^c (cal/mol)}	Henry's Law Constant Reference Temperature (T _R) ^c (K)	Henry's Law Constant at T _R (H _R) (atm·m ³ /mol)	Gas Constant R _c ^c (cal/mol·K)	Gas Constant R (atm·m ³ /mol·K)	Dimensionless Henry's Law Constant at T _S (H' _{TS}) (unitless)	Maximum Source Soil Vapor Concentration (C _{source}) ^d (µg/m ³)
Benzene	14.9	288.25	562.16	353.24	0.63	0.35	7342	8070	298.15	5.56E-03	1.9872	8.205E-05	1.47E-01	2.2E+03
1,2-Dichlorobenzene	4.19	288.25	705.00	180.42	0.26	0.30	9700	9053	298.15	1.90E-03	1.9872	8.205E-05	4.75E-02	2.0E+02
1,1-Dichloroethene	321	288.25	576.05	304.75	0.53	0.30	6247	6359	298.15	2.61E-02	1.9872	8.205E-05	7.63E-01	2.5E+05
cis-1,2-Dichloroethene	30800	288.25	544.00	333.65	0.61	0.34	7192	7683	298.15	4.07E-03	1.9872	8.205E-05	1.10E-01	3.4E+06
trans-1,2-Dichloroethene	261	288.25	516.50	320.85	0.62	0.34	6717	7082	298.15	9.39E-03	1.9872	8.205E-05	2.63E-01	6.9E+04
Tetrachloroethene	1.59	288.25	620.20	394.40	0.64	0.35	8288	9501	298.15	1.84E-02	1.9872	8.205E-05	4.49E-01	7.1E+02
Trichloroethene	6140	288.25	544.20	360.36	0.66	0.37	7505	8494	298.15	1.03E-02	1.9872	8.205E-05	2.66E-01	1.6E+06
Vinyl chloride	1100	288.25	432.00	259.25	0.60	0.33	5250	4943	298.15	2.71E-02	1.9872	8.205E-05	8.60E-01	9.5E+05

Notes:

^a Highest concentration detected in site monitoring wells during last five years of groundwater monitoring.

^b Highest groundwater temperature recorded during purging of site monitoring wells (15.1 °C/59.18 °F).

^c Value provided in Appendix C of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

^d Vapor concentration at the source of contamination. C_{source} for groundwater contamination is estimated assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

$C_{source} = H'_{TS} \cdot C_W \cdot (1L/1000mL) \times (1mL/1cm^3) \times (100cm/1m)^3$ Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

$H'_{TS} = \left[\exp(-\Delta H_{v,TS}/R_C \cdot (1/T_S - 1/T_R)) \right] \cdot H_R / R \cdot T_S$ Reference: Equation 3 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

$\Delta H_{v,TS} = \Delta H_{v,b} \cdot \left[(1 - T_S/T_C) / (1 - T_B/T_C) \right]^n$ Reference: Equation 4 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

Where:

H'_{TS} = Henry's law constant at the system (groundwater) temperature.

C_W = Groundwater concentration.

ΔH_{v,TS} = Enthalpy of vaporization at the system temperature.

T_S = System temperature.

T_R = Henry's law constant reference temperature.

H_R = Henry's law constant at the reference temperature.

R_C = Gas constant.

R = Gas constant.

ΔH_{v,b} = Enthalpy of vaporization at the normal boiling point.

T_C = Critical temperature.

T_B = Normal boiling point.

n = Constant as a function of the ratio T_B/T_C as indicated in Table 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

µg/L = Microgram(s) per liter.

µg/m³ = Microgram(s) per cubic meter.

K = Kelvin.

Cal/mol = Calories per mole.

atm = Atmosphere(s).

mol = Mole(s).

m³ = Cubic meter(s).

TABLE B-7

COMPARISON OF CALCULATED SOIL VAPOR CONCENTRATIONS TO RESIDENTIAL INDOOR AIR SCREENING LEVELS

Compound	$C_{\text{source}}^{\text{a}}$ ($\mu\text{g}/\text{m}^3$)	SL ^b ($\mu\text{g}/\text{m}^3$)	$C_{\text{source}} > \text{SL}$	AF to Achieve SL
Benzene	2.2E+03	3.1E-01	Yes	1.4E-04
1,2-Dichlorobenzene	2.0E+02	2.1E+02	No	NA
1,1-Dichloroethene	2.5E+05	7.0E+01	Yes	2.8E-04
cis-1,2-Dichloroethene	3.4E+06	NA	NA	NA
trans-1,2-Dichloroethene	6.9E+04	2.1E+01	Yes	3.0E-04
Tetrachloroethene	7.1E+02	4.1E-01	Yes	5.8E-04
Trichloroethene	1.6E+06	4.3E-01	Yes	2.6E-07
Vinyl chloride	9.5E+05	1.6E-01	Yes	1.7E-07

Notes:

^a = Maximum soil vapor concentrations from maximum groundwater concentrations at system ter calculated in Table B-6.

^b = Most conservative screening level determined in Table B-4.

$$\text{AF} = \text{SL}/C_{\text{source}}$$

Where:

AF = Vapor intrusion attenuation factor.

C_{source} = Vapor concentration at the groundwater source of contamination.

SL = Screening level.

$\mu\text{g}/\text{m}^3$ = Microgram(s) per cubic meter.

NA = Not applicable.

TABLE B-8

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-1A

Compound	MW-1A Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration(C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF>1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	ND	NA	7.0E+01	No	NA	NA
cis-1,2-Dichloroethene	20.5	2.26E+03	NA	NA	NA	NA
trans-1,2-Dichloroethene	ND	NA	2.1E+01	No	NA	NA
Tetrachloroethene	1.59	7.13E+02	4.1E-01	Yes	5.8E-04	No
Trichloroethene	17.2	4.58E+03	4.3E-01	Yes	9.4E-05	No
Vinyl chloride	1.75	1.51E+03	1.6E-01	Yes	1.1E-04	No

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law. Calculated as shown in Table B-6.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

$C_{source} = H'_{TS} * C_w$ Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

TABLE B-9

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-2A

Compound	MW-2A Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration (C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF > 1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	ND	NA	7.0E+01	No	NA	NA
cis-1,2-Dichloroethene	1.35	1.49E-01	NA	NA	NA	NA
trans-1,2-Dichloroethene	ND	NA	2.1E+01	No	NA	NA
Tetrachloroethene	ND	NA	4.1E-01	No	NA	NA
Trichloroethene	ND	NA	4.3E-01	No	NA	NA
Vinyl chloride	ND	NA	1.6E-01	No	NA	NA

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law. Calculated as shown in Table B-6.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

$C_{source} = H'_{TS} * C_w$ **Reference:** Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

TABLE B-10

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-3A

Compound	MW-3A Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration (C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF > 1E-03 ^{e,f}
Benzene	14.9	2.19E+03	3.1E-01	Yes	1.4E-04	No
1,2-Dichlorobenzene	4.19	1.99E+02	2.1E+02	No	1.0E+00	Yes
1,1-Dichloroethene	321	2.45E+05	7.0E+01	Yes	2.8E-04	No
cis-1,2-Dichloroethene	30800	3.40E+06	NA	NA	NA	NA
trans-1,2-Dichloroethene	261	6.87E+04	2.1E+01	Yes	3.0E-04	No
Tetrachloroethene	ND	NA	4.1E-01	Yes	NA	NA
Trichloroethene	6140	1.63E+06	4.3E-01	Yes	2.6E-07	No
Vinyl chloride	1100	9.46E+05	1.6E-01	Yes	1.7E-07	No

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

C_{source} = H_{TS} * C_w Calculated as shown in Table B-6. Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

TABLE B-11

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-4A

Compound	MW-4A Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration (C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF > 1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	ND	NA	7.0E+01	No	NA	NA
cis-1,2-Dichloroethene	ND	NA	NA	NA	NA	NA
trans-1,2-Dichloroethene	ND	NA	2.1E+01	No	NA	NA
Tetrachloroethene	ND	NA	4.1E-01	No	NA	NA
Trichloroethene	ND	NA	4.3E-01	No	NA	NA
Vinyl chloride	ND	NA	1.6E-01	No	NA	NA

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

C_{source} = H_{TS}*C_w Calculated as shown in Table B-6. Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

TABLE B-12

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-5D

Compound	MW-5D Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration (C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF > 1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	ND	NA	7.0E+01	No	NA	NA
cis-1,2-Dichloroethene	ND	NA	NA	NA	NA	NA
trans-1,2-Dichloroethene	ND	NA	2.1E+01	No	NA	NA
Tetrachloroethene	ND	NA	4.1E-01	No	NA	NA
Trichloroethene	ND	NA	4.3E-01	No	NA	NA
Vinyl chloride	ND	NA	1.6E-01	No	NA	NA

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

C_{source} = H_{ts}*C_w Calculated as shown in Table B-6. Reference: Equation 2 of User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

TABLE B-13

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-7D

Compound	MW-7D Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration (C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF > 1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	ND	NA	7.0E+01	No	NA	NA
cis-1,2-Dichloroethene	1.56	1.72E+02	NA	NA	NA	NA
trans-1,2-Dichloroethene	ND	NA	2.1E+01	No	NA	NA
Tetrachloroethene	ND	NA	4.1E-01	No	NA	NA
Trichloroethene	ND	NA	4.3E-01	No	NA	NA
Vinyl chloride	ND	NA	1.6E-01	No	NA	NA

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

C_{source} = H_{Ts}*C_w Calculated as shown in Table B-6. Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

TABLE B-14

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-8D

Compound	MW-8D Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration(C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF>1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	ND	NA	7.0E+01	No	NA	NA
cis-1,2-Dichloroethene	ND	NA	NA	NA	NA	NA
trans-1,2-Dichloroethene	ND	NA	2.1E+01	No	NA	NA
Tetrachloroethene	ND	NA	4.1E-01	No	NA	NA
Trichloroethene	ND	NA	4.3E-01	No	NA	NA
Vinyl chloride	ND	NA	1.6E-01	No	NA	NA

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

C_{source} = H_{TS}*C_w Calculated as shown in Table B-6. Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration/C_{source}.

AF = Vapor intrusion attenuation factor.

µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

TABLE B-15

EVALUATION OF VAPOR INTRUSION POTENTIAL OF COMPOUNDS FROM GROUNDWATER TO INDOOR AIR IN THE VICINITY OF MW-9B

Compound	MW-9B Maximum Groundwater Concentration (C _w) ^a (µg/L)	Maximum Source Soil Vapor Concentration (C _{source}) ^b (µg/m ³)	Target Indoor Air Concentration ^c (µg/m ³)	C _{source} > Target Indoor Air Concentration	AF to Achieve Target Indoor Air Concentration ^d	AF > 1E-03 ^{e,f}
Benzene	ND	NA	3.1E-01	No	NA	NA
1,2-Dichlorobenzene	ND	NA	2.1E+02	No	NA	NA
1,1-Dichloroethene	9.14	6.98E+03	7.0E+01	Yes	1.0E-02	Yes
cis-1,2-Dichloroethene	981	1.08E+05	NA	NA	NA	NA
trans-1,2-Dichloroethene	23.46	6.18E+03	2.1E+01	Yes	3.4E-03	Yes
Tetrachloroethene	ND	NA	4.1E-01	No	NA	NA
Trichloroethene	4.84	1.29E+03	4.3E-01	Yes	3.4E-04	No
Vinyl chloride	24.2	2.08E+04	1.6E-01	Yes	7.7E-06	No

Notes:

1. The greater the AF value, the lesser the degree of attenuation (reduction in concentration) from the subsurface to indoor air. For example, an AF calculated in this table greater than 1E-03 indicates less reduction in concentration from soil vapor to indoor air is required to meet the target indoor concentration at the site than is typically observed from soil vapor based on a groundwater source to indoor air in the USEPA vapor intrusion database.

^a Highest concentration detected in the site monitoring well during last five years of groundwater monitoring.

^b Maximum soil vapor concentration resulting from the maximum detected groundwater concentration assuming the vapor and aqueous phases are in local equilibrium according to Henry's Law.

^c Most conservative (lowest) value of the noncancer and cancer screening levels calculated for the compound in Tables B-1 and B-2.

^d The AF is the ratio of the indoor air concentration arising from vapor intrusion to the subsurface vapor concentration at a point or depth of interest in the vapor intrusion pathway. The AF indicates the degree of reduction in soil vapor concentration of a compound entering a building through vapor intrusion required to meet the target indoor air concentration.

^e Groundwater screening levels based on compounds partitioning from across the water table to soil gas according to Henry's Law in Table 2C: Question 4 Generic Screening Levels and Summary Sheet in Subsurface Vapor Intrusion Guidance (USEPA, 2002) uses a soil gas to indoor air attenuation factor of 1E-03.

^f 95th percentile of groundwater-to-indoor air AFs based on 1,058 groundwater-to-indoor air AFs calculated from 266 buildings on 36 sites as described in USEPA's Vapor Intrusion Database: Preliminary Evaluation of Attenuation Factors (USEPA, 2008). The empirical groundwater-to-indoor air AFs were calculated by dividing measured indoor air concentrations by the soil vapor concentrations calculated from the estimated groundwater concentration underlying the building. The soil vapor concentrations were estimated by multiplying the estimated groundwater concentration by the compound's dimensionless Henry's law constant, as was done to calculate C_{source} in this table.

C_{source} = H_{TS} * C_w Calculated as shown in Table B-6. Reference: Equation 2 of *User's Guide for Evaluating Subsurface Vapor Intrusion into Buildings* (USEPA, 2004).

AF = Target Indoor Air Concentration / C_{source}.

AF = Vapor intrusion attenuation factor.


µg/m³ = Microgram(s) per cubic meter.

µg/L = Microgram(s) per liter.

NA = Not applicable.

ND = Not detected.

ATTACHMENT B FIGURE

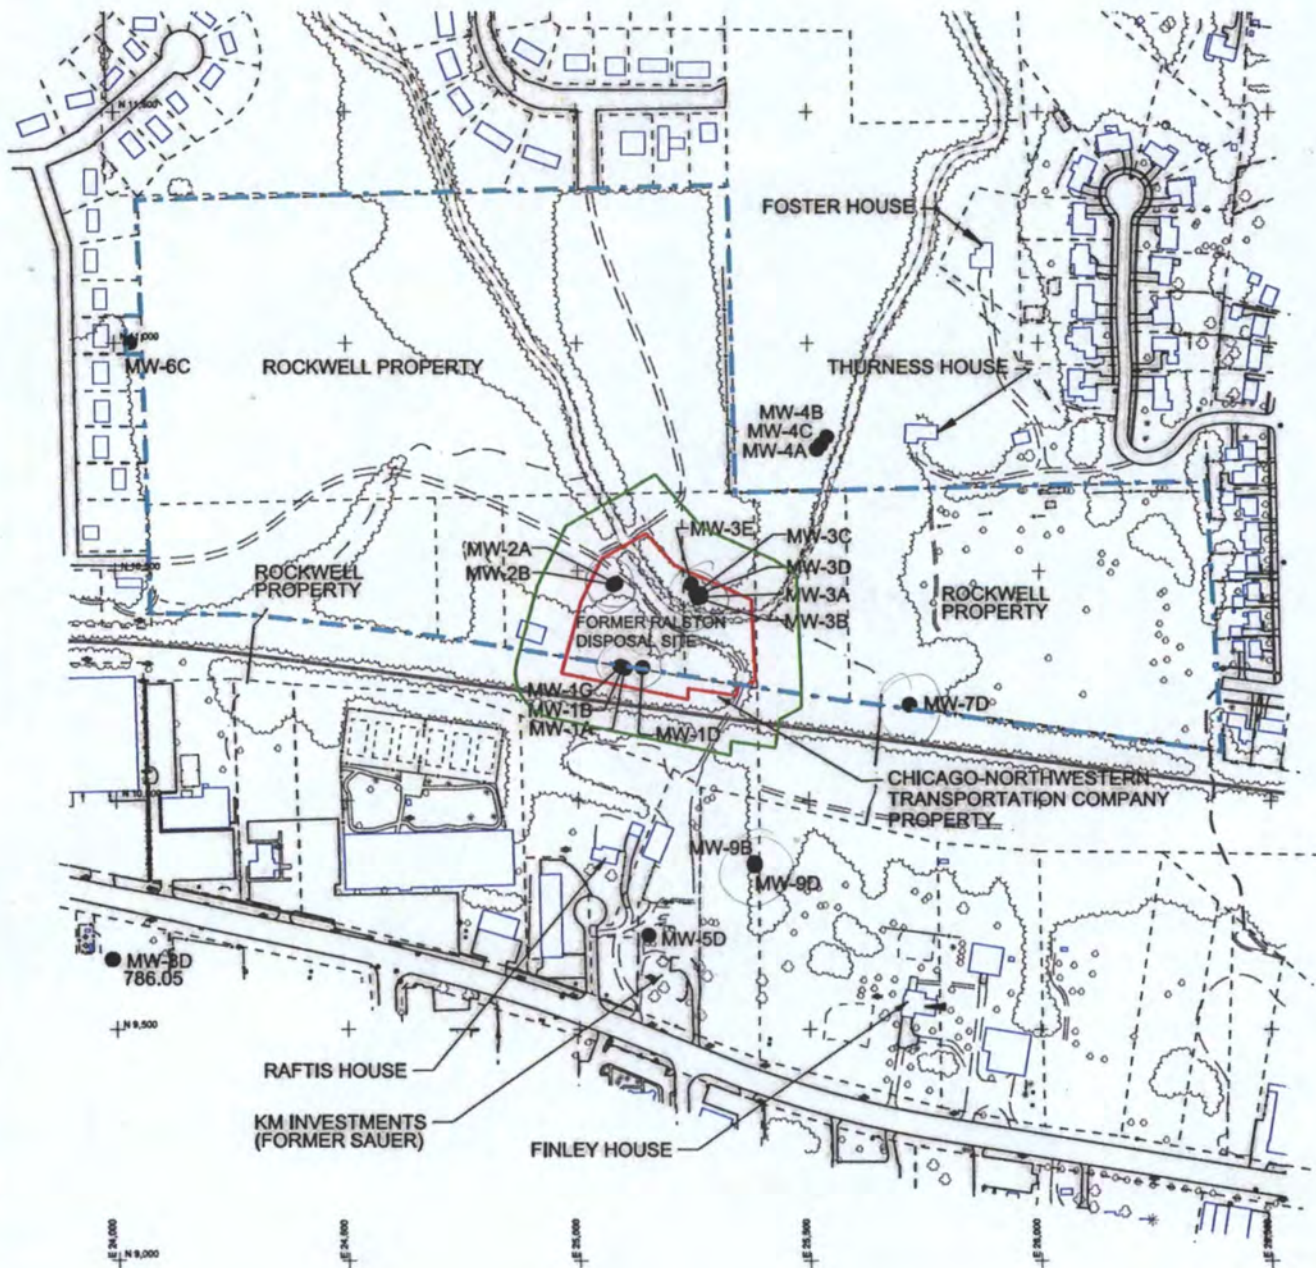


LEGEND:

- MONITORING WELL
- - - - - PROPERTY CONTROLLED BY ROCKWELL COLLINS, INC.
- SITE BOUNDARY OF FORMAL DISPOSAL AREA
- 100-FOOT PERIMETER SURROUNDING SITE



N:\work\1402\projects\CAD\rockwell\Cedar Rapids\Ralston\SB&PO-2011.dgn

DESIGNED BY	KARIN WILHELM
DRAWN BY	MORA DAY
CHECKED BY	STEVE VARSA
APPROVED BY	
PROJECT MANAGER	STEVE VARSA
CLIENT APPROVAL	
CLIENT REFERENCE NO.	



PROJECT LOCATION	DES MOINES, IOWA
PROJECT	ROCKWELL COLLINS, INC CEDAR RAPIDS, IOWA
TITLE	SITE BOUNDARY AND PROPERTY OWNERSHIP




FIGURE
B-1

ATTACHMENT B1

Toxicity and Chemical-specific Information										Contaminant		Carcinogenic Target Risk [TR] = 1E-06				Noncancer Hazard Index [HI] = 1				Protection of				
SFO	k _e	IUR	k _e	R/D ₅₀	k _e	RI/C ₁	k _e	v	muta-	Analyte	CAS No.	Ingestion SL	Dermal SL	Inhalation SL	Carcinogenic SL	Ingestion SL	Dermal SL	Inhalation SL	Noncarcinogenic SL	MCL	Risk-based SSL	MCL-based SSL		
(mg/kg-day) ⁻¹	(ug/m ³) ⁻¹	(ug/m ³) ⁻¹	(mg/kg-day)	(mg/m ³)	(mg/m ³)	(mg/m ³)	(mg/m ³)					TR=1.0E-6 (ug/L)	TR=1.0E-6 (ug/L)	TR=1.0E-6 (ug/L)	TR=1.0E-6 (ug/L)	HQ=1 (ug/L)	HQ=1 (ug/L)	HQ=1 (ug/L)	HI=1 (ug/L)	(ug/L)	(mg/kg)	(mg/kg)		
8.0E-01	P	6.0E-03	P	2.0E-04	P	2.0E-04	I	V	M	Dibromo-3-chloropropane, 1,2-	96-12-8	2.7E-02	1.6E-01	3.2E-04	3.2E-04	3.1E+00	1.7E+01	4.2E-01	3.6E-01	2.0E-01	1.4E-07	8.6E-05		
8.4E-02	I	2.7E-05	C	2.0E-02	I					Dibromobenzene, 1,4- Dibromochloromethane	106-37-6 124-48-1	8.0E-01	1.2E+01	1.8E-01	1.5E-01	1.6E+02	2.6E+02	3.1E+02	4.8E+03	8.0E+01(F)	9.3E-02	3.9E-05		
2.0E+00	I	6.0E-04	I	9.0E-03	I	9.0E-03	I	V		Dibromoethane, 1,2- Dibromomethane (Methylene Bromide) Dibutyl Phthalate	106-93-4 74-95-3 84-74-2	3.4E-02	6.1E-01	8.1E-03	6.5E-03	1.4E+02	2.5E+03	1.9E+01	1.6E+01	5.0E-02	1.8E-06	1.4E-05		
				3.0E-04	P					Dibutyltin Compounds	NA					4.7E+00					4.7E+00			
		4.2E-03	P	3.0E-02	I					Dicamba Dichloro-2-butene, 1,4-	1918-00-9 764-41-0			1.2E-03	1.2E-03	4.7E+02	7.2E+03				1.1E-01	5.4E-07		
		4.2E-03	P							Dichloro-2-butene, cis-1,4- Dichloro-2-butene, trans-1,4- Dichloroacetic Acid	1476-11-5 110-57-6 79-43-6			1.2E-03	1.2E-03	1.3E+00	8.2E+01	1.3E+00	6.3E+01	3.8E+03	6.2E+01	6.0E+01	5.4E-07	
5.0E-02	I			4.0E-03	I					Dichlorobenzene, 1,2- Dichlorobenzene, 1,4- Dichlorobenzidine, 3,3'	95-50-1 106-46-7 91-94-1	1.2E+01	1.8E+01	4.4E-01	4.2E-01	1.4E+03	2.1E+03	4.2E+02	2.8E+02	4.7E+02	6.0E+02	2.7E-01	5.8E-01	
5.4E-03	C	1.1E-05	C	7.0E-02	A	8.0E-01	I	V		Dichlorobenzophenone, 4,4'- Dichlorodifluoromethane Dichloroethane, 1,1-	90-98-2 75-71-8 75-34-3	1.2E+01	1.6E+02	3.0E+00	2.4E+00	1.4E+02	3.1E+03	2.7E+04	2.1E+02	1.4E+02		8.5E-01	3.0E-01	
5.7E-03	C	1.6E-06	C	2.0E-01	P					Dichloroethane, 1,2- Dichloroethylene, 1,1- Dichloroethylene, 1,2- (Mixed Isomers)	107-06-7 75-35-4 540-59-0	7.4E-01	1.6E+01	1.9E-01	1.5E-01	9.4E+01	1.9E+03	1.5E+01	1.3E+01	5.0E+00	7.0E+00	4.2E-05	1.4E-03	
9.1E-02	I	2.6E-05	I	6.0E-03	X	7.0E-03	P	V		Dichloroethylene, 1,2-cis- Dichloroethylene, 1,2-trans- Dichlorophenol, 2,4-	156-59-2 156-60-5 120-83-2					3.1E+01	2.5E+02	2.8E+01	8.6E+01	1.0E+02	7.0E+01	8.2E-03	2.1E-02	
				2.0E-02	I	6.0E-02	P	V		Dichlorophenoxy Acetic Acid, 2,4- Dichlorophenoxybutyric Acid, 4-(2,4- Dichloropropene, 1,2-	94-75-7 94-82-6 78-87-5	1.9E+00	2.0E+01	4.9E-01	3.8E-01	1.6E+02	9.6E+02	1.3E+02	3.4E+02	8.3E+00	8.3E+00	7.0E+01	3.5E-02	1.8E-02
3.6E-02	C	1.0E-05	C	9.0E-02	A	4.0E-03	I	V		Dichloropropane, 1,3- Dichloropropanol, 2,3- Dichloropropene, 1,3-	142-28-9 616-73-9 542-75-6	6.7E-01	6.7E+00	1.2E+00	4.1E-01	3.1E+02	3.3E+03			2.9E+02	9.9E+02	5.0E+00	1.3E-04	1.7E-03
1.0E-01	I	4.0E-06	I	3.0E-02	I	2.0E-02	I	V		Dichloros Dicyclopentadiene Dieldrin	62-73-7 77-73-6 60-57-1	2.3E-01	1.2E+01	2.3E-01	7.8E+00	4.7E+02	4.7E+03	4.2E+01	7.7E+00	3.8E+01	7.0E+00	7.0E-05	4.3E-02	6.1E-05
2.9E-01	I	8.3E-05	C	5.0E-04	I	5.0E-04	I	V		Diesel Engine Exhaust Diethanolamine Diethyl Phthalate	NA 111-42-2 84-66-2	4.2E-03	2.3E-03	1.5E-03		1.3E+04	1.4E+05		1.1E+04			4.7E+00		
1.6E+01	I	4.6E-03	I	5.0E-05	I					Diethylene Glycol Monoethyl Ether Diethylene Glycol Monoethyl Ether Diethylformamide	112-34-5 111-90-0 617-84-5					4.7E+02	6.1E+04	9.4E+02	5.5E+05	1.6E+01	1.6E+01	1.0E-01	1.9E-01	
3.5E+02	C	1.0E-01	C							Diethylstilbestrol Difenoquat Diflubenzuron	56-53-1 43221-48-6 35367-38-5	1.9E-04	5.6E-05		4.3E-05	1.3E+03	5.2E+05	3.1E+02	7.4E+02	2.2E+02	1.2E+03	2.2E+02	2.4E-05	2.5E-01
4.4E-02	C	1.3E-05	C							Difluoroethane, 1,1- Dihydrosafrole Diisopropyl Ether	75-37-6 94-58-6 108-20-3	1.5E+00			1.5E+00			1.5E+03	1.5E+03	8.3E+04	8.3E+04	2.8E+01	1.9E-03	
				7.0E-01	P					Diisopropyl Methylphosphonate Dimethylpln Dimethoate	1445-75-6 55290-64-7 60-51-5					1.3E+03	9.0E+04	3.1E+02	1.7E+05	3.1E+00	1.2E+03	3.1E+02	3.5E-01	
1.4E-02	H			8.0E-02	I					Dimethoxybenzidine, 3,3'- Dimethyl methylphosphonate Dimethylamino azobenzene [p-]	119-90-4 756-79-6 60-11-7	4.8E+00	1.6E+02		4.7E+00	9.4E+02	5.7E+05		9.4E+02			5.7E-03	8.3E-03	
1.7E-03	P			6.0E-02	P					Dimethylamine HCl, 2,4- Dimethylaniline, 2,4- Dimethylaniline, N,N-	21436-96-4 95-68-1 121-69-7	1.2E-01	2.1E+00		1.1E-01	3.1E+01	5.7E+02	3.1E+01	2.2E+02	3.0E+01	2.7E+01	6.2E-05	1.8E-04	
4.6E+00	C	1.3E-03	C							Dimethylbenzidine, 3,3'- Dimethylformamide Dimethylhydrazine, 1,1-	119-93-7 68-12-2 57-14-7	6.1E-03	7.2E-02		5.6E-03	1.6E+03	1.2E+06	1.6E+00	1.4E+03	1.6E+03	1.6E+00	3.7E-05	3.2E-01	
5.8E-01	H			2.0E-03	X					Dimethylhydrazine, 1,2- Dimethylphenol, 2,4- Dimethylphenol, 2,6-	540-73-8 105-67-9 576-26-1	1.2E-04			1.2E-04	3.1E+02	2.7E+03	9.4E+00	6.0E+01	2.7E+02	8.1E+00	2.8E-08	3.2E-01	
2.0E-01	P			2.0E-03	I					Dimethylphenol, 3,4- Dimethylterephthalate Dimethylvinylchloride	95-65-8 120-61-6 513-37-1				1.5E+00	1.6E-01	1.2E+02	1.6E+03	1.9E+04	1.4E+03	1.4E+03	1.6E-02	3.8E-01	
1.1E+01	P			1.0E-01	P	3.0E-02	I			Dinitro-o-cresol, 4,6- Dinitro-o-cyclohexyl Phenol, 4,6-	534-57-1 131-89-5					1.3E+00	1.9E+01	3.1E+01	3.8E+01	1.2E+00	1.7E+01	2.0E-03	5.7E-01	

Regional Screening Level (RSL) Soil to Groundwater Supporting Table November 2011

Toxicity and Chemical Specific Information										Contaminant		Carcinogenic Target Risk (TR) = 1E-06				Noncancer Hazard Index (HI) = 1				Protection of				
SFO	k	IUR	k	RfD _a	k	RIC	k	v	o	muta-	Analyte	CAS No.	Ingestion SL	Dermal SL	Inhalation SL	Carcinogenic SL	Ingestion SL	Dermal SL	Inhalation SL	Noncarcinogenic SL	MCL	Risk-based SSL	MCL-based SSL	
(mg/kg-day) ⁻¹	e	(ug/m ³) ⁻¹	e	(mg/kg-day)	e	(mg/m ³) ⁻¹	e	c	g	gen			TR=1.0E-6 (ug/L)	TR=1.0E-6 (ug/L)	TR=1.0E-6 (ug/L)	TR=1.0E-6 (ug/L)	HQ=1 (ug/L)	HQ=1 (ug/L)	HQ=1 (ug/L)	HI=1 (ug/L)	(ug/L)	(mg/kg)	(mg/kg)	
				9.0E-01 3.0E+00		P I	3.0E-04 I	X			Formic Acid Fosetyl-Al	64-18-6 39148-24-8					1.4E+04 4.7E+04			4.1E+06 4.7E+04			2.8E+00	
				1.0E-03 1.0E-03		X I			V V		Furans ~Dibenzofuran ~Furan	132-64-9 110-00-9					1.6E+01 1.6E+01	9.2E+00 3.1E+00		5.8E+00 1.5E+01		1.1E-01 5.7E-03	3.4E-05 9.9E-03 5.9E-05	
3.8E+00		H		3.0E-03		I	5.0E-02		H		Furazolidone Furfural Furfural	67-45-8 98-01-1 531-82-8	1.8E-02	8.7E-00		1.8E-02	4.7E+01	4.9E+03		4.6E+01			3.4E-05 9.9E-03 5.9E-05	
1.5E+00		C	4.3E-04	C							Furmecycloz Glufosinate, Ammonium Glutaraldehyde	60568-05-0 77182-82-2 111-30-8	2.2E+00	1.7E+00		9.6E-01	6.3E+00			6.3E+00			1.0E-03 1.4E-03	
				4.0E-04 1.0E-01 3.0E-03		I I I	1.0E-03 I I		H		Glycidyl Glyphosate Goal	765-34-4 1071-83-6 42874-03-3					6.3E+00 1.6E-03 4.7E+01	7.0E+02	4.7E+01	6.3E+00 1.6E+03 2.4E+01	7.0E+02	3.2E-01 1.9E+00	1.4E-01	
				3.0E-03 5.0E-05 1.3E-02		A I I	1.0E-02 I I		A		Guthion Haloxypol, Methyl Harmony	86-50-0 69806-40-2 79277-27-3					4.7E+01 7.8E-01 2.0E+02	5.9E+02 2.2E+00 2.5E+04		4.3E+01 5.8E-01 2.0E+02		1.3E-02 6.4E-03 6.1E-02		
4.5E+00		I	1.3E-03	I	5.0E-04	I					Heptachlor Heptachlor Epoxide Hexabromobenzene	76-44-8 1024-57-3 87-82-1	1.5E-02 7.4E-03	2.0E-03 6.1E-03		1.8E-03 3.3E-03	7.8E+00 2.0E 01 3.1E+01	1.0E+00 1.7E-01		9.2E-01 9.2E-02 3.1E+01	4.0E-01 2.0E-01	1.4E-04 6.8E-05 1.8E-01	3.3E-02 4.1E-03	
9.1E+00		I	2.6E-03	I	1.3E-05 2.0E-03	I I					Hexabromocyclohexane, 2,2',4,4',5,5'-(BDE-153) Hexachlorobenzene Hexachlorobutadiene	68631-49-2 118-74-1 87-68-3	4.2E-02 8.6E-01	3.7E-01		4.2E-02 2.6E-01	3.1E+00 1.3E+01 1.6E+01	6.8E+00		3.1E+00 1.3E+01 4.7E+00	1.0E+00	5.3E-04 5.0E-04	1.3E-02	
6.3E+00		I	1.8E-03	I	8.0E-03	P			A		Hexachlorocyclohexane, Alpha- Hexachlorocyclohexane, Beta- Hexachlorocyclohexane, Gamma- (Lindane)	319-84-6 319-85-7 58-89-9	1.1E-02 3.7E-02 6.1E-02	1.5E-02 5.2E-02 8.5E-02		6.2E-03 2.2E-02 3.6E-02	1.3E+02 4.7E+00 6.6E+00	1.7E+02		7.3E+01 2.7E+00 2.7E+00	2.0E-01	3.6E-05 1.3E-04 2.1E-04	1.2E-03	
1.8E+00		I	5.1E-04	I							Hexachlorocyclohexane, Technical Hexachlorocyclopentadiene Hexachloroethane	608-73-1 77-47-4 67-72-1	3.7E-02 1.7E+00	5.2E-02 1.5E+00		2.2E-02 7.9E-01	9.4E+01 1.1E+01	2.9E+01 9.7E+00	2.2E+01 5.1E+00	5.0E+01	1.3E-04 7.0E-02 4.8E-04	1.6E-01		
4.0E-02		I	1.1E-05	C	3.0E-04 3.0E-03	I I	2.0E-04 I	3.0E-02	I		Hexachlorophene Hexahydro-1,3,5-trinitro-1,3,5-triazine (RDX) Hexamethylene Dithiocyanate, 1,6-	70-30-4 171-82-4 822-06-0	6.1E-01	7.3E+01		6.1E-01	4.7E+00 4.7E+01	5.6E+03	2.1E-02	4.7E+00 4.7E+01 2.1E-02		6.3E+00 2.3E-04 2.1E-04		
				6.0E-02 2.0E+00 5.0E-03		H P I	7.0E-01 I I	I V			Hexane, n- Hexanedioic Acid Hexanone, 2-	110-54-3 124-04-9 591-78-6					9.4E+02 3.1E+04 7.8E+01	4.5E+02 7.7E+06 1.9E+03	1.5E+03	2.5E+02 3.1E+04 6.3E+01		1.8E+00 7.7E-00 7.9E-03		
3.0E+00		I	4.9E-03	I	3.3E-02	I	3.0E-05	P			Hexazinone Hydrazine Hydrazine Sulfate	51235-04-2 302-01-2 10034-93-2	2.2E-02 2.2E-02		2.2E-02	5.2E+02	1.7E+04		5.0E+02		2.3E-01			
3.0E+00		I	4.9E-03	I							Hydrogen Chloride Hydrogen Fluoride Hydrogen Sulfide	7647-01-0 7664-39-3 7783-06-4					6.3E+02 9.5E+04		6.2E+02					
6.0E-02		P		4.0E-02 1.3E-02 2.5E-01		P I I					Hydroquinone Imazathil Imazaquin	123-31-9 35554-44-0 81335-37-7	1.1E+00	1.0E-02		1.1E+00	6.3E-02 2.0E-02 3.9E+03	5.6E+04 4.8E+02 1.8E+05		6.2E+02 1.4E+07 3.8E+03		7.5E-04 2.5E+00 1.9E+01		
				1.0E-02 4.0E-02 7.0E-01		A I P			V		Iodine Iprodione Iron	7553-56-2 36734-19-7 7439-89-6					1.6E-02 6.3E+02 1.1E+04	2.4E+04 6.4E+03 1.7E+06		1.6E+02 5.7E+02 1.1E+04		9.4E+00 1.7E-01 2.7E+02		
9.5E-04		I		3.0E-01 2.0E-01 1.5E-02		I I I	2.0E+00 I I	C			Isobutyl Alcohol Isophorone Isopropalin	78-83-1 78-59-1 33820-53-0	7.1E+01	1.4E+03		6.7E+01	4.7E+03 3.1E+03 2.3E+02	2.4E+05 6.1E+04		4.6E+03 3.0E+03 2.3E+02		9.5E-01 2.2E-02 5.4E+00		
				1.0E-01 5.0E-02		I I	7.0E+00 I	C			Isopropanol Isopropyl Methyl Phosphonic Acid Isoxaben	67-63-0 1832-54-8 82558-50-7					1.6E+03 7.8E+02	2.7E+05 1.9E+03		1.6E+03 5.6E+02		3.4E-01 1.5E+00		
				7.5E-02 2.0E-03		I I	3.0E-01 I	A V			JP-7 Kerb Lactofen	NA 23950-58-5 77501-63-4					1.2E+03 3.1E+01	3.9E+03 4.7E+01	6.3E+02	6.3E+02 9.0E+02 1.9E+01		9.1E-01 8.7E-01		
2.8E-01		C	8.0E-05	C							Lead Compounds ~Lead acetate ~Lead and Compounds	301-04-2 7439-92-1	2.4E-01			2.4E-01					1.5E+01		1.4E+01	
3.8E-02		C	1.1E-05	C							~Lead subacetate ~Tetraethyl Lead Linuron	1335-32-6 78-00-2 330-55-2	1.8E+00			1.8E+00	1.6E-03 3.1E+01	2.7E-03 1.4E+02		9.9E-04 2.6E+01		3.5E-06 2.3E-02		
				2.0E-03 2.0E-01 5.0E-04		P I I					Lithium Londax MCPA	7439-93-2 83055-99-6 94-74-6					3.1E+01 3.1E+03 7.8E+00	4.7E+03 1.7E+05 2.1E+01		3.1E+01 3.1E+03 5.7E+00		9.3E+00 7.9E-01 1.5E-03		

Regional Screening Level (RSL) Soil to Groundwater Supporting Table November 2011

Toxicity and Chemical-specific information										Contaminant	Carcinogenic Target Risk (TR) = 1E-06				Noncancer Hazard Index (HI) = 1				Protection of					
SFO (mg/kg-day) ⁻¹	k e y	IUR (μg/m ³) ⁻¹	k e y	RfD _a (mg/kg-day)	k e y	RfC (mg/m ³)	k e y	m u t a g e n	Other	Analyte	CAS No.	Ingestion SL TR=1.0E-6 (μg/L)	Dermal SL TR=1.0E-6 (μg/L)	Inhalation SL TR=1.0E-6 (μg/L)	Carcinogenic SL TR=1.0E-6 (μg/L)	Ingestion SL HQ=1 (μg/L)	Dermal SL HQ=1 (μg/L)	Inhalation SL HQ=1 (μg/L)	Noncarcinogenic SL HI=1 (μg/L)	MCL (μg/L)	Risk-based SSL (mg/kg)	MCL-based SSL (mg/kg)		
				1.0E-02	I					MCPB	94-81-5					1.6E+02				1.6E+02		6.2E-02		
				1.0E-03	I					MCPP	93-65-2					1.6E+01	5.1E+01			1.2E+01		3.5E-03		
				2.0E-02	I					Malathion	121-75-5					3.1E+02	7.7E+03			3.0E+02		7.9E-02		
				1.0E-01	I	7.0E-04	C			Maleic Anhydride	108-31-6					1.6E+03	2.6E+04			1.5E+03		3.0E-01		
				5.0E-01	I					Maleic Hydrazide	123-33-1					7.8E+03	6.3E+06			7.8E+03		1.6E+00		
				1.0E-04	P					Malonanitrile	109-77-3					1.6E+00	6.0E+02			1.6E+00		3.2E-04		
				3.0E-02	H					Mancozeb	8018-01-7					4.7E+02	7.8E+04			4.7E+02		6.6E-01		
				5.0E-03	I					Maneb	12427-38-2					7.8E+01				7.8E+01		1.1E-01		
				1.4E-01	I	5.0E-05	I			Manganese (Diet)	7439-96-5													
				2.4E-02	S	5.0E-05	I			Manganese (Non-diet)	7439-96-5					3.8E+02	2.3E+03			3.2E+02		2.1E+01		
				9.0E-05	H					Mepfosfolan	950-10-7					1.4E+00	1.8E+02			1.4E+00		2.1E-03		
				3.0E-02	I					Mepiquat Chloride	24307-26-4					4.7E+02				4.7E+02		1.6E-01		
				3.0E-04	I	3.0E-05	C			Mercury Compounds						4.7E+00	5.0E-01			4.3E+00	2.0E+00	3.3E-02	1.0E-01	
						3.0E-04	I	V		~Mercury Chloride (and other Mercury salts)	7487-94-7									6.3E-01	2.0E+00			
										~Mercury (elemental)	7439-97-6									6.3E-01	2.0E+00			
				1.0E-04	I					~Methyl Mercury	22967-92-6					1.6E+00	2.4E+02			1.6E+00		3.9E-04		
				8.0E-05	I					~Phenylmercuric Acetate	62-38-4					1.3E+00	4.0E+02			1.2E+00		4.6E-02		
				3.0E-05	I					Merphos	150-50-5					4.7E-01				4.7E-01				
				3.0E-05	I					Merphos Oxide	78-48-8					4.7E-01	7.0E-02			6.1E-02		3.0E-04		
				6.0E-02	I					Metalaxyl	57837-19-1					9.4E+02	4.5E+04			9.2E+02		2.5E-01		
				1.0E-04	I	7.0E-04	H	V		Methacrylonitrile	126-98-7					1.6E+00	8.5E+01	1.5E+00		7.5E-01		1.7E-04		
				5.0E-05	I					Methamidophos	10265-92-6					7.8E-01	7.2E-02			7.8E-01		1.6E-04		
				5.0E-01	I	4.0E+00	C			Methanol	67-56-1					7.8E+03	2.8E+06			7.8E+03		1.6E+00		
				1.0E-03	I					Methidathion	950-37-8					1.6E+01	4.1E-02			1.5E+01		3.7E-03		
				2.5E-02	I					Methomyl	16752-77-5					3.9E+02	4.8E+04			3.9E+02		8.5E-02		
4.9E-02	C	1.4E-05	C							Methoxy-S-nitroaniline, 2-	99-59-2	1.4E+00	4.6E+01	1.3E+00		7.8E+01	4.2E+01			2.7E+01	4.0E+01	4.6E-04	2.7E+00	
				5.0E-03	I					Methoxychlor	72-43-5					7.8E+01				1.5E+00		1.5E+00		
				8.0E-03	P	1.0E-03	P			Methoxyethanol Acetate, 2-	110-49-6					1.3E+02				1.3E+02		2.6E-02		
				5.0E-03	P	2.0E-02	I			Methoxyethanol, 2-	109-86-4					7.8E-01	4.2E+04			7.8E+01		1.6E-02		
				1.0E+00	X		V			Methyl Acetate	79-20-9					1.6E+04	1.9E+06			1.6E+04		3.2E+00		
				3.0E-02	H		V			Methyl Acrylate	96-33-3					4.7E+02	2.5E+04			4.6E+02		9.8E-02		
				6.0E-01	I	5.0E+00	I	V		Methyl Ethyl Ketone (2-Butanone)	78-93-3					9.4E+03	9.7E+05	1.0E+04		9.4E+03		1.0E+00		
				1.0E-03	X	2.0E-05	X			Methyl Hydrazine	60-34-4					1.6E+01	9.9E+03			1.6E+01		3.5E-03		
				8.0E-02	H	3.0E+00	I	V		Methyl Isobutyl Ketone (4-methyl-2-pentanone)	108-10-1					1.3E+03	3.4E+04	6.3E+03		1.0E+03		2.3E-01		
						1.0E-03	C			Methyl Isocyanate	624-83-9													
				1.4E+00	I	7.0E-01	I	V		Methyl Methacrylate	80-62-6					2.2E+04	5.3E+05	1.5E+03		1.4E+03		3.0E-01		
				2.5E-04	I					Methyl Parathion	298-00-0					3.9E+00	2.9E+01			3.4E+00		5.7E-03		
				6.0E-02	X					Methyl Phosphonic Acid	993-13-5					9.4E+02				9.4E+02		1.9E-01		
				6.0E-03	H	4.0E-02	H	V		Methyl Styrene (Mixed Isomers)	25013-15-4					9.4E+01	1.1E+02	8.3E+01		3.1E+01		5.0E-02		
				9.9E-02	C	2.8E-05	C			Methyl methanesulfonate	66-27-3	6.8E-01			6.8E-01							1.4E-04		
				1.8E-03	C	2.6E-07	C			Methyl tert-Butyl Ether (MTBE)	1634-04-4	3.7E+01	1.7E+03	1.9E+01	1.2E+01	3.7E+01		6.3E+03		6.3E+03		2.8E-03		
				2.0E-04	X					Methyl-1,4-benzenediamine dihydrochloride, 2-	615-45-2					3.1E+00	2.8E+04			3.1E+00		1.9E-03		
				9.0E-03	P					Methyl-5-Nitroaniline, 2-	99-55-8	7.5E+00	1.2E+02		7.0E+00	3.1E+02	5.2E+03			2.9E+02		3.9E-03		
				8.3E+00	C	2.4E-03	C			Methyl N-nitro-N-nitrosoguanidine, N-	70-25-7	8.1E-03			8.1E-03							2.8E-06		
				1.3E-01	C	3.7E-05	C			Methylaniline Hydrochloride, 2-	636-21-5	5.2E-01	1.5E+01		5.0E-01	5.2E-01						2.1E-04		
				1.0E-02	A					Methylarsonic acid	124-58-3					1.6E-02				1.6E+02				
				2.0E-04	X					Methylbenzene, 1,4-diamine monohydrochloride, 2-	74612-12-7					3.1E+00				3.1E+00				
				2.0E-04	X					Methylbenzene, 1,4-diamine sulfate, 2-	615-50-9					3.1E+00				3.1E+00				
				2.2E+01	C	6.3E-03	C			Methylcholanthrene, 3-	56-49-5	9.8E-04			9.8E-04							1.9E-03		
				7.5E-03	I	4.7E-07	I			Methylene Chloride	75-09-2	9.0E+00	2.5E+02	1.0E+01	4.7E+00	9.4E+02	2.5E+04	2.2E+03		6.4E+02	5.0E+00	1.2E-03	1.3E-03	
				1.0E-01	P	4.3E-04	C	2.0E-03	P	Methylene-bis[2-chloroaniline], 4,4'-	101-14-4	2.2E-01	4.0E-01		1.4E-01	3.1E+01	5.3E+01			2.0E+01		1.6E-03		
				4.6E-02	I	1.3E-05	C			Methylene-bis[N,N-dimethyl] Aniline, 4,4'-	101-61-1	1.5E+00	1.0E+00		6.0E-01							3.3E-03		
				1.6E+00	C	4.6E-04	C			Methylenebisbenzenamine, 4,4'-	101-77-9	4.2E-02	1.4E+00		4.1E-02							1.8E-04		
						6.0E-04	I			Methylenediphenyl Dilsocyanate	101-68-8													
				7.0E-02	H			V		Methylstyrene, Alpha-	98-83-9					1.1E+03	1.2E+03			5.8E+02		9.3E-01		
				1.5E-01	I					Metolachlor	51218-45-2					2.3E+03	1.9E+04			2.1E+03		2.5E+00		
				2.5E-02	I					Metrifluzin	21087-64-9					3.9E+02	1.3E+04			3.8E+02		1.2E-01		
				3.0E+00	P					Mineral oils	8012-95-1					4.7E-04				4.7E+04		1.9E+03		
				2.0E-04	I					Mirex	2385-85-5	3.7E-03			3.7E-03	3.1E+00				3.1E+00		2.7E-03		
				2.0E-03	I					Molinate	2212-67-1					3.1E+01	8.4E+01			2.3E+01		1.3E-02		
				5.0E-03	I					Molybdenum	7439-98-7					7.8E+01	1.2E+04			7.8E+01		1.6E+00		
				1.0E-01	I					Monochloramine	10599-90-3					1.6E+03	2.4E+05			1.6E+03		1.6E+03		
				2.0E-03	P					Monomethylaniline	100-61-8					3.1E+01	5.3E+02			3.0E+01		1.1E-02		
				3.0E-04	X					N,N'-Diphenyl-1,4-benzenediamine	74-31-7					4.7E+00	6.3E+00			2.7E+00		2.8E-01		
				2.0E-03	I					Naled	300-76-5					3.1E+01	4.8E+03			3.1E+01		1.4E-02		

Regional Screening Level (RSL) Soil to Groundwater Supporting Table November 2011

Key: I = IRIS; P = PPRTV; A = ATSDR; C = Cal EPA; X = PPRTV Appendix; H = HEAST; J = New Jersey; O = EPA Office of Water; E = Environmental Criteria and Assessment Office; S = see user guide Section 5; L = see user guide on lead; M = mutagen; V = volatile; F = See FAQ; c = cancer; * = where n SL < 100X c SL; ** = where n SL < 10X c SL; n = noncancer; m = Concentration may exceed ceiling limit (See User Guide); s = Concentration may exceed Csat (See User Guide); SSL values are based on DAF=1

Toxicity and Chemical-specific Information							Contaminant	Carcinogenic Target Risk (TR) = 1E-06				Noncancer Hazard Index (HI) = 1			Protection of							
SFO (mg/kg-day) ⁻¹	k e y	IUR (ug/m ³) ⁻¹	k e y	RFD _a (mg/kg-day)	k e y	RF _c (mg/m ³) ⁻¹	k e y	mul- a- gen	Analyte	CAS No.	Ingestion SL TR=1.0E-6 (ug/L)	Dermal SL TR=1.0E-6 (ug/L)	Inhalation SL TR=1.0E-6 (ug/L)	Carcinogenic SL TR=1.0E-6 (ug/L)	Ingestion SL HQ=1 (ug/L)	Dermal SL HQ=1 (ug/L)	Inhalation SL HQ=1 (ug/L)	Noncarcinogenic SL HI=1 (ug/L)	MCL (ug/L)	Risk-based SSL (mg/kg)	MCL-based SSL (mg/kg)	
				3.0E-02	X	1.0E-01	P	V	Naphtha, High Flash Aromatic (HFAN)	64724-95-6					4.7E+02			2.1E+02		1.4E+02		
1.8E+00	C	0.0E+00	C	1.0E-01 5.0E-02	I C	5.0E-04 5.0E-05	I C		Naphthylamine, 2- Napropamide Nickel Carbonyl	91-59-8 15299-99-7 13463-39-3	3.7E-02	3.1E-01		3.3E-02	1.6E+03 7.8E+02	6.4E+03 4.7E+03		1.3E+03 6.7E+02			1.7E-04 8.3E+00	
		2.4E-04 2.6E-04	I C	5.0E-02 2.0E-02	C I	1.0E-04 9.0E-05	C A		Nickel Oxide Nickel Refinery Dust Nickel Soluble Salts	1313-99-1 NA 7440-02-0					7.8E+02 7.8E+02 3.1E+02	1.2E+05 2.4E+04 9.5E+03		7.8E+02 7.6E+02 3.0E+02			1.1E+02 2.0E+01	
1.7E+00	C	4.8E-04	I	5.0E-02 1.6E+00 1.0E-01	C I I	5.0E-05 I	C		Nickel Subsulfide Nitrate Nitrite	12035-72-2 14797-55-8 14797-65-0	4.0E-02	1.5E+00		3.9E-02	7.8E+02 2.5E+04 1.6E+03	2.4E+04 3.8E+06 2.4E+05		7.6E+02 2.5E+04 1.6E+03	1.0E+04			
2.0E-02	P	4.0E-05 4.0E-05	I I	1.0E-02 4.0E-03 2.0E-03	X P I	5.0E-05 6.0E-03 9.0E-03	X P I	V	Nitroaniline, 2- Nitroaniline, 4- Nitrobenzene	88-74-4 100-01-6 98-95-3	3.4E+00	1.1E+02		3.3E+00 1.2E-01	6.3E+01 3.1E+01	2.0E+03 4.4E+02	1.9E+01	1.5E+02 6.1E+01 1.1E+01			6.2E-02 1.4E-03 7.9E-05	
1.3E+00	C	3.7E-04	C	3.0E+03 7.0E-02	P H				Nitrocellulose Nitrofurantoin Nitrofurazone	9004-70-0 67-20-9 59-87-0				5.2E-02	1.4E+01			4.7E+07 1.1E+03	4.7E+07 1.1E+03		1.0E+04 4.7E-01 4.6E-05	
1.7E-02	P	9.0E-06	P	1.0E-04 1.0E-01	P I				Nitroglycerin Nitroguanidine Nitromethane	55-63-0 556-88-7 75-52-5	4.0E+00	1.6E+02		3.9E+00	1.6E+00 1.6E+03	6.2E+01 1.3E+06		1.5E+00 1.6E+03			6.6E-04 3.8E-01 1.2E-04	
2.7E+01 1.2E+02	C C	2.7E-03 7.7E-03 3.4E-02	H C C	2.0E-02	I	V			Nitropropane, 2- Nitroso-N-ethylurea, N- Nitroso-N-methylurea, N-	79-46-9 759-73-9 684-93-5	8.0E-04 1.4E-01 1.8E-04	1.4E-01 4.3E-02		1.8E-03	1.8E-03 7.9E-04 1.8E-04		4.7E+01	4.7E+01			4.7E-07 1.9E-07 4.0E-08	
5.4E+00 7.0E+00 2.8E+00	I I I	1.6E-03 2.0E-03 8.0E-04	I I C			V			Nitroso-di-n-butylamine, N- Nitroso-di-n-propylamine, N- Nitrosodethanolamine, N-	924-16-3 621-64-7 1116-54-7	1.2E-02 9.6E-03 2.4E-02	6.7E-02 3.0E-01 4.4E+01	3.0E-03	2.4E-03 9.3E-03 2.4E-02							4.8E-06 7.0E-06 4.8E-06	
1.5E+01 5.1E+01 4.9E-03	I I I	4.3E-02 1.4E-02 2.6E-06	I I C	8.0E-06 4.0E-05	P X	M M			Nitrosodithylamine, N- Nitrosodimethylamine, N- Nitrosodiphenylamine, N-	55-18-5 62-75-9 85-30-6	1.4E-04 4.2E-04 1.4E+01	1.6E-02 1.9E-01 4.4E+01		1.4E-04 4.2E-04 1.0E+01	1.3E-01 4.9E+01		1.2E-01				5.2E-08 1.0E-07 5.7E-02	
2.2E+01 6.7E+00 9.4E+00	I C C	6.3E-03 1.9E-03 2.7E-03	C C C						Nitrosomethylethylamine, N- Nitrosomorpholine [N-] Nitrosopiperidine [N-]	10595-95-6 59-89-2 100-75-4	3.1E-03 1.0E-02 7.2E-03	5.5E-01 4.5E+00 9.3E-01	3.0E-03	1.0E-02 7.1E-03							8.7E-07 2.5E-06 3.8E-06	
2.1E+00	I	6.1E-04	I						Nitrosopyrrolidine, N- Nitrotoluene, m- Nitrotoluene, o-	930-55-2 99-08-1 88-72-2	3.2E-02 8.8E+00		3.2E-02	1.6E+00 1.4E+01 1.4E+01	9.7E+00 1.1E+02		1.3E+00 1.2E+01			1.2E-03 2.5E-04		
1.6E-02	P		P	4.0E-03 3.0E-04 4.0E-02	P X I	2.0E-01	P	V	Nitrotoluene, p- Nonane, n- Norflurazon	99-99-0 111-84-2 27314-13-2	4.2E+00	2.9E+01		3.7E+00	6.3E+01 4.7E+00 6.3E+02	4.4E+02 1.4E+04	4.2E+02	5.5E+01 4.6E+00 6.0E+02			3.4E-03 6.6E-02 3.9E+00	
		7.0E-04 3.0E-03 5.0E-02	I I I						Nustar Octabromodiphenyl Ether Octahydro-1,3,5,7-tetranitro-1,3,5,7-tetra (HMX)	85509-19-9 32536-52-0 2691-41-0					1.1E+01 4.7E+01 7.8E+02	3.5E+01 4.7E+01 4.5E+05		8.3E+00 4.7E+01 7.8E+02			1.4E+00 9.3E+00 9.9E-01	
		2.0E-03 5.0E-02 5.0E-03	H I I						Octamethylpyrophosphoramide Oryzalin Osadiazon	152-16-9 19044-88-3 19666-30-9					3.1E+01 7.8E+02 7.8E+01	3.1E+01 2.9E+03 6.4E+01		3.1E+01 6.2E+02 3.5E+01			7.5E-03 1.1E+00 3.6E-01	
		2.5E-02 1.3E-02 4.5E-03	I I I						Osamyl Paclobutrazol Paraquat Dichloride	23135-72-0 76738-62-0 1910-42-5					3.9E-02 2.0E+02 7.0E-01	3.6E+05 1.2E+02 2.5E+06		3.9E+02 1.7E+02 7.0E+01	2.0E+02		8.6E-02 3.6E-01 9.7E-01	4.4E-02
		6.0E-03 5.0E-02 4.0E-02	H H I						Parathion Pebulad Pendimethalin	56-38-2 1114-71-2 40487-42-1					9.4E+01 7.8E+02 6.3E+02	2.1E+02 9.0E+02 1.7E+02		5.5E+01 4.2E+02 1.3E+02			3.3E-01 3.3E-01 1.5E+00	
		2.0E-03 1.0E-04 8.0E-04	I I I						Pentabromodiphenyl Ether Pentabromodiphenyl ether, 2,2',4,4',5- (BDE-99) Pentachlorobenzene	32534-81-9 60348-60-9 608-93-5					3.1E+01 1.6E+00 1.3E+01	2.8E+00		3.1E+01 1.6E+00 2.3E+00			1.4E+00 6.8E-02 1.7E-02	
9.0E-02 2.6E-01 4.0E-01	P H I			3.0E-03 5.0E-03	I I				Pentachloroethane Pentachloronitrobenzene Pentachlorophenol	76-01-7 82-68-8 87-85-5	7.5E-01 2.6E-01 1.7E-01	2.2E+00 1.7E-01		5.6E-01 1.0E-01 1.7E-01	4.7E+01 3.1E+01 7.8E+01			1.9E+01 1.9E+01 7.8E+01	1.0E+00		2.7E-04 1.3E-03 1.7E-03	1.0E-02
4.0E-03	X		X	2.0E-03	P				Pentaerythritol tetranitrate (PETN) Pentane, n- Perchlorates	78-11-5 109-66-0	1.7E+01	3.7E+02		1.6E+01	3.1E+01	6.8E+02		3.0E+01 2.1E+03			2.4E-02 1.0E+01	
		7.0E-04 7.0E-04 7.0E-04	I I I						Ammonium Perchlorate Lithium Perchlorate Perchlorate and Perchlorate Salts	7790-98-9 7791-03-9 14797-73-0					1.1E+01 1.1E+01 1.1E+01	1.7E+03 1.7E+03 1.7E+03		1.1E+01 1.1E+01 1.1E+01	1.5E+01[F]			
		7.0E-04 7.0E-04 5.0E-02	I I I						Potassium Perchlorate Sodium Perchlorate Permethrin	7778-74-7 7601-89-0 52645-53-1					1.1E+01 1.1E+01 7.8E+02	8.3E+02 1.7E+03		1.1E+01 1.1E+01 7.8E+02			1.9E+02	
2.2E-03	C	6.3E-07	C						Phenacetin	62-44-2	3.1E-01	9.4E+02		3.0E+01							8.3E-03	

Regional Screening Level (RSL) Soil to Groundwater Supporting Table November 2011


Toxicity and Chemical-specific Information										Contaminant				Carcinogenic Target Risk (TR) = 1E-06				Noncancer Hazard Index (HI) = 1				Protection of		
SFO (mg/kg-day) ⁻¹	ke y	IUR (ug/m ³ -y) ⁻¹	ke y	RfD _a (mg/kg-day)	ke y	RfC _d (mg/m ³)	ke y	ke y	ke y	muta- gen	Analyte	CAS No.	Ingestion SL TR=1.0E-6 (ug/L)	Dermal SL TR=1.0E-6 (ug/L)	Inhalation SL TR=1.0E-6 (ug/L)	Carcinogenic SL TR=1.0E-6 (ug/L)	Ingestion SL HQ=1 (ug/L)	Dermal SL HQ=1 (ug/L)	Inhalation SL HQ=1 (ug/L)	Noncarcinogenic SL HI=1 (ug/L)	MCL (ug/L)	Risk-based SSL (mg/kg)	MCL-based SSL (mg/kg)	
				2.5E-01 3.0E-01	I I	2.0E-01 C					Phenmedipham Phenol	13684-63-4 108-95-2					3.9E+03 4.7E+03	1.3E+04 9.6E+04		3.0E+03 4.5E+03		1.6E+01 2.6E+00		
4.7E-02	H			5.0E-04 6.0E-03	X I						Phenothiazine Phenylenediamine, m- Phenylenediamine, o-	92-84-2 108-45-2 95-54-5	1.4E+00	2.5E+02	1.4E+00		7.8E+00 9.4E+01	5.4E+00 3.4E+04		3.2E+00 9.4E+01		1.0E-02 2.5E-02 3.8E-04		
1.9E-03	H			1.9E-01 2.0E-04	H H						Phenylenediamine, p- Phenylphenol, 2- Pharate	106-50-3 90-43-7 298-02-2	3.5E+01	1.0E+02	2.6E+01		3.0E+03 3.1E+00	1.0E+06 8.7E+00		3.0E+03 2.3E+00		7.9E-01 3.5E-01 2.6E-03		
				2.0E-02	I		3.0E-04	I	V		Phosgene Phosmet Phosphates, Inorganic	75-44-5 732-11-6					3.1E+02 3.7E+03			2.9E+02		6.4E-02		
				4.9E+01 4.9E+01 4.9E+01	P P P						*Aluminum metaphosphate *Ammonium polyphosphate *Calcium pyrophosphate	13776-88-0 68333-79-9 7790-76-3					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Diammonium phosphate *Dicalcium phosphate *Dimagnesium phosphate	7783-28-0 7757-93-9 7782-75-4					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Dipotassium phosphate *Disodium phosphate *Monoaluminum phosphate	7758-11-4 7558-79-4 13530-50-2					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Monoammonium phosphate *Monocalcium phosphate *Monomagnesium phosphate	7722-76-1 7758-23-8 7757-86-0					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Monopotassium phosphate *Monosodium phosphate *Polyphosphoric acid	7778-77-0 7558-80-7 8017-16-1					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Potassium tripolyphosphate *Sodium acid pyrophosphate *Sodium aluminum phosphate (acidic)	13845-36-8 7758-16-9 7785-88-8					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Sodium aluminum phosphate (anhydrous) *Sodium aluminum phosphate (tetrahydrate) *Sodium hexametaphosphate	10279-59-1 10305-76-7 10124-56-8					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Sodium polyphosphate *Sodium trimetaphosphate *Sodium tripolyphosphate	68915-31-1 7785-84-4 7758-29-4					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Tetrapotassium phosphate *Tetrasodium pyrophosphate *Trialuminum sodium tetra decahydrogenoctaorthophosphate (dihydrate)	7320-34-5 7722-88-5 15136-87-5					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 4.9E+01 4.9E+01	P P P						*Tricalcium phosphate *Trimagnesium phosphate *Tripotassium phosphate	7758-87-4 7757-87-1 7778-53-2					7.6E+05 7.6E+05 7.6E+05	1.2E+08 1.2E+08 1.2E+08		7.6E+05 7.6E+05 7.6E+05				
				4.9E+01 3.0E-04 4.9E+01	P I I		3.0E-04 I				*Trisodium phosphate Phosphine Phosphoric Acid	7601-54-9 7803-51-2 7664-38-2					7.6E+05 4.7E+00 7.6E+05	1.2E+08 7.1E+02 1.2E+08		7.6E+05 4.7E+00 7.6E+05				
				2.0E-05 1.0E+00 2.0E+00	I H I		2.0E-02 C				Phosphorus, White Phthalic Acid, P- Phthalic Anhydride	7723-14-0 100-21-0 85-44-9					3.1E-01 1.6E+04 3.1E+04	4.7E+01 2.3E+05 7.6E+05		3.1E-01 1.5E+04 3.0E+04		1.1E-03 5.3E+00 6.6E+00		
				7.0E-02 1.0E-04 1.0E-02	I X I						Picloram Picramic Acid (2-Amino-4,6-dinitrophenol) Phimiphos, Methyl	1918-02-1 96-91-3 29232-93-7					1.1E+03 1.6E+00 1.6E+02	3.1E+04 1.5E+02 2.2E+02		1.1E+03 1.5E+00 9.1E+01	5.0E+02	2.9E-01 1.0E-03 8.7E-02	1.4E-01	
3.0E+01	C	8.6E-03	C	7.0E-06	H						Polybrominated Biphenyls Polychlorinated Biphenyls (PCBs)	59536-65-1	2.2E-03		2.2E-03		1.1E-01			1.1E-01				
7.0E-02	S	2.0E-05	S	7.0E-05	I						*Aroclor 1016	12674-11-2	9.6E-01		9.6E-01		1.1E+00			1.1E+00		9.2E-02		
2.0E+00	S	5.7E-04	S							V	*Aroclor 1221	11104-28-2	3.4E-02	1.2E-02	8.5E-03	4.3E-03						7.4E-05		
2.0E+00	S	5.7E-04	S							V	*Aroclor 1232	11141-16-5	3.4E-02	1.2E-02	8.5E-03	4.3E-03						7.4E-05		
2.0E+00	S	5.7E-04	S								*Aroclor 1242	53469-21-9	3.4E-02			3.4E-02						5.3E-03		
2.0E+00	S	5.7E-04	S								*Aroclor 1248	12672-29-6	3.4E-02			3.4E-02						5.2E-03		
2.0E+00	S	5.7E-04	S	2.0E-05	I						*Aroclor 1254	11097-69-1	3.4E-02			3.4E-02	3.1E-01			3.1E-01		8.8E-03		
2.0E+00	S	5.7E-04	S								*Aroclor 1260	11096-82-5	3.4E-02			3.4E-02						2.4E-02		
3.9E+00	E	1.1E-03	E	3.3E-05	E	1.3E-03	E				*Heptachlorobiphenyl, 2,3,3',4,4',5,5'- (PCB 189)	39635-31-9	1.7E-02			1.7E-02	5.2E-01			5.2E-01		1.2E-02		
3.9E+00	E	1.1E-03	E	3.3E-05	E	1.3E-03	E				*Hexachlorobiphenyl, 2,2',4,4',5,5'- (PCB 167)	52663-72-6	1.7E-02			1.7E-02	5.2E-01			5.2E-01		7.2E-03		
3.9E+00	E	1.1E-03	E	3.3E-05	E	1.3E-03	E				*Hexachlorobiphenyl, 2,3,3',4,4',5,5'- (PCB 157)	69782-90-7	1.7E-02			1.7E-02	5.2E-01			5.2E-01		7.4E-03		
3.9E+00	E	1.1E-03	E	3.3E-05	E	1.3E-03	E				*Hexachlorobiphenyl, 2,3,3',4,4',5'- (PCB 156)	38380-08-4	1.7E-02			1.7E-02	5.2E-01			5.2E-01		7.4E-03		
3.9E+03	E	1.1E+00	E	3.3E-08	E	1.3E-06	E				*Hexachlorobiphenyl, 3,3',4,4',5,5'- (PCB 169)	32774-16-6	1.7E-05			1.7E-05	5.2E-04			5.2E-04		7.2E-06		
3.9E+00	E	1.1E-03	E	3.3E-05	E	1.3E-03	E				*Pentachlorobiphenyl, 2',3,4,4',5'- (PCB 123)	65510-44-3	1.7E-02			1.7E-02	5.2E-01			5.2E-01		4.5E-03		

Regional Screening Level (RSL) Soil to Groundwater Supporting Table November 2011

Toxicity and Chemical-specific Information									Contaminant				Carcinogenic Target Risk (TR) = 1E-06					Noncancer Hazard Index (HI) = 1			Protection of	
SFO (mg/kg-day) ¹	IRIS k v (ug/m ³) ¹	IUR k v (ug/m ³) ¹	RD ₅₀ k v (mg/kg-day)	RC ₁ k v (mg/m ³)	RC ₂ k v (mg/m ³)	mutagen	Analyte	CAS No.	Ingestion SL TR=1.0E-6 (ug/L)	Dermal SL TR=1.0E-6 (ug/L)	Inhalation SL TR=1.0E-6 (ug/L)	Carcinogenic SL TR=1.0E-6 (ug/L)	Ingestion SL HQ=1 (ug/L)	Dermal SL HQ=1 (ug/L)	Inhalation SL HQ=1 (ug/L)	Noncarcinogenic SL HI=1 (ug/L)	MCL (ug/L)	Risk-based SSL (mg/kg)	MCL-based SSL (mg/kg)			
							Silver	7440-22-4					7.8E+01	7.9E+02		7.1E+01		6.0E+01				
1.2E-01	H		5.0E-03				Silmazine	122-34-9	5.6E-01	7.9E+00		5.2E-01	7.8E+01	1.1E+03		7.3E+01	4.0E+00	2.6E-04	2.0E-03			
			1.3E-02				Sodium Acifluorfen	62476-59-9					2.0E+02	1.5E+05		2.0E+02		1.6E+00				
			4.0E-03				Sodium Azide	26628-72-8					6.3E+01	9.5E+03		6.2E+01						
2.7E-01	H		3.0E-02				Sodium Diethyldithiocarbamate	148-18-5	2.5E-01			2.5E-01	4.7E+02			4.7E+02						
			5.0E-02	A	1.3E-02	C	Sodium Fluoride	7681-49-4					7.8E+02	1.2E+05		7.8E+02						
			2.0E-05				Sodium Fluoroacetate	62-74-8					3.1E-01			3.1E-01		6.3E-05				
2.4E-02	H		1.0E-03	H			Sodium Metavanadate	13718-26-8					1.6E+01	2.4E+03		1.6E+01						
			3.0E-02				Strofos (Tetrachlorovinphos)	961-11-5	2.8E+00	1.6E-01		2.4E+00	4.7E+02	2.7E+03		4.0E+02		7.0E-03				
			6.0E-01				Strontium, Stable	2440-24-6					9.4E+03	1.4E+06		9.3E+03		3.3E+02				
			3.0E-04				Strychnine	57-24-9					4.7E+00	2.3E+02		4.6E+00		5.1E-02				
			2.0E-01	I	1.0E+00	I	Styrene	100-42-5					3.1E+03	7.1E+03	2.1E+03	1.1E+03	1.0E+02	1.2E+00	1.1E-01			
			8.0E-04	P			Sulfonylbis(4-chlorobenzene), 1,1'-	80-07-9					1.3E+01			1.3E+01		7.4E-02				
					1.0E-03	C	Sulfuric Acid	7664-93-9														
			2.5E-02	I			Synthane	88671-89-0					3.9E+02	3.4E+03		3.5E+02		4.3E+00				
			3.0E-02	H			TCMTB	21564-17-0					4.7E+02	1.7E+03		3.7E+02		2.6E+00				
			7.0E-02	I			Tebuthiuron	34014-18-1					1.1E+03	3.3E+04		1.1E+03		3.0E-01				
			2.0E-02	H			Termephos	3383-96-8					3.1E+02			3.1E+02		6.0E+01				
			1.3E-02				Terbacil	5902-51-2					2.0E+02	4.9E+03		2.0E+02		5.9E-02				
			2.5E-05	H			Terbufos	13071-79-9					3.9E-01	3.2E-01		1.8E-01		3.9E-04				
			1.0E-03	I			Terbutryn	886-50-0					1.6E+01	2.9E+01		1.0E+01		1.4E-02				
			1.0E-04	I			Tetraerodiphenyl ether, 2,2',4,4'-(BDE-47)	5436-43-1					1.6E+00			1.6E+00		4.2E-02				
			3.0E-04				Tetrachlorobenzene, 1,2,4,5-	95-94-3					4.7E+00	1.7E+00		1.2E+00		5.8E-03				
2.6E-02	I	7.4E-06	I	3.0E-02		V	Tetrachloroethane, 1,1,1,2-	630-20-6	2.6E+00	9.3E+00	6.6E-01	5.0E-01	4.7E+02	1.7E+03		3.7E+02		1.9E-04				
2.0E-01	I	5.8E-05	C	2.0E-02		V	Tetrachloroethane, 1,1,2,2-	79-34-5	3.4E-01	2.8E+00	8.4E-02	6.6E-02	3.1E+02	2.6E+03		2.8E+02		2.6E-05				
5.4E-01	C	5.9E-06	C	1.0E-02	I	2.7E-01	A	Tetrachloroethylene	127-18-4	1.2E-01	2.2E-01	8.2E-01	7.2E-02	1.6E+02	2.7E+02	5.7E+02	8.4E+01	5.0E+00	3.3E-05	2.3E-03		
			3.0E-02	I			Tetrachlorophenol, 2,3,4,6-	58-90-2					4.7E+02	2.8E+02		1.7E+02		1.1E+00				
2.0E+01	H		5.0E-04	I			Tetrachlorotoluene, p-alpha, alpha-	5216-25-1	3.4E-03			3.4E-03					1.1E-05	1.1E-05				
					8.0E+01	I	V	Tetraethyl Dithiopyrophosphate	3689-24-5				7.8E+00	1.7E+01		5.3E+00		3.9E-03				
			4.0E-03	P			Tetrafluoroethane, 1,1,1,2-	811-97-2					6.3E+01			1.7E+05		9.3E+01				
			1.0E-05	X			Tertryl (Trinitrophenylmethyl)nitramine	479-45-8							1.7E-05	6.3E+01		5.9E-01				
			1.0E-02	I			Thallium (Soluble Salts)	7440-28-0					1.6E-01	2.4E+01		1.6E-01	2.0E+00	1.1E-02	1.4E-01			
			7.0E-02	X			Thiobencarb	28249-77-6					1.6E+02	5.5E+02		1.2E+02		4.2E-01				
			7.0E-02	X			Thiodiglycol	111-48-8					1.1E+03	6.8E+05		1.1E+03		2.2E-01				
			3.0E-04	H			Thiofanox	39196-18-4					4.7E+00	3.1E+01		4.1E+00		1.4E-03				
			8.0E-02	I			Thiophanate, Methyl	23564-05-8					1.3E+03	1.5E+05		1.2E+03		1.1E+00				
			5.0E-03	I			Thiram	137-26-8					7.8E+01	2.8E+03		7.6E+01		1.1E-01				
			6.0E-01	H			Tin	7440-31-5					9.4E+03	1.4E+06		9.3E+03		2.3E+03				
			8.0E-02	I	1.0E-04	A	V	Titanium Tetrachloride	7550-45-0				1.3E+03	3.7E+03	1.0E+04	8.6E+02	1.0E+03	5.9E-01	6.9E-01			
1.8E-01	X		1.0E-04	X			Toluene-2,5-diamine	95-70-5	3.7E-01			3.7E-01	1.6E+00			1.6E+00		1.2E-04				
1.9E-01	H						Toluidine, p-	106-49-0	3.5E-01	9.1E+00		3.4E-01					3.0E+00	1.4E-04				
1.1E+00	I	3.2E-04	I				Toxaphene	8001-35-2	6.1E-02	1.7E-02		1.3E-02						2.1E-03	4.6E-01			
			7.5E-03	I			Tralometrin	66841-25-6					1.2E+02			1.2E+02		4.5E+01				
			3.0E-04	A			Tri-n-butyltin	688-73-3					4.7E+00			4.7E+00		1.0E-01				
			1.3E-02				Triallate	2303-17-5					2.0E+02	1.5E+02		8.7E+01		1.9E-01				
			1.0E-02	I			Trisulfuron	82097-50-5					1.6E+02			1.6E+02		1.6E-01				
			5.0E-03	I			Tribromobenzene, 1,2,4-	615-54-3					7.8E+01			7.8E+01		1.1E-01				
9.0E-03	P		1.0E-02	P			Tributyl Phosphate	126-73-8	7.5E+00	1.1E+01		4.9E+00	1.6E+02	2.3E+02		9.3E+01		2.2E-02				
			3.0E-04	P			Tributyltin Compounds	NA					4.7E+00			4.7E+00						
			3.0E-04	I			Tributyltin Oxide	56-35-9					4.7E+00	6.7E+01		4.4E+00		2.3E+02				
			3.0E+01	I	3.0E+01	H	V	Trichloro-1,2,2-trifluoroethane, 1,1,2-	76-13-1				4.7E+05	1.4E+06	6.3E+04	5.3E+04		1.3E+02				
7.0E-02	I		2.0E-02				Trichloroacetic Acid	76-03-9	9.6E-01	3.9E+01		9.4E-01	3.1E+02	1.3E+04		3.1E+02	6.0E+01	1.9E-04	1.2E-02			
2.9E-02	H						Trichloroaniline HCl, 2,4,6-	33663-50-2	2.3E+00	3.2E+03		2.3E+00				2.7E+03		6.4E-03				
7.0E-03	X		3.0E-05	X			Trichloroaniline, 2,4,6-	634-93-5	9.6E+00	1.7E+01		6.1E+00	4.7E-01	8.3E-01		3.0E-01		2.7E-03				
2.9E-02	P		8.0E-04	X		V	Trichlorobenzene, 1,2,3-	87-61-6					1.3E+01	8.9E+00		5.2E+00		1.5E-02				
			1.0E-02	I	2.0E-03	P	V	Trichlorobenzene, 1,2,4-	120-82-1	2.3E+00	1.7E+00	9.9E-01	1.6E+02	1.2E+02	4.2E+00	3.9E+00	7.0E+01	2.9E-03	2.0E-01			
			2.0E+00	I	5.0E-00	I	V	Trichloroethane, 1,1,1-	71-55-6				3.1E+04	1.8E+05	1.0E+04	7.5E+03	2.0E+02	2.6E+00	7.0E-02			
5.7E-02	I	1.6E-05	I	4.0E-03	I	2.0E-04	X	V	Trichloroethane, 1,1,2-	79-00-5	1.2E+00	1.7E-01	3.0E-01	2.4E-01	6.3E-01	8.9E-02	4.2E-01	5.0E+00	7.7E-05	1.6E-03		
See FAQ	I	See FAQ	I	5.0E-04	I	2.0E-03	I	V	Trichloroethylene	79-01-6	1.0E+00	6.6E+00	8.6E-01	4.4E-01	7.8E+00	4.9E+01	4.2E+00	1.6E-04	1.8E-03			
			3.0E-01	I	7.0E-01	H	V	Trichlorofluoromethane	75-69-4				4.7E+03	2.6E+04	1.5E+03	1.1E+03		6.9E-01				
1.1E-02	I	3.1E-06	I	1.0E-03	P		Trichlorophenol, 2,4,5-	95-95-4				6.1E+00	1.6E+03	2.0E+03		8.9E+02		3.3E+00				
			1.0E-02	I			Trichlorophenol, 2,4,6-	88-06-2					1.6E+01	2.1E+01		9.0E+00		1.3E-02				
			1.0E-02	I			Trichlorophenoxyacetic Acid, 2,4,5-	93-76-5					1.6E+02	6.2E+02		1.2E+02		5.2E-02				
			8.0E-03	I			Trichlorophenoxypropionic acid, -2,4,5	93-72-1					1.3E+02	2.6E+02		8.4E+01	5.0E+01	4.6E-02	2.8E-02			

Regional Screening Level (RSL) Soil to Groundwater Supporting Table November 2011


Toxicity and Chemical-specific Information										Contaminant		Carcinogenic Target Risk (TR) = 1E-06				Noncarcinogenic Hazard Index (HI) = 1				Protection of	
SFO (mg/kg-day) ⁻¹	k e IUR (ug/m ³) ⁻¹	k e RfD _a (mg/kg-day)	k e RfC _d (mg/m ³)	k e V c	k e M c	k e M c	Analyte	CAS No.	Ingestion SL TR=1.0E-6 (ug/L)	Dermal SL TR=1.0E-6 (ug/L)	Inhalation SL TR=1.0E-6 (ug/L)	Carcinogenic SL TR=1.0E-6 (ug/L)	Ingestion SL HQ=1 (ug/L)	Dermal SL HQ=1 (ug/L)	Inhalation SL HQ=1 (ug/L)	Noncarcinogenic SL H=1 (ug/L)	MCL (ug/L)	Risk-based SSL (mg/kg)	MCL-based SSL (mg/kg)		
3.0E+01	I	5.0E-03 4.0E-03	I I	3.0E-04	I	V M	Trichloropropane, 1,1,2- Trichloropropane, 1,2,3- Trichloropropene, 1,2,3- Tridiphane Triethylamine	598-77-6 96-18-4 96-19-5 58138-08-2 121-44-8	7.2E-04	6.7E-03		6.5E-04	7.8E+01 6.3E+01	5.4E+02	6.3E-01	7.8E+01 6.2E-01		3.1E-02 2.8E-07			
7.7E-03 2.0E-02	I P	7.5E-03 1.0E-02	I P	3.0E-04	P	V V	Trifluralin Trimethyl Phosphate Trimethylbenzene, 1,2,3- Trimethylbenzene, 1,2,4- Trimethylbenzene, 1,3,5- Trinitrobenzene, 1,3,5-	1582-09-8 512-56-1 526-73-8 95-63-6 108-67-8 99-35-4	8.7E+00 3.4E+00	2.9E+00 2.4E+03		2.2E+00 3.4E+00	1.2E+02 1.6E+02	3.9E+01 1.1E+05		2.9E+01 1.6E+02 1.0E+01		7.2E-02 7.4E-04 1.5E-02			
3.0E-02 2.0E-02	I P	5.0E-04 2.0E-02 7.0E-03	I P I	3.0E-04	P	V V	Trinitrotoluene, 2,4,6- Triphenylphosphine Oxide Tris(2-chloroethyl)phosphate	118-96-7 791-28-6 115-96-8	2.2E+00	9.1E-01		2.2E+00	7.8E-00 3.1E+02	3.2E+02 2.7E+03	7.6E+00 2.8E+02		1.3E-02 1.2E+00 3.2E-03				
3.2E-03 1.0E+00	P C	1.0E-01 2.9E-04	P C	3.0E-04	A	M	Tris(2-ethylhexyl)phosphate Uranium (Soluble Salts) Urethane	78-42-2 NA 51-79-6	2.1E+01			2.1E+01	1.6E-03 4.7E+01	7.1E+03	1.6E+03 4.7E+01	3.0E+01	1.0E+02 2.1E+01 4.8E-06	1.4E+01			
8.3E-03	P	9.0E-03 5.0E-03 1.0E-03	I S I	7.0E-06	P		Vanadium Pentoxide Vanadium and Compounds Vernolate	1314-62-1 NA 1929-77-7					1.4E+02 7.9E+01 1.6E+01	5.5E+02 1.2E+04 1.8E-01	1.1E+02 7.8E-01 8.3E+00		7.8E+01 6.6E-03				
3.2E-05	H	2.5E-02 1.0E+00	I H	2.0E-01	I	V V	Vinclozolin Vinyl Acetate Vinyl Bromide	50471-44-8 108-05-4 593-60-2				1.5E-01	3.9E+02 1.6E+04	2.6E+03 9.2E+05	4.2E+02 6.3E+00	3.4E+02 4.1E+02 6.3E+00		2.6E-01 8.7E-02 4.4E-05			
7.2E-01	I	4.4E-06	I	3.0E-03 3.0E-04 2.0E-01	I I S	I V M	Vinyl Chloride Warfarin Xylene, P-	75-01-4 81-81-2 106-42-3	1.7E-02	2.6E-01	3.2E-01	1.5E-02	4.7E+01 4.7E+00	5.8E+02 6.0E+01	2.1E+02 2.1E+02	3.6E+01 4.4E+00 1.9E+02	2.0E+00	5.3E-06 4.6E-03 1.8E-01	6.9E-04		
		2.0E-01 2.0E-01 2.0E-01	S S I	1.0E-01	S S I	V V V	Xylene, m- Xylene, o- Xylenes	108-38-3 95-47-6 1330-20-7					3.1E+03 3.1E+03	4.9E+03 5.5E+03	2.1E+02 2.1E+02	1.9E+02 1.9E+02	1.0E+04	1.8E-01 1.9E-01 1.9E-01	9.8E+00		
		3.0E-04 3.0E-01 5.0E-02	I I I				Zinc Phosphide Zinc and Compounds Zinc	1314-84-7 7440-66-6 12122-67-7					4.7E-00 4.7E+03	1.2E+03 1.2E+06	4.7E+00 7.8E+02		2.9E+02 2.3E+00				

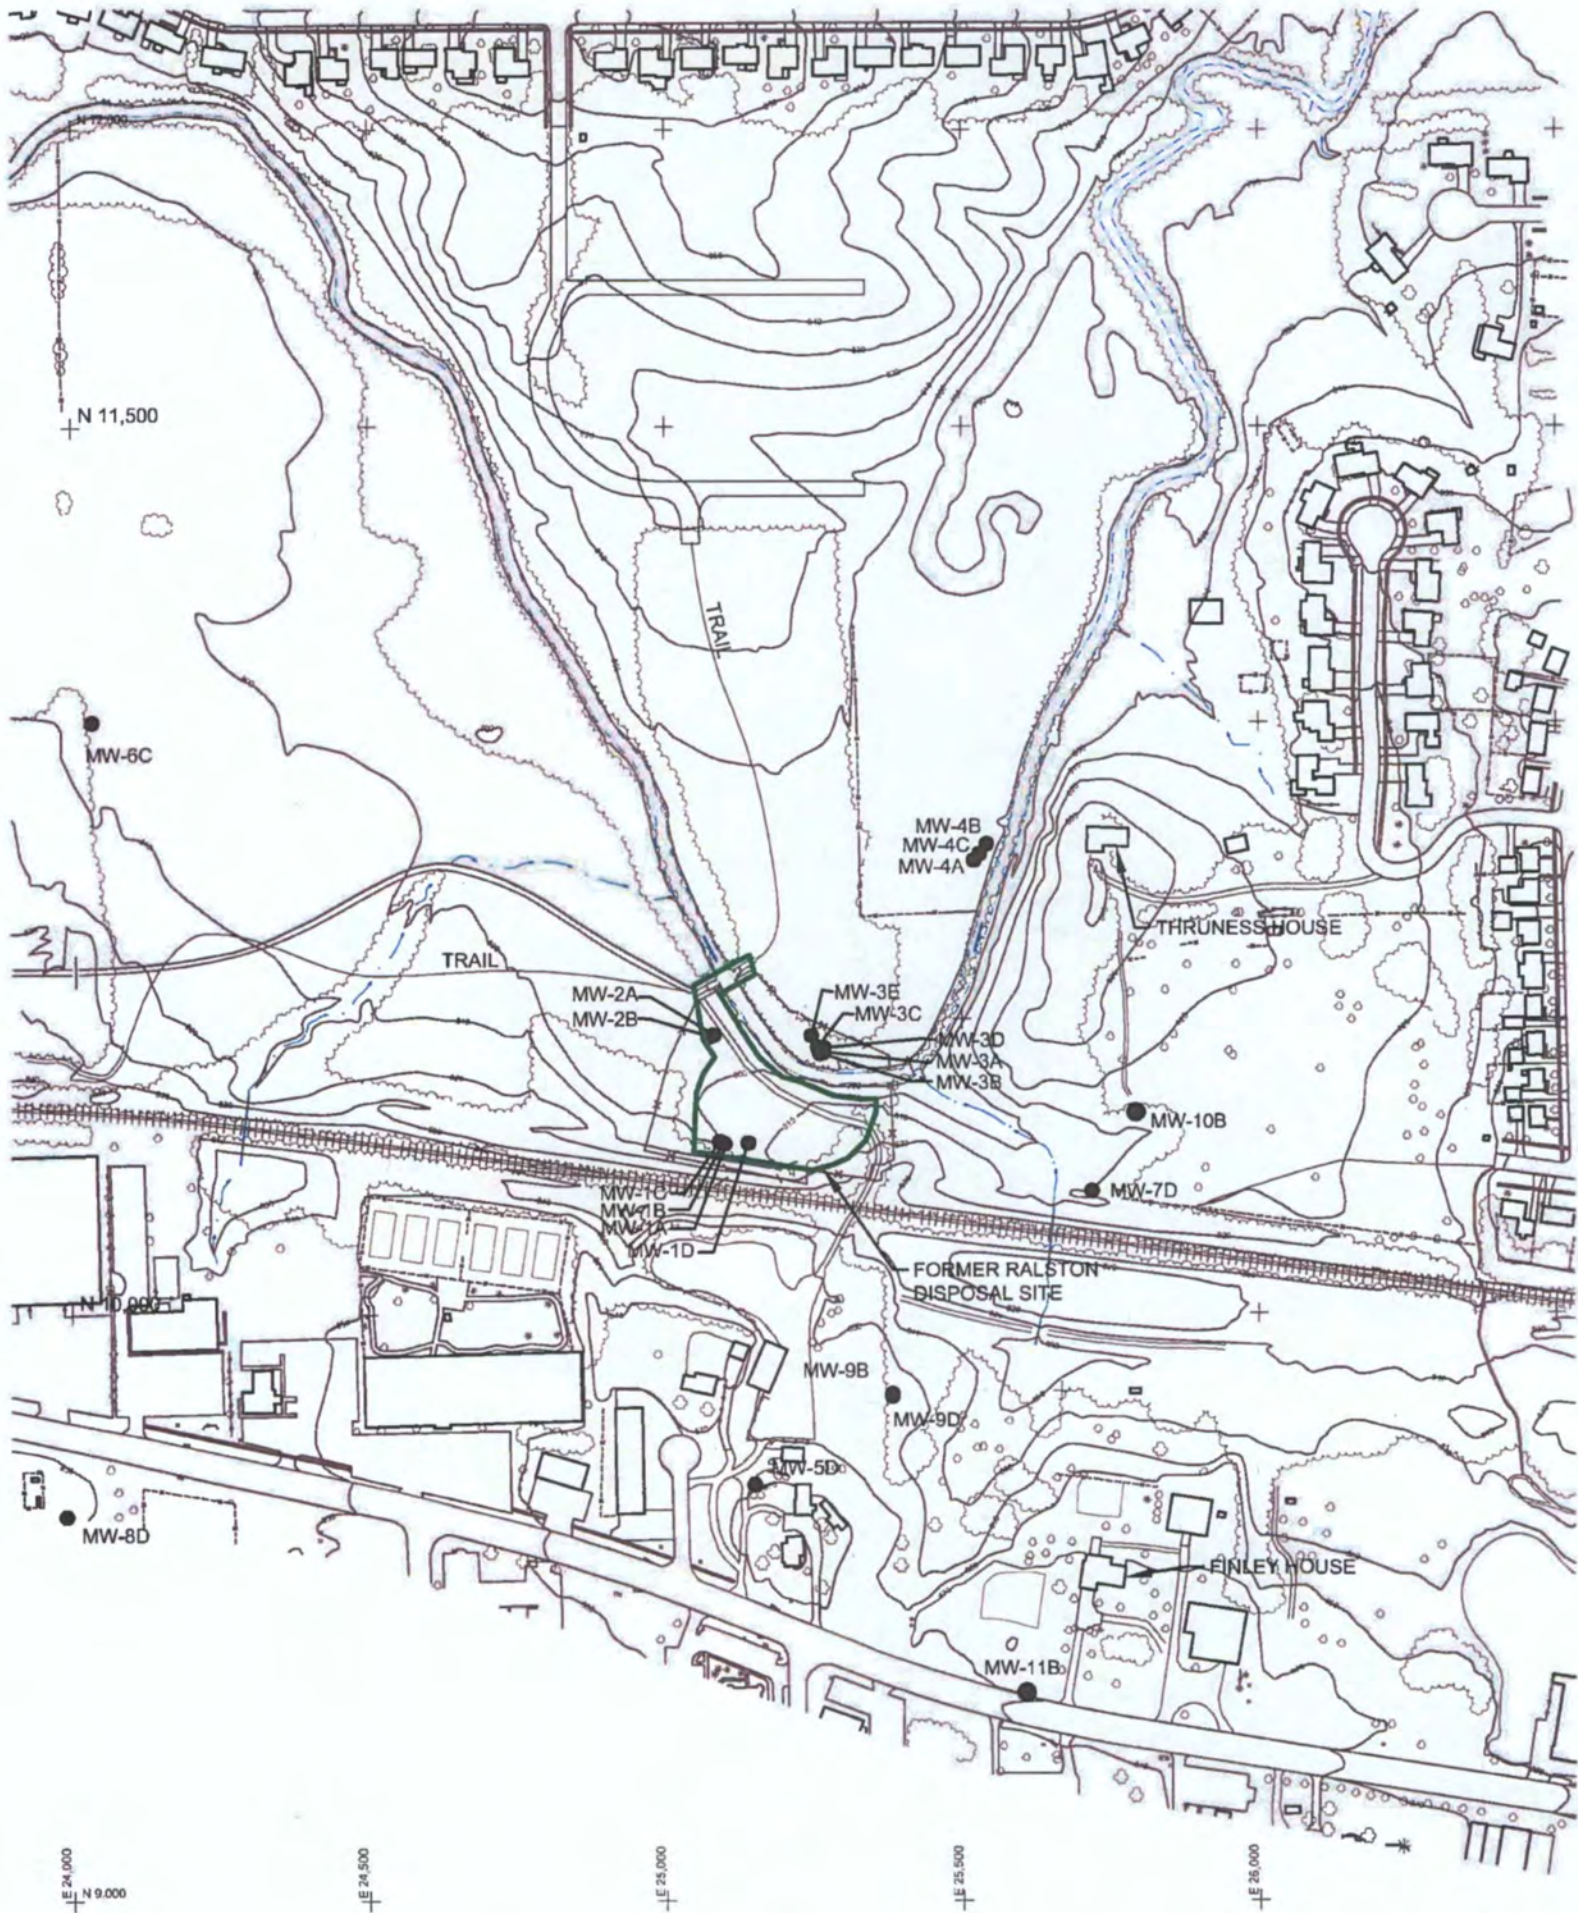

LEGEND:

- MONITORING WELL
- EXTENT OF DISPOSAL CAP
- X—X— FENCE


DESIGNED BY	
DRAWN BY	NORA DAY
CHECKED BY	ROB MALCOMSON
APPROVED BY	
PROJECT MANAGER	STEVE VARSA
CLIENT APPROVAL	
CLIENT REFERENCE NO.	



PROJECT LOCATION	DES MOINES, IOWA
PROJECT	ROCKWELL COLLINS, INC CEDAR RAPIDS, IOWA
TITLE	SITE MAP

MWH

FIGURE	1	REVISION	
FILE NAME			

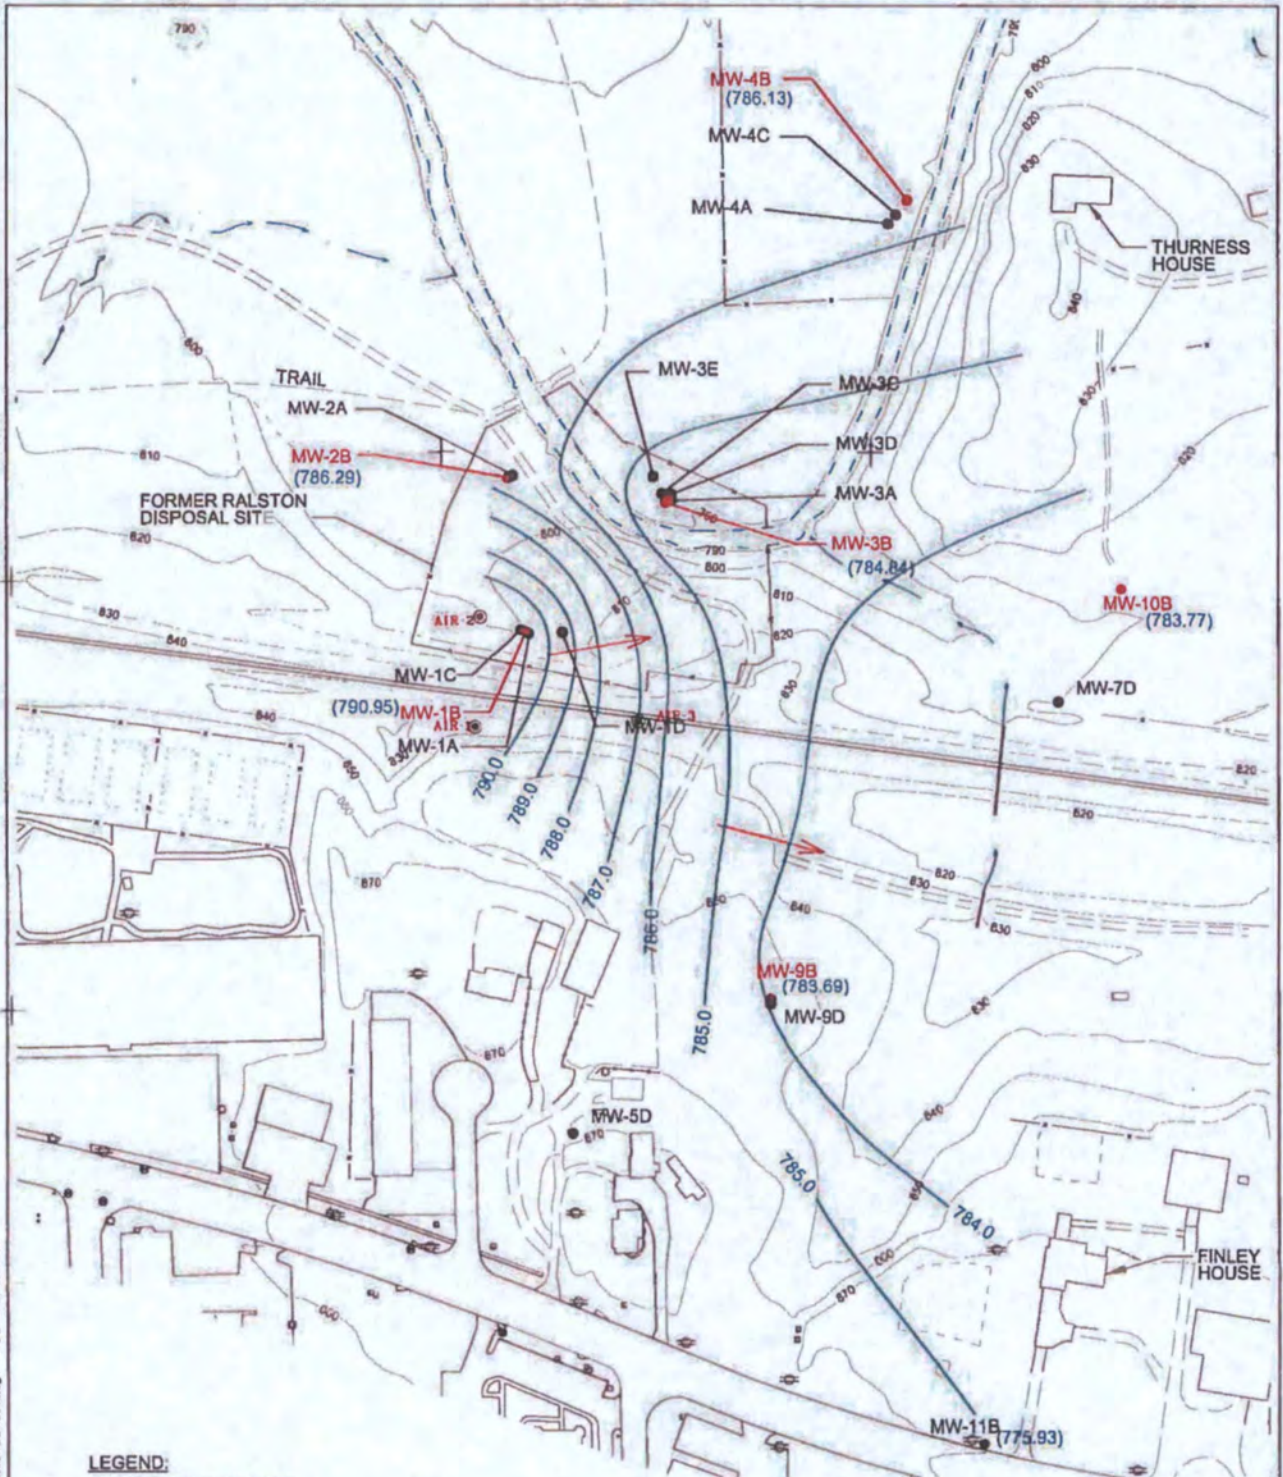

LEGEND:

- MONITORING WELL
- (783.56) GROUNDWATER ELEVATION (JUNE 11, 2013)
- EQUIPOTENTIAL LINE
- ← INFERRED GROUNDWATER FLOW DIRECTION
- FENCE

DESIGNED BY	
DRAWN BY	HORA DAY
CHECKED BY	MIKE ALOWITZ
APPROVED BY	
PROJECT MANAGER	STEVE VARGA
CLIENT APPROVAL	
CLIENT REFERENCE NO.	




PROJECT LOCATION	DES MOINES, IOWA
PROJECT	ROCKWELL COLLINS, INC CEDAR RAPIDS, IOWA
TITLE	APPROXIMATE GROUNDWATER FLOW DIRECTION DEVONIAN AQUIFER (B WELLS) JUNE 11, 2013




FIGURE	2	REVISION	
FILE NAME			

I:\USMA\1522\Projects\CAD\RockwellCollins_RapidResponse\AGFD04\2013.dgn 7/22/2013 3:06:15 PM

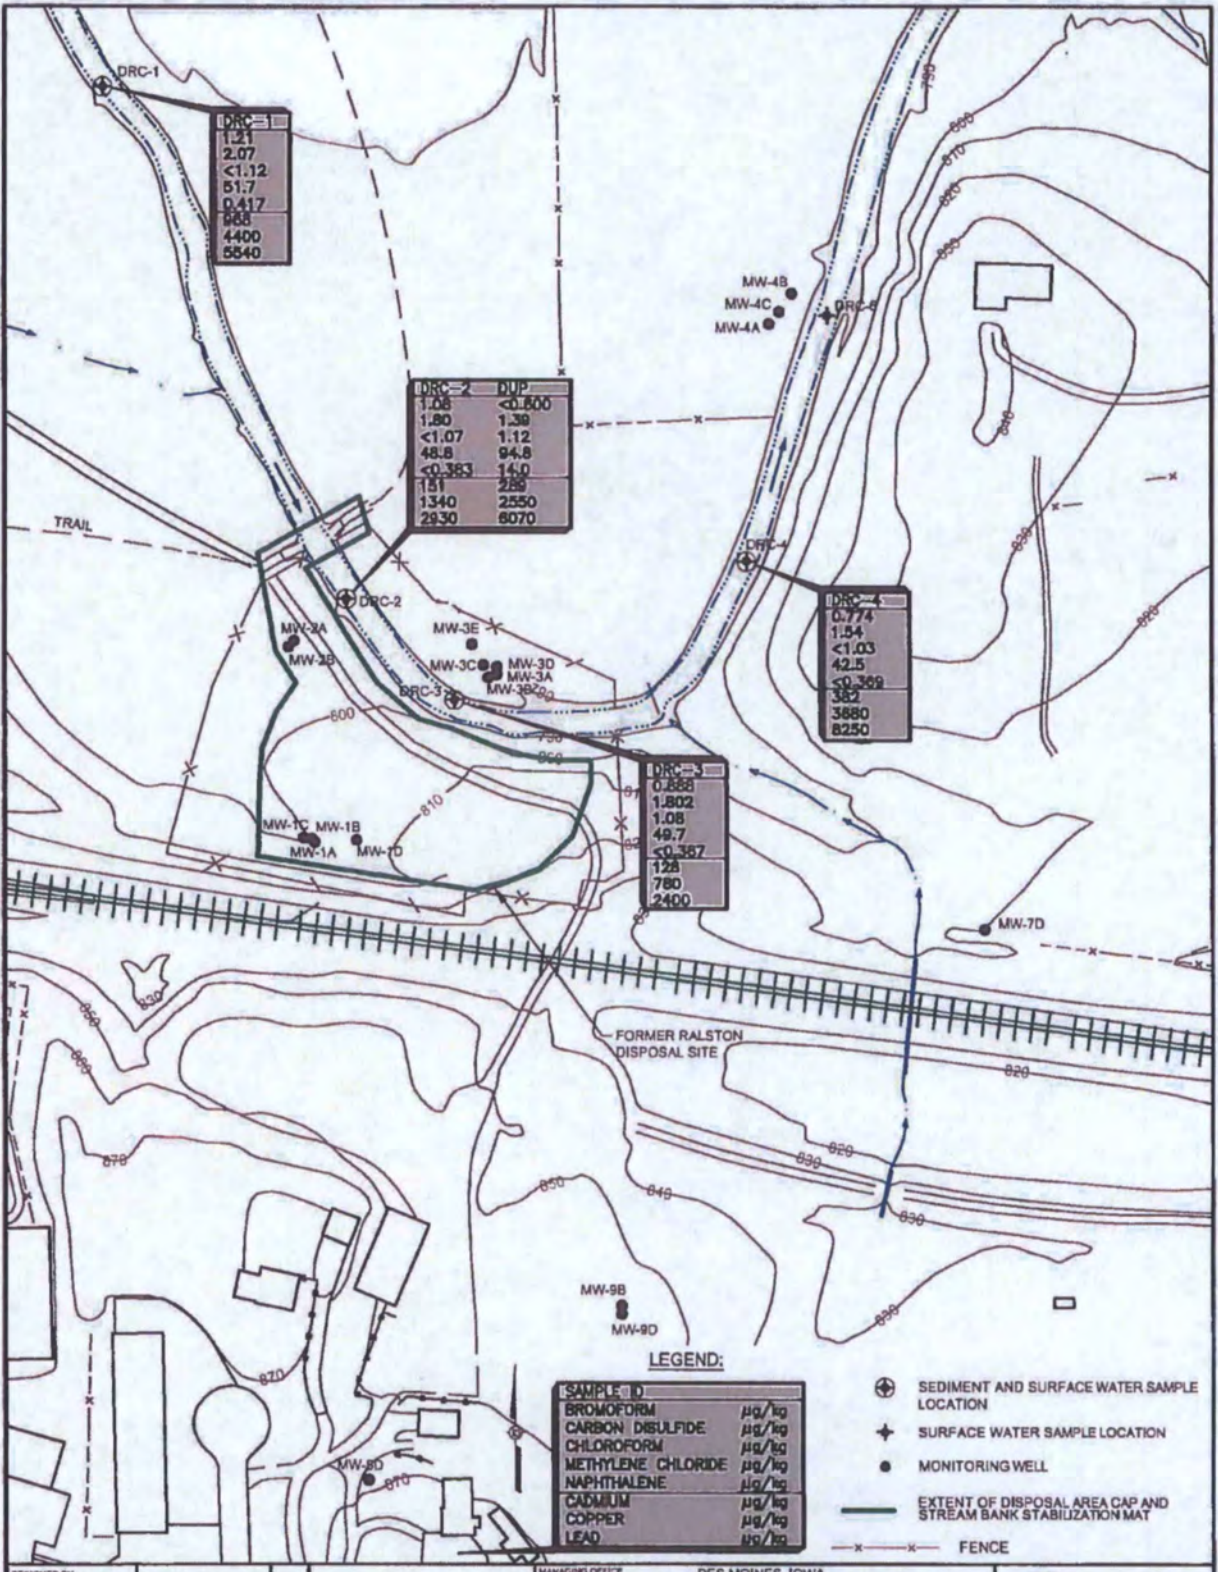

D:_USWA\1000p\uswa\c\h\road\w\m\cedar\fig\dd\rl\st\on\DRC-SS-028113.dwg 1/20/2012 9:28:23 AM

DESIGNED BY	NORA DAY
CHECKED BY	MKE ALONIZ
APPROVED BY	
PROJECT MANAGER	STIVE VARSA
CLIENT APPROVAL	
CLIENT REFERENCE NO.	



MANAGER OFFICE	DES MOINES, IOWA
PROJECT	ROCKWELL COLLINS, INC CEDAR RAPIDS, IOWA
TITLE	DRY RUN CREEK SEDIMENT SAMPLING EVENT JUNE 2013

MWH

FIGURE 4 REVISION
FILE NAME

TABLE 1

JUNE 2013 GROUNDWATER ANALYTICAL RESULTS – VOLATILE ORGANIC COMPOUNDS
FORMER RALSTON DISPOSAL SITE – CEDAR RAPIDS, IOWA

Well ID:	MW-1A	MW-1B	MW-1C	MW-1D	MW-2A ^a	MW-2B	MW-3A	MW-3B	MW-3C	MW-3D ^b
Sample Date:	06/12/13	06/12/13	06/12/13	06/12/13	06/13/13	06/13/13	06/13/13	06/13/13	06/13/13	06/13/13
Compound										
Acetone	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0
Benzene	<0.500	<0.500	<0.500	<0.500	<0.500 / <0.500	<1.0	2.04	17.1	55.4	<0.500 / <0.500
Bromodichloromethane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<5.0	<5.0	<5.0	<5.0	<1.0 / <1.0
Bromoform	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0	<4.0	<4.0	<4.0	<4.0	<5.0 / <5.0
Bromomethane	<4.0	<4.0	<4.0	<4.0	<4.0 / <4.0	<10.0	<10.0	<10.0	<10.0	<4.0 / <4.0
2-Butanone (MEK)	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0	<1.0	<1.0	<1.0	<1.0	<10.0 / <10.0
Carbon Disulfide	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<2.0	<2.0	<2.0	<2.0	<1.0 / <1.0
Carbon Tetrachloride	<2.0	<2.0	<2.0	<2.0	<2.0 / <2.0	<1.0	<1.0	<1.0	<1.0	<2.0 / <2.0
Chlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<5.0	<5.0	<5.0	<5.0	<1.0 / <1.0
Chlorodibromomethane	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0	<4.0	<4.0	<4.0	<4.0	<5.0 / <5.0
Chloroethane	<4.0	<4.0	<4.0	<4.0	<4.0 / <4.0	<1.0	<1.0	<1.0	<1.0	<4.0 / <4.0
Chloroform	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<3.0	<3.0	<3.0	<3.0	<1.0 / <1.0
Chloromethane	<3.0	<3.0	<3.0	<3.0	<3.0 / <3.0	<1.0	<1.0	<1.0	<1.0	<3.0 / <3.0
1,2-Dichlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	2.44	<1.0	<1.0	<1.0 / <1.0
1,3-Dichlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
1,4-Dichlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
1,1-Dichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	2.71	<1.0	1.45	<1.0 / <1.0
1,2-Dichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<2.0	<2.0	<2.0	<2.0	<1.0 / <1.0
1,1-Dichloroethene	<2.0	<2.0	3.22	<2.0	<2.0 / <2.0	<2.0	164	159	194	<2.0 / <2.0
cis-1,2-Dichloroethene	<1.0	3.68	250	19.7	<1.0 / <1.0	<1.0	12,600	6,330	16100	<1.0 / <1.0
trans-1,2-Dichloroethene	<1.0	<1.0	1.77	<1.0	<1.0 / <1.0	<1.0	110	46.3	219	<1.0 / <1.0
1,2-Dichloropropane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
cis-1,3-Dichloropropene	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0
trans-1,3-Dichloropropene	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0
Ethylbenzene	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
2-Hexanone	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0
4-Methyl-2-pentanone (MIBK)	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0	<10.0	<10.0	<10.0	<10.0	<10.0 / <10.0
Methylene Chloride	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0

TABLE 1 (CONTINUED)

JUNE 2013 GROUNDWATER ANALYTICAL RESULTS – VOLATILE ORGANIC COMPOUNDS
FORMER RALSTON DISPOSAL SITE – CEDAR RAPIDS, IOWA

Well ID:	MW-1A	MW-1B	MW-1C	MW-1D	MW-2A ^a	MW-2B	MW-3A	MW-3B	MW-3C	MW-3D ^b
Sample Date:	06/12/13	06/12/13	06/12/13	06/12/13	06/13/13	06/13/13	06/13/13	06/13/13	06/13/13	06/13/13
Compound										
Methyl tert-Butyl Ether (MTBE)	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
Naphthalene	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0	<5.0	<5.0	<5.0	<5.0	<5.0 / <5.0
1,1,2,2-Tetrachloroethane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
Tetrachloroethene	<1.0	2.84	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
Toluene	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	3.17	<1.0 / <1.0
1,1,1-Trichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
1,1,2-Trichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0
Trichloroethene	<1.0	17.8	41.4	3.26	<1.0 / <1.0	<1.0	2,140	315	<1.0	<1.0 / <1.0
Vinyl Chloride	<1.0	<1.0	<1.0	<1.0	<1.0 / <1.0	797	555	2100	4,700	<1.0 / <1.0
Xylenes, Total	<3.0	<3.0	<3.0	<3.0	<3.0 / <3.0	<3.0	<3.0	<3.0	<3.0	<3.0 / <3.0

TABLE 1 (CONTINUED)

JUNE 2013 GROUNDWATER ANALYTICAL RESULTS – VOLATILE ORGANIC COMPOUNDS
FORMER RALSTON DISPOSAL SITE – CEDAR RAPIDS, IOWA

Well ID: MW-3E Sample Date: 06/13/13 Compound	MW-4A 06/11/13	MW-4B 06/11/13	MW-4C 06/11/13	MW-5D 06/12/12	MW-7D 06/12/12	MW-8D 06/11/13	MW-9B 06/12/13	MW-9D 06/12/13	MW-10B 06/12/13	MW-11B 06/12/13
Acetone	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0
Benzene	<0.500	<0.500	<0.500	<0.500	<0.500	<0.500	<0.500	<0.500	<0.500	<0.500
Bromodichloromethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Bromoform	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0
Bromomethane	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0
2-Butanone (MEK)	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0
Carbon Disulfide	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Carbon Tetrachloride	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
Chlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chlorodibromomethane	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0
Chloroethane	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0	<4.0
Chloroform	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Chloromethane	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0
1,2-Dichlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,3-Dichlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,4-Dichlorobenzene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,1-Dichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,2-Dichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,1-Dichloroethene	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0	<2.0
cis-1,2-Dichloroethene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	91.5 B	10.3	<1.0	<1.0
trans-1,2-Dichloroethene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	2.40	<1.0	<1.0	<1.0
1,2-Dichloropropane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
cis-1,3-Dichloropropene	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0
trans-1,3-Dichloropropene	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0
Ethylbenzene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
2-Hexanone	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0
4-Methyl-2-pentanone (MIBK)	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0	<10.0
Methylene Chloride	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0

TABLE 1 (CONTINUED)

JUNE 2013 GROUNDWATER ANALYTICAL RESULTS – VOLATILE ORGANIC COMPOUNDS
FORMER RALSTON DISPOSAL SITE – CEDAR RAPIDS, IOWA

Well ID:	MW-3E	MW-4A	MW-4B	MW-4C	MW-5D	MW-7D	MW-8D	MW-9B	MW-9D	MW-10B	MW-11B
Sample Date:	06/13/13	06/11/13	06/11/13	06/11/13	06/12/12	06/12/12	06/11/13	06/12/13	06/12/13	06/12/13	06/12/13
Compound											
Methyl tert-Butyl Ether (MTBE)	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Naphthalene	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0	<5.0
1,1,2,2-Tetrachloroethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Tetrachloroethene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Toluene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,1,1-Trichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
1,1,2-Trichloroethane	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0
Trichloroethylene	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	2.26	1.77	<1.0	<1.0
Vinyl Chloride	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	<1.0	1.99	<1.0	<1.0	<1.0
Xylenes, Total	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0	<3.0

Notes:

Concentrations are presented in microgram(s) per liter ($\mu\text{g/L}$).

^a Blind duplicate sample collected from MW-2A labeled as MW-2C (duplicate sample indicated second).

^b Blind duplicate sample collected from MW-3D, labeled as MW-1E (duplicate sample indicated second).

< = Less than.

B = Analyte was detected in the associated method blank.

B1 = Analyte was detected in the associated Method Blank. Analyte concentration in the sample is greater than 10x the concentration found in the method blank.

C9 = Calibration verification recovery was outside the method control limits for this analyte. The LCS (laboratory control standard) for this analyte met CCV (continuing calibration verification) acceptance criteria, and was used to validate the batch.

CIN = The percent (%) relative standard deviation (RSD) for this compound was above 15%. The average % RSD for all compounds in the calibration met the 15% criteria specified in EPA Methods 8260B/8270C.

M1 = The MS (matrix spike) and/or MSD (matrix spike duplicate) was outside control limits.