

Solutia Inc.

575 Maryville Centre Drive St. Louis, Missouri 63141

P.O. Box 66760 St. Louis, Missouri 63166-6760 Tel 314-674-1000

April 27, 2010

Mr. Kenneth Bardo - LU-9J U.S. EPA Region V Corrective Action Section 77 West Jackson Boulevard Chicago, IL 60604-3507 **VIA FEDEX** 

Re:

PCB Groundwater Quality Assessment Program

1<sup>st</sup> Quarter 2010 Data Report

Solutia Inc., W. G. Krummrich Plant, Sauget, IL

Dear Mr. Bardo:

Enclosed please find the PCB Groundwater Quality Assessment Program 1<sup>st</sup> Quarter 2010 Data Report for Solutia Inc.'s W. G. Krummrich Plant, Sauget, IL.

If you have any questions or comments regarding this report, please contact me at (314) 674-3312 or gmrina@solutia.com

Sincerely,

Gerald M. Rinaldi

Manager, Remediation Services

4th like

Enclosure

cc: Distribution List

#### **DISTRIBUTION LIST**

PCB Groundwater Quality Assessment Program 1<sup>st</sup> Quarter 2010 Data Report Solutia Inc., W. G. Krummrich Plant, Sauget, IL

#### **USEPA**

Stephanie Linebaugh USEPA Region 5 - SR6J, 77 West Jackson Boulevard, Chicago, IL 60604

#### **IEPA**

James Moore IEPA Bureau of Land, 1021 North Grand Avenue East, Springfield, IL 62706

#### Booz Allen Hamilton

Dan Briller Booz Allen Hamilton, 8283 Greensboro Drive, McLean, VA 22102

#### Solutia

Justin Prien 500 Monsanto Avenue, Sauget, IL 62206-1198

## 1 <sup>S T</sup> QUARTER 2010 DATA REPORT

# PCB GROUNDWATER QUALITY ASSESSMENT PROGRAM

SOLUTIA INC. W.G. KRUMMRICH FACILITY SAUGET, ILLINOIS

Prepared for Solutia Inc. 575 Maryville Centre Drive St. Louis, Missouri 63141

April 2010



URS Corporation 1001 Highland Plaza Drive West, Suite 300 St. Louis, MO 63110 (314) 429-0100 Project # 21562401.00002

4.0	INITOON	ICTION
1.0	INTROD	JCTION1
2.0	FIELD PI	ROCEDURES1
3.0	LABORA	TORY PROCEDURES3
4.0	QUALITY	7 ASSURANCE
5.0	OBSERV	'ATIONS4
6.0	REFERE	NCES5
List of	Figures	
Figure Figure Figure Figure Figure	2 3 4	Site Location Map Former PCB Manufacturing Area Monitoring Well Locations Potentiometric Surface Map – Middle / Deep Hydrogeologic Unit PCB Results - SHU Wells PCB Results – MHU / DHU Wells
List of	Tables	
Table 1 Table 2 Table 3 Table 4 Table 5 Table 6 Table 7	2 3 1 5 5	Monitoring Well Gauging Information Groundwater & DNAPL Analytical Detections Monitoring Well PMA MW-1M Mann-Kendall Trend Analysis Monitoring Well PMA MW-2M Mann-Kendall Trend Analysis Monitoring Well PMA MW-3S Mann-Kendall Trend Analysis Monitoring Well PMA MW-3M Mann-Kendall Trend Analysis Monitoring Well PMA MW-4D Mann-Kendall Trend Analysis Monitoring Well PMA MW-6D Mann-Kendall Trend Analysis
List of	Appendic	ees
Append Append Append	dix B dix C	Groundwater Purging and Sampling Forms Chains-of-Custody Quality Assurance Report Groundwater Analytical Results (with Data Review Sheets)

April 2010 i

#### 1.0 INTRODUCTION

This report presents the results of the 1st Quarter 2010 (1Q10) sampling event performed at the Solutia Inc. (Solutia) W.G. Krummrich Facility located in Sauget, Illinois (Site). This sampling event was conducted in accordance with the Revised PCB Groundwater Quality Assessment Program Work Plan (Solutia 2009). The Site location map is presented in **Figure 1**.

The PCB Groundwater Quality Assessment Program well network consists of ten monitoring wells, as follows (**Figure 2**):

- Two source area wells, PMA-MW-4S and PMA-MW-4D, are screened in the Shallow Hydrogeologic Unit (SHU) (designated with an "S") and Deep Hydrogeologic Unit (DHU) (designated with a "D"), respectively.
- Three well clusters (PMA-MW-1S/M, PMA-MW-2S/M and PMA-MW-3S/M) are located down-gradient of the source area. These clusters include wells screened in the SHU and Middle Hydrogeologic Unit (MHU) (designated with an "M").
- Two individual wells designated PMA-MW-5M and PMA-MW-6D are located further down-gradient of the source area, with PMA-MW-5M screened in the MHU and PMA-MW-6D screened in the DHU.

Groundwater samples were collected from the ten monitoring wells during the 1Q10 sampling event.

Field sampling activities were conducted in accordance with the procedures outlined in the Revised PCB Groundwater Quality Assessment Program Work Plan, including the collection of appropriate quality assurance and quality control (QA/QC) samples. The following section summarizes the field investigative procedures.

#### 2.0 FIELD PROCEDURES

URS Corporation (URS) conducted the 1Q10 PCB Groundwater Quality Assessment Program field activities between February 12 and 23, 2010.

**Groundwater Level Measurements** – An oil/water interface probe was used to measure depth to static groundwater levels and determine the presence of non-aqueous phase liquids (NAPL) in the PCB Groundwater Quality Assessment Program well network. Depth to groundwater measurements were collected from accessible existing wells (i.e., GM-, K-, PSMW- and PMA-series) and piezometers clusters (installed for the Sauget Area 2 RI/FS and WGK CA-750 Environmental Indicator projects) specified in the Revised PCB Groundwater Quality Assessment Program Work Plan.

Well gauging information for the 1Q10 event is presented in **Table 1**. As the middle and deep hydrogeologic units are the primary migration pathway for constituents present in groundwater at the WGK Facility, a groundwater potentiometric surface map based on water level data from wells screened in the MHU and DHU is presented as **Figure 3**.

**Groundwater Sampling** - Low-flow sampling techniques were used for groundwater sample collection. At each monitoring well, disposable, low-density polyethylene tubing was attached to a submersible pump, which was then lowered into the well to the middle of the screened interval. Monitoring wells were purged at a rate no more than 400 mL/minute to minimize drawdown. If significant drawdown occurred, flow rates were reduced.

Drawdown was measured periodically throughout purging to ensure that it did not exceed 25% of the distance between the pump intake and the top of the screen. Once the flow rate and drawdown were stable, field measurements were collected approximately every three to five minutes. Purging of a well was considered complete when the following water quality parameters remained stable over three consecutive flow-thru cell volumes:

Parameter	Stabilization Guidelines
Dissolved Oxygen (DO)	+/- 10% or +/-0.2 mg/L, whichever is greatest
Oxidation-Reduction Potential (ORP)	+/- 20 mV
pH	+/- 0.2 units
Specific Conductivity	+/- 3%

Sampling commenced upon completion of purging. Prior to sample collection, the flow-thru cell was bypassed to allow for collection of uncompromised groundwater. Consistent with the work plan, samples were collected at a flow rate less than or equal to the rate at which stabilization was achieved.

Quality Assurance/Quality Control (QA/QC) samples consisting of analytical duplicates (AD) and equipment blanks (EB) were collected at a rate of 10% and matrix spike/matrix spike duplicates (MS/MSD) were collected at a rate of 5%, complying with the work plan. All samples were submitted to TestAmerica for PCB analysis.

Each sample was labeled immediately following collection. The sample identification system used for each sample involved the following nomenclature "PMA-MW#-MMYY-QAC" where:

- PMA-MW# Monitoring Well Location (PCB Manufacturing Area (PMA)) and Number
- **MMYY** Month and year of sampling quarter, e.g.: February (first quarter), 2010 (0210)
- QAC denotes QA/QC samples (when applicable):
  - o **EB** equipment blank
  - AD analytical duplicate
  - MS or MSD Matrix Spike or Matrix Spike Duplicate

Upon collection and labeling, sample containers were immediately placed inside an iced cooler, packed in such a way as to help prevent breakage and maintain inside temperature at or below approximately 4°C. Field personnel recorded the project identification and number, sample description/location, required analysis, date and time of sample collection, type and matrix of sample, number of sample containers, analysis requested/comments, and sampler signature/date/time, with permanent ink on the chain-of-custody (COC). Prior to shipment, coolers were sealed between the lid and sides of the cooler with a custody seal, and then shipped to TestAmerica in Savannah, Georgia by means of overnight delivery service (FedEx). Field sampling data sheets are included in **Appendix A**, COC forms are included in **Appendix B**.

#### 3.0 LABORATORY PROCEDURES

Samples were analyzed by TestAmerica for PCBs using Method 680.

#### 4.0 QUALITY ASSURANCE

Analytical data were reviewed for quality and completeness, as described in the Revised PCB Groundwater Quality Assessment Work Plan (Solutia 2009). Data qualifiers were added, as appropriate, and are included on the data tables and the laboratory result pages. The Quality Assurance report is included as **Appendix C**. Laboratory reports and data validation review sheets are included in **Appendix D**.

A total of 14 samples (ten investigative groundwater samples, one field duplicate, one MS/MSD pair, one equipment blank) were prepared and analyzed by TestAmerica for PCBs. Results for the various analyses were submitted as sample delivery group (SDG) KPM037.

The samples contained in SDG KPM037 are listed below:

#### <u>KPM037</u>

PMA-MW-1S-0210 PMA-MW-1M-0210 PMA-MW-2M-0210 PMA-MW-2M-0210-AD PMA-MW-2S-0210-EB PMA-MW-2S-0210 PMA-MW-5M-0210 PMA-MW-6D-0210 PMA-MW-3M-0210 PMA-MW-3S-0210 PMA-MW-4D-0210 PMA-MW-4S-0210

Evaluation of the analytical data followed procedures outlined in the USEPA Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review, (USEPA 2008) and the Revised PCB Groundwater Quality Assessment Work Plan (Solutia 2009). Based on the above mentioned criteria, results reported for the analyses performed were accepted for their intended use. Acceptable levels of accuracy and precision, based on MS/MSD, LCS, surrogate and field duplicate data were achieved for these SDGs to meet the project objectives. Completeness, which is defined to be the percentage of analytical results which are judged to be valid, including estimated detect/nondetect (J/UJ) data was 100 percent.

#### 5.0 OBSERVATIONS

This section presents a brief summary of the groundwater analytical results from the 1Q10 PCB Groundwater Quality Assessment sampling event. A summary of the laboratory results is provided in **Table 2** and the entire laboratory data package is provided in **Appendix D**.

#### **Shallow Hydrogeologic Unit**

PCBs were detected in the source area SHU monitoring well PMA-MW-4S, at an estimated concentration of 200.55  $\mu$ g/L. Historically, measurable DNAPL has been observed in PMA-MW-4S during previous sampling events.PCBs were not detected in the three down-gradient PCB Groundwater Quality Assessment Program SHU monitoring wells. Such data indicate that PCBs in the SHU are attenuating over the 300 to 400 ft distance between PMA-MW-4S and the three downgradient monitoring wells. PCB sampling results for the SHU are presented on **Figure 4**.

#### Middle/Deep Hydrogeologic Unit

Laboratory analytical results for monitoring well PMA-MW-4D, located in the Former PCB Manufacturing Area, indicated a total PCB concentration of 0.54  $\mu$ g/L for the 1Q10 sampling event. PCBs were also detected in four of the five downgradient monitoring wells at concentrations of 0.2  $\mu$ g/L (PMA-MW-1M), 2.4  $\mu$ g/L (PMA-MW-2M/duplicate), estimated 0.87  $\mu$ g/L (PMA-MW-3M), and 0.19  $\mu$ g/L (PMA-MW-6D). PCBs were not detected in the groundwater sample collected from monitoring well PMA-MW-5M. **Figure 5** displays the 1Q10 PCB sampling results for the MHU/DHU.

The 1Q10 sampling event was the seventh event conducted under the PCB Groundwater Quality Assessment Program. Mann-Kendall trend analyses of total PCBs in unfiltered samples of groundwater from monitoring wells within (PMA-MW-4D) or downgradient of (PMA-MW-1M, -2M, -3S, -3M, and -6D) the former PCB Manufacturing Area are presented in **Tables 3** through **8**. The data appear to exhibit an upward trend in concentrations at monitoring well PMA-MW-4D at this time, but no trends at any of the other wells.


After eight quarters of sampling under the PCB Groundwater Quality Assessment Program, the Mann-Whitney U Test will be performed to determine whether or not concentrations in the second four quarters were higher or lower than the first four quarters. Linear regression analysis will be done for the eight quarters of data provided the data distribution allows the use of parametric statistical analysis.


#### 6.0 REFERENCES


Solutia Inc, 2009. Revised PCB Groundwater Quality Assessment Program Work Plan, W.G. Krummrich Facility, Sauget, IL, Prepared by URS Corporation, May 2009.


U.S. Environmental Protection Agency (USEPA), 2008 Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review.


# **Figures**

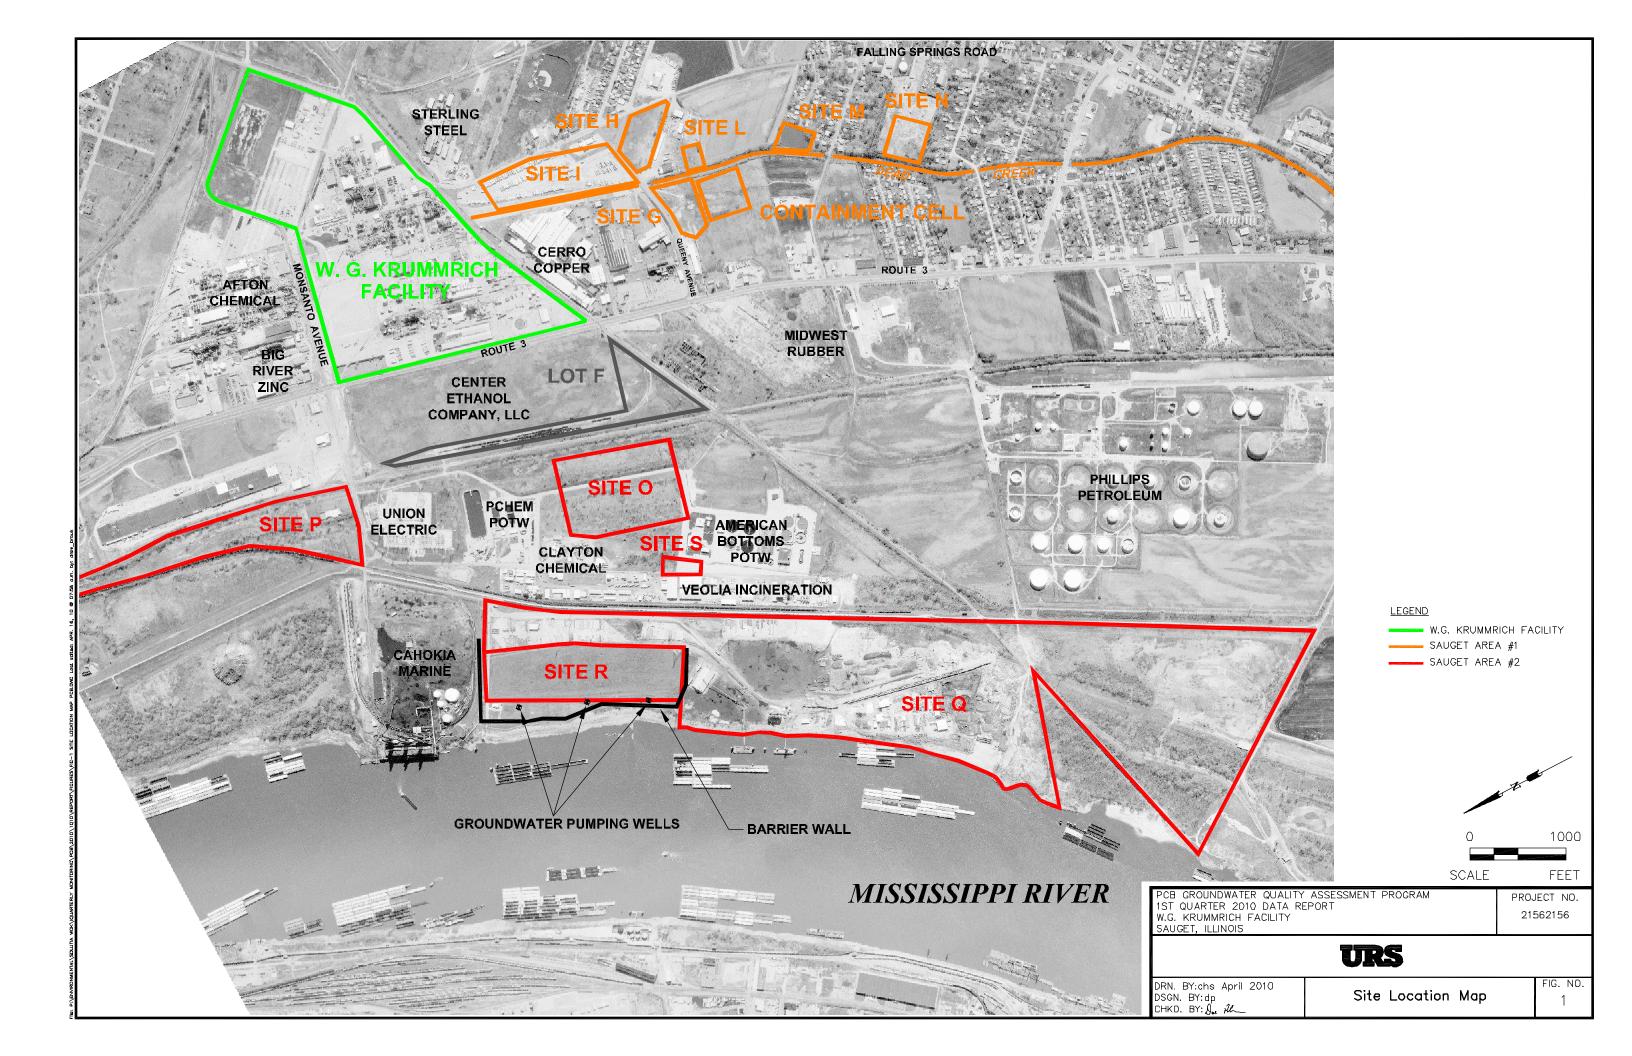

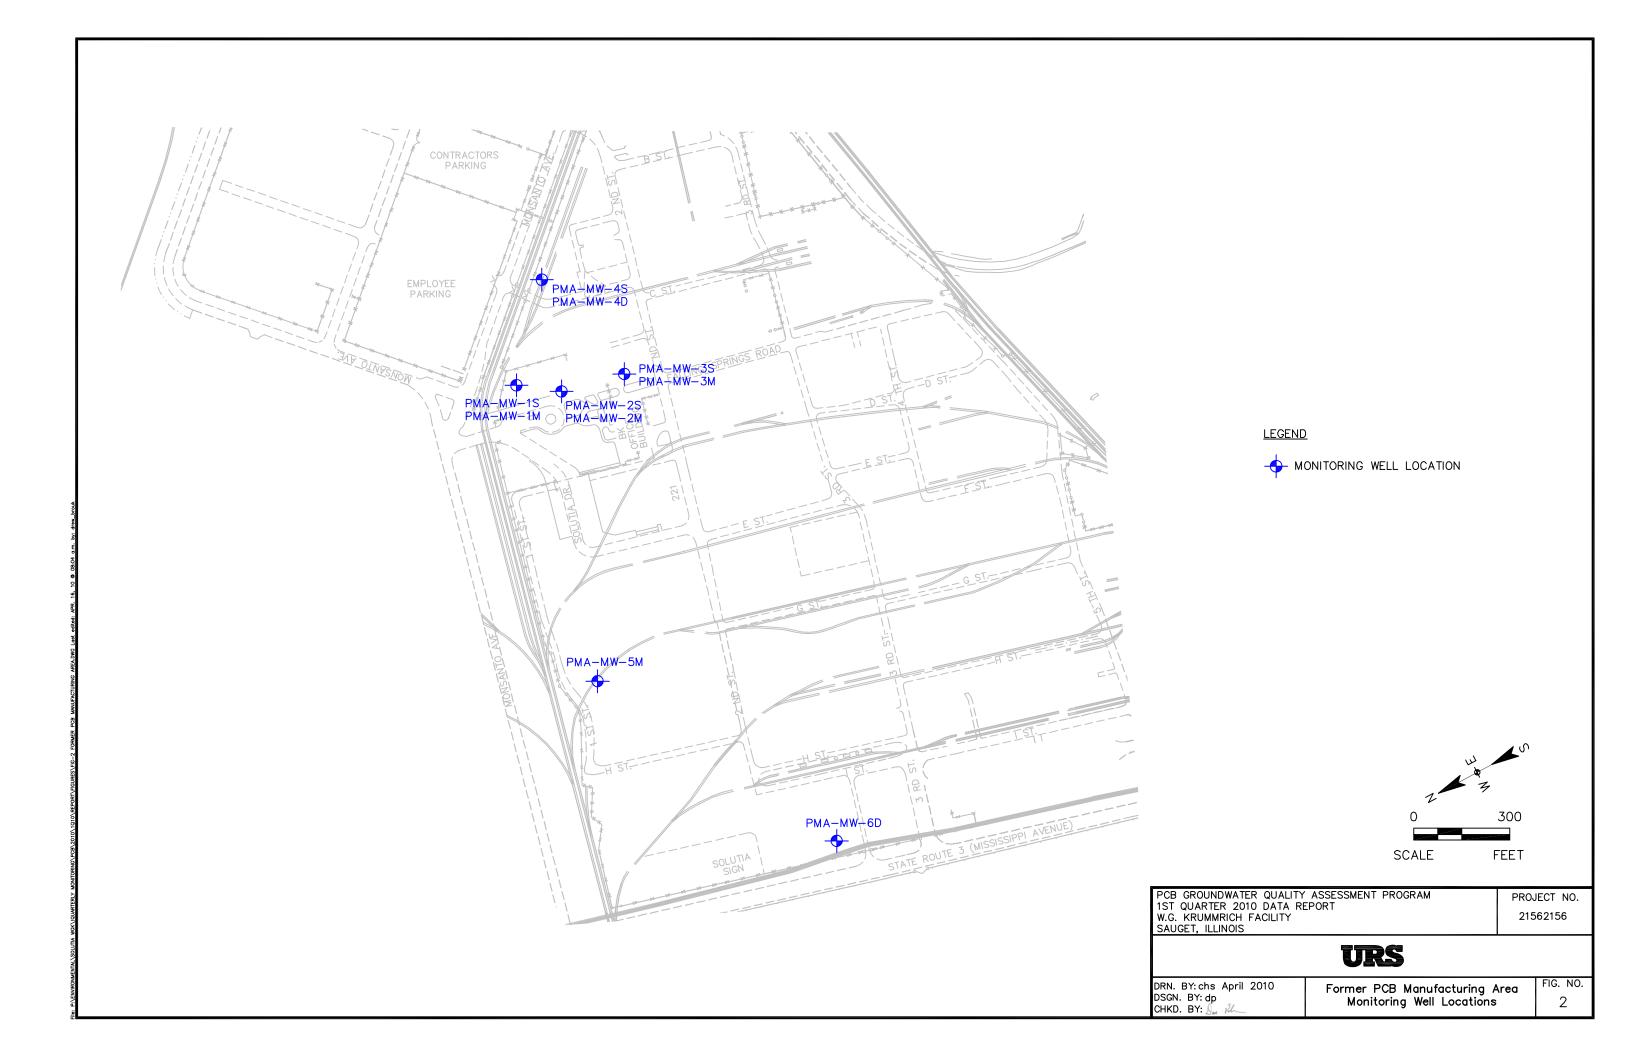

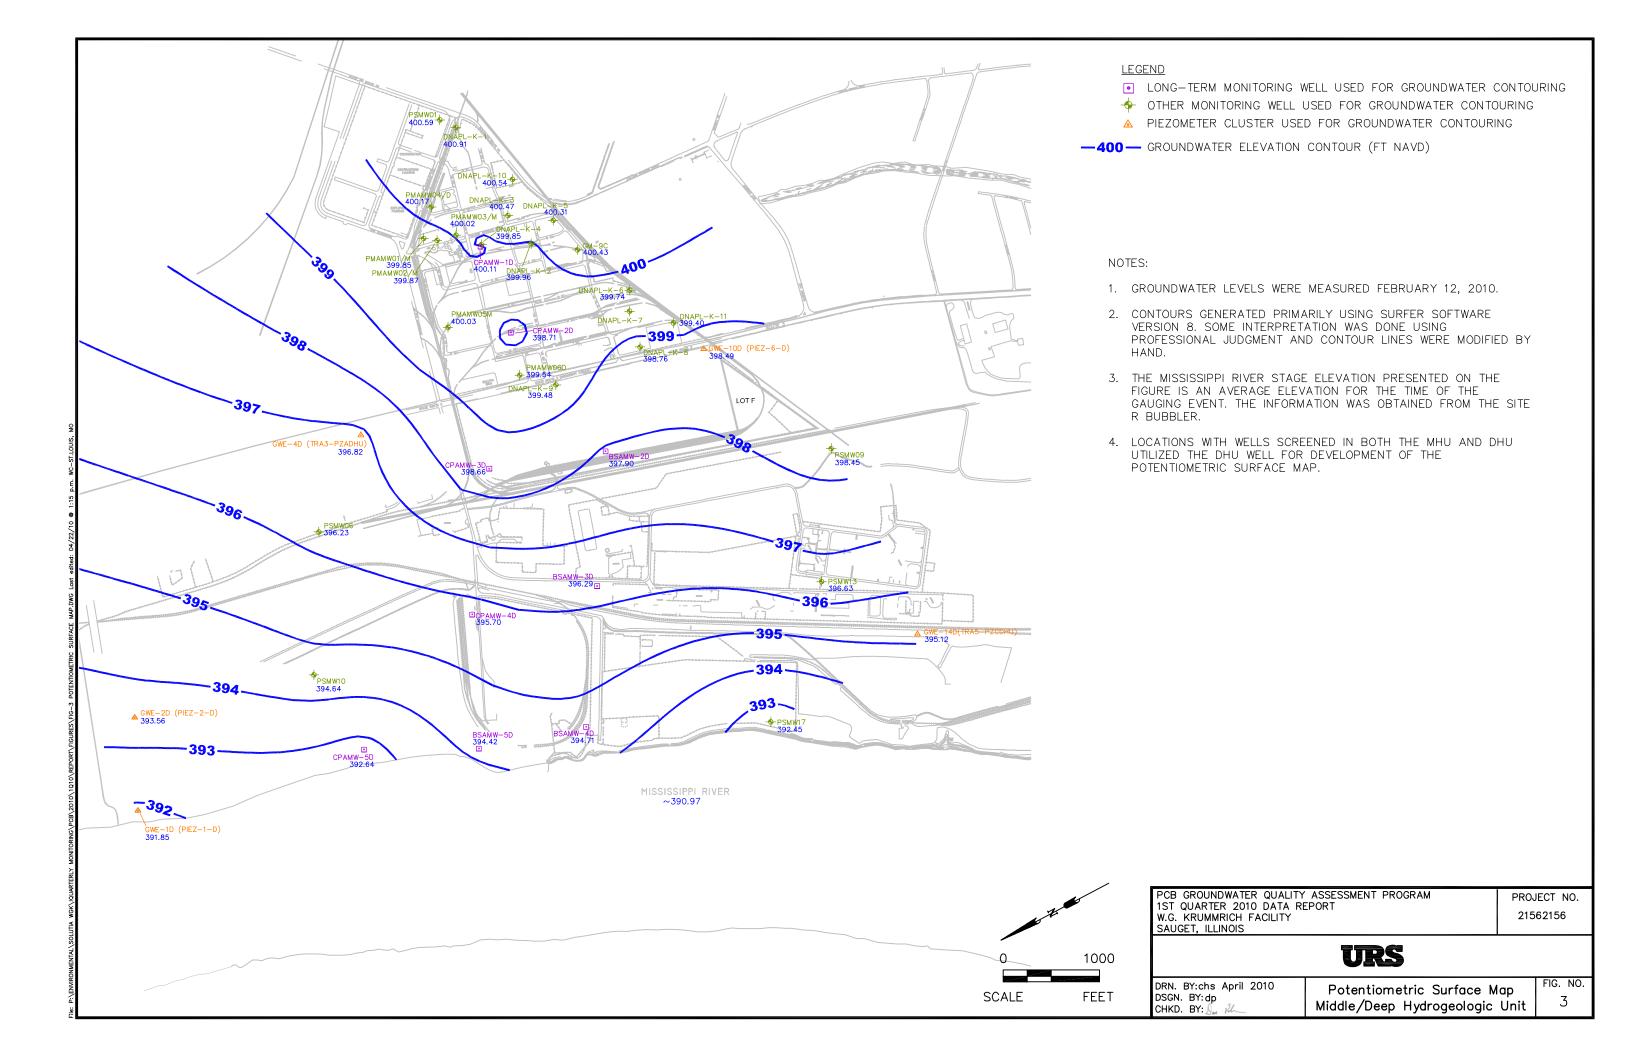

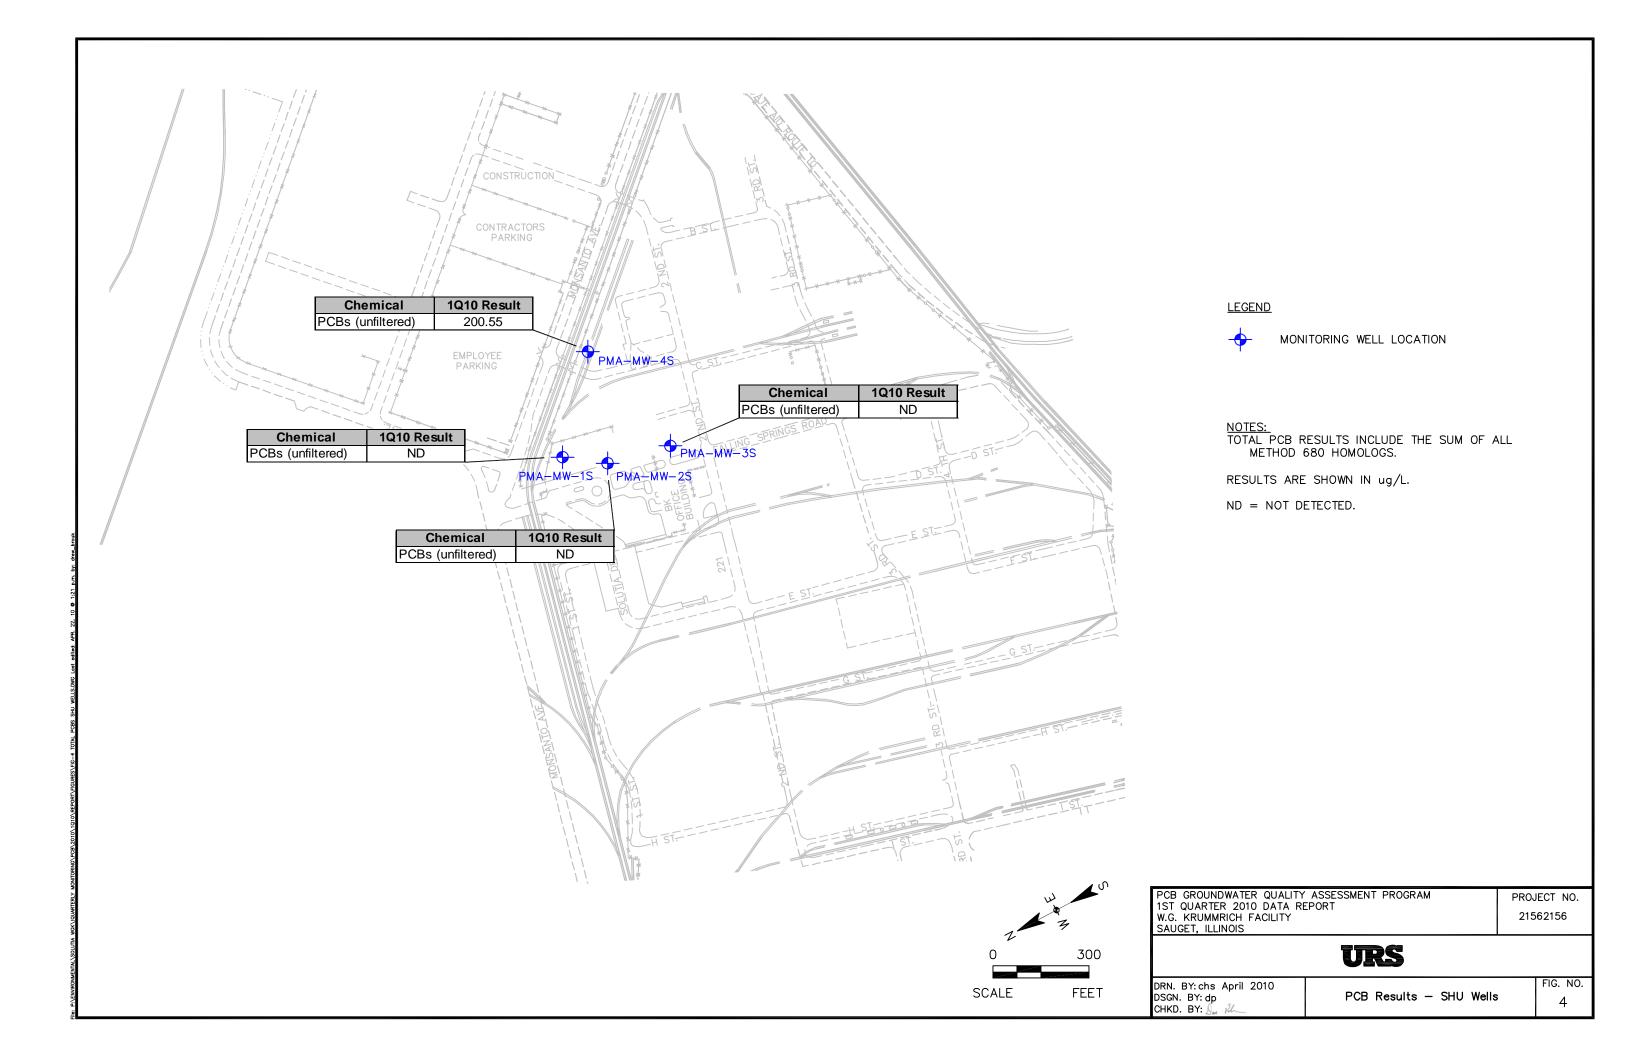

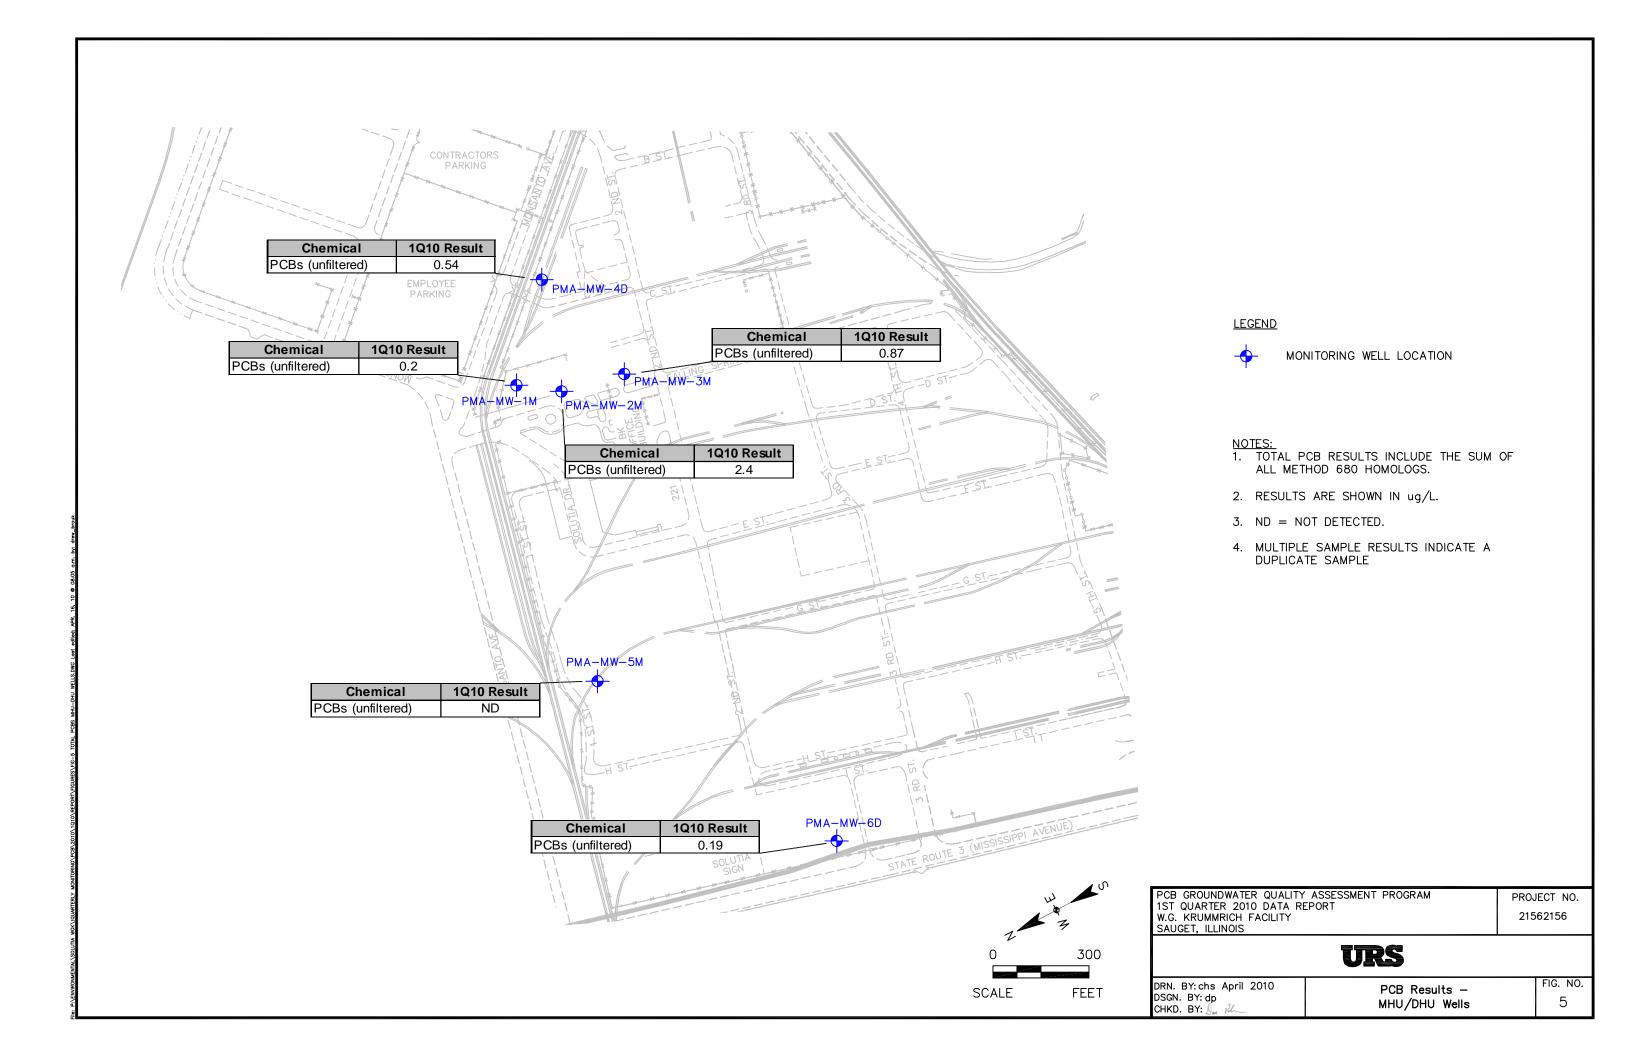

### **Tables**

Table 1
Monitoring Well Gauging Information

			Construct	ion Details				February	/ 12, 2010	
Well ID	Ground Elevation (feet)*	Casing Elevation* (feet)	Depth to Top of Screen (feet bgs)	Depth to Bottom of Screen (feet bgs)	Top of Screen Elevation* (feet)	Bottom of Screen Elevation* (feet)	Depth to Water (feet btoc)	Product Thickness (feet)	Depth to Bottom (feet btoc)	Water Elevation* (feet)
Shallow Hydrogeologic U	Jnit (SHU 395-	-380 feet NAV		, ,	` '					
PMA-MW-1S	410.30	410.06	20.18	25.18	390.12	385.12	9.85		24.91	400.21
PMA-MW-2S	412.27	411.66	22.94	27.94	389.33	384.33	11.78		27.33	399.88
PMA-MW-3S	412.37	412.06	22.71	27.71	389.66	384.66	12.02		27.38	400.04
PMA-MW-4S	411.09	410.43	20.99	25.99	390.10	385.10	10.35		25.35	400.08
Middle Hydrogeologic Ur	nit (MHU 380-3	350 feet NAVD	88)							
PMA-MW-1M	410.32	410.08	54.54	59.54	355.78	350.78	10.23	-	59.61	399.85
PMA-MW-2M	412.26	411.93	56.87	61.87	355.39	350.39	12.06	-	61.53	399.87
PMA-MW-3M	412.36	412.10	57.07	62.07	355.29	350.29	12.08		61.80	400.02
PMA-MW-5M	411.27	410.97	52.17	57.17	359.10	354.10	10.94	-	56.97	400.03
PSMW-1	409.37	412.59	37.78	42.78	371.59	366.59	12.00	-	46.04	400.59
Deep Hydrogeologic Unit	(DHU 350 fee	et NAVD 88 - E	Bedrock)							
BSA-MW-2D	412.00	415.13	68.92	73.92	343.08	338.08	17.23		77.02	397.90
BSA-MW-3D	412.91	415.74	107.02	112.02	305.89	300.89	19.45		114.80	396.29
BSA-MW-4D	425.00	424.69	118.54	123.54	306.46	301.46	29.98		123.18	394.71
BSA-MW-5D	420.80	420.49	115.85	120.85	304.95	299.95	26.07		120.95	394.42
CPA-MW-1D	408.62	408.32	66.12	71.12	342.50	337.50	8.21		70.73	400.11
CPA-MW-2D	408.51	408.20	99.96	104.96	308.55	303.55	9.49		104.65	398.71
CPA-MW-3D	410.87	410.67	108.20	113.20	302.67	297.67	12.01		112.84	398.66
CPA-MW-4D	421.57	421.20	116.44	121.44	305.13	300.13	25.50		121.00	395.70
CPA-MW-5D	411.03	413.15	107.63	112.63	303.40	298.40	20.51		114.67	392.64
DNAPL-K-1	413.07	415.56	108.20	123.20	304.87	289.87	14.65		123.16	400.91
DNAPL-K-2	407.94	407.72	97.63	112.63	310.31	295.31	7.76		112.36	399.96
DNAPL-K-3	412.13	411.91	104.80	119.80	307.33	292.33	11.44		119.25	400.47
DNAPL-K-4	409.48	409.15	102.55	117.55	306.93	291.93	9.30		115.59	399.85
DNAPL-K-5	412.27	411.91	102.15	117.15	310.12	295.12	11.60		116.48	400.31
DNAPL-K-6	410.43	410.09	102.47	117.47	307.96	292.96	10.35		116.94	399.74
DNAPL-K-7	408.32	407.72	100.40	115.40	307.92	292.92	NG		NG	NG
DNAPL-K-8	408.56	411.38	102.65	117.65	305.91	290.91	12.62		117.59	398.76
DNAPL-K-9	406.45	405.97	97.42	112.42	309.03	294.03	6.49		111.23	399.48
DNAPL-K-10	413.50	413.25	105.43	120.43	308.07	293.07	12.71		120.27	400.54
DNAPL-K-11	412.20	411.78	105.46	120.46	306.74	291.74	12.38		120.25	399.40
GM-9C	409.54	411.21	88.00	108.00	321.54	301.54	10.78		23.75	400.43

W.G. Krummrich Facility - Sauget, Illinois PCB Groundwater Quality Assessment Program

Table 1
Monitoring Well Gauging Information

			Construct	ion Details				February	y 12, 2010	
Well ID	Ground Elevation (feet)*	Casing Elevation* (feet)	Depth to Top of Screen (feet bgs)	Depth to Bottom of Screen (feet bgs)	Top of Screen Elevation* (feet)	Bottom of Screen Elevation* (feet)	Depth to Water (feet btoc)	Product Thickness (feet)	Depth to Bottom (feet btoc)	Water Elevation* (feet)
<b>Deep Hydrogeologic Unit</b>	(DHU 350 fee	et NAVD 88 - E	Bedrock) (con	tinued)						
GWE-1D (PIEZ-1D)	412.80	415.60	117.00	127.00	295.80	285.80	23.75	-	128.53	391.85
GWE-2D (PIEZ-2D)	417.45	417.14	127.00	137.00	290.45	280.45	23.58	1	136.67	393.56
GWE-4D (TRA3-PZADHU)	406.05	405.74	74.00	80.00	332.05	326.05	8.92		78.78	396.82
GWE-10D (PIEZ-6D)	410.15	412.87	102.50	112.50	307.65	297.65	14.38	1	114.85	398.49
GWE-14D (TRA5-PZCDHU)	420.47	422.90	90.00	96.00	330.47	324.47	27.78	1	98.78	395.12
PMA-MW-4D	411.22	410.88	68.84	73.84	342.38	337.38	10.71		73.35	400.17
PMA-MW-6D	407.63	407.32	96.49	101.49	311.14	306.14	7.78	1	101.29	399.54
PSMW-6	404.11	406.63	99.80	104.80	304.31	299.31	10.40	1	109.85	396.23
PSMW-9	403.92	403.52	100.40	105.40	303.52	298.52	5.07	-	105.13	398.45
PSMW-10	409.63	412.18	101.23	106.23	308.40	303.40	17.54		111.28	394.64
PSMW-13	405.80	405.53	106.08	111.08	299.72	294.72	8.90	-	110.13	396.63
PSMW-17	420.22	423.26	121.25	126.25	298.97	293.97	30.81		134.84	392.45

#### Notes:

bgs - below ground surface

btoc - Below top of casing

<sup>\* -</sup> Elevation based upon North American Vertical Datum (NAVD) 88 datum

Table 2 **Groundwater Analytical Detections** 

Sample ID	Sample Date	Units	Monochlorobiphenyl	Dichlorobiphenyl	Trichlorobiphenyl	Tetrachlorobiphenyl	Pentachlorobiphenyl	Hexachlorobiphenyl	Heptachlorobiphenyl	Octachlorobiphenyl	Nonachlorobiphenyl	Decachlorobiphenyl
Shallow Hydrologic Unit												
PMA-MW-1S-0210	2/22/2010	μg/L	< 0.097	< 0.097	< 0.097	<0.19	<0.19	<0.19	<0.29	<0.29	< 0.49	< 0.49
PMA-MW-2S-0210	2/22/2010	μg/L	< 0.095	<0.095	< 0.095	<0.19	<0.19	<0.19	<0.29	<0.29	<0.48	<0.48
PMA-MW-3S-0210	2/23/2010	μg/L	< 0.095	< 0.095	< 0.095	<0.19	<0.19	<0.19	<0.29	<0.29	<0.48	<0.48
PMA-MW-4S-0210	2/23/2010	μg/L	1.4 J	6.8 J	14 D J	52 J	34 J	49 D J	33 J	8.3 J	1.2 J	0.85 J
Middle / Deep Hydrologic U	Init											
PMA-MW-1M-0210	2/22/2010	μg/L	0.2	< 0.094	< 0.094	<0.19	<0.19	<0.19	<0.28	<0.28	< 0.47	<0.47
PMA-MW-2M-0210	2/22/2010	μg/L	2.4	<0.094	< 0.094	<0.19	<0.19	<0.19	<0.28	<0.28	< 0.47	<0.47
PMA-MW-2M-0210-AD	2/22/2010	μg/L	2.4	< 0.095	< 0.095	<0.19	<0.19	<0.19	<0.29	<0.29	<0.48	<0.48
PMA-MW-3M-0210	2/23/2010	μg/L	0.87 J	<0.094	<0.094	<0.19	<0.19	<0.19	<0.28	<0.28	<0.47	<0.47
PMA-MW-4D-0210	2/23/2010	μg/L	0.26	0.28	<0.094	<0.19	<0.19	<0.19	<0.28	<0.28	<0.47	<0.47
PMA-MW-5M-0210	2/22/2010	μg/L	<0.095	<0.095	<0.095	<0.19	<0.19	<0.19	<0.29	<0.29	<0.48	<0.48
PMA-MW-6D-0210	2/23/2010	μg/L	0.19	<0.095	<0.095	<0.19	<0.19	<0.19	<0.29	<0.29	<0.48	<0.48

#### Notes:

μg/L = micrograms per liter

< = Result is non-detect, less than the reporting limit

AD = Analytical Duplicate

J = Estimated value

**BOLD** indicates concentration greater than the reporting limit

Table 3
Monitoring Well PMA MW-1M Mann-Kendall Trend Analysis

	W.G.Krummrich Facility PCB Mfg. Area Monitoring Well MW-1M Mann-Kendall Trend Analysis																
	Event 1	Event 2	Event 3	Event 4	Event 5	Event 6	Event 7	Event 8	Event 9	Event 10	Event 11	Event 12	Event 13	Event 14	Event 15	Event 16	Row
	2Q06	3Q06	4Q06	1Q07	2Q07	3Q07	4Q07	1Q08	2Q08	3Q08	4Q08	1Q09	2Q09	3Q09	4Q09	1Q10	Total
Total PCBs, µg/L	ND	0.24	0.21	0.17	0.26	0.29	48	ND	0.18	0.38	0.26	0.16	0.21	0.27	0.27	0.20	
Compare to Event 1		1	1	1	1	1	1	NA	1	1	1	1	1	1	1	1	14
Compare to Event 2			-1	-1	1	1	1	-1	-1	1	1	-1	-1	1	1	-1	0
Compare to Event 3				-1	1	1	1	-1	-1	1	1	-1	0	1	1	-1	2
Compare to Event 4			·		1	1	1	-1	1	1	1	-1	1	1	1	1	8
Compare to Event 5				_		1	1	-1	-1	1	0	-1	-1	1	1	-1	0
Compare to Event 6							1	-1	-1	1	-1	-1	-1	-1	-1	-1	-6
Compare to Event 7								-1	-1	-1	-1	-1	-1	-1	-1	-1	-9
Compare to Event 8									1	1	1	1	1	1	1	1	8
Compare to Event 9										1	1	-1	1	1	1	1	5
Compare to Event 10											-1	-1	-1	-1	-1	-1	-6
Compare to Event 11												-1	-1	1	1	-1	-1
Compare to Event 12													1	1	1	1	4
Compare to Event 13														1	1	-1	1
Compare to Event 14															0	-1	-1
Compare to Event 15																-1	-1

Mann-Kendall Statistic (S)

18

90 % Confidence Mann-Kendall Statistic

30

Table 4
Monitoring Well PMA MW-2M Mann-Kendall Trend Analysis

			W.G.	Krummric	h Facility	PCB Mfg	. Area Mo	nitoring W	ell MW-2l	M Mann-K	endall Tre	nd Analys	sis				
	Event 1	Event 2	Event 3	Event 4	Event 5	Event 6	Event 7	Event 8	Event 9		Event 11					Event 16	Row
	2Q06	3Q06	4Q06	1Q07	2Q07	3Q07	4Q07	1Q08	2Q08	3Q08	4Q08	1Q09	2Q09	3Q09	4Q09	1Q10	Total
Total PCBs, µg/L	2.3	2.4	2.8	2.1	3.3	2.5	3.1	1.7	3.0	4.3	2.5	2.9	4.14	3.1	2.7	2.4	
Compare to Event 1		1	1	-1	1	1	1	-1	1	1	1	1	1	1	1	1	11
Compare to Event 2			1	-1	1	1	1	-1	1	1	1	1	1	1	1	0	9
Compare to Event 3				-1	1	-1	1	-1	1	1	-1	1	1	1	-1	-1	1
Compare to Event 4			·		1	1	1	-1	1	1	1	1	1	1	1	1	10
Compare to Event 5				·		-1	-1	-1	-1	1	-1	-1	1	-1	-1	-1	-7
Compare to Event 6							1	-1	1	1	0	1	1	1	1	-1	5
Compare to Event 7							•	-1	-1	1	-1	-1	1	0	-1	-1	-4
Compare to Event 8									1	1	1	1	1	1	1	1	8
Compare to Event 9										1	-1	-1	1	1	-1	-1	-1
Compare to Event 10											-1	-1	-1	-1	-1	-1	-6
Compare to Event 11												1	1	1	1	-1	3
Compare to Event 12													1	1	-1	-1	0
Compare to Event 13														-1	-1	-1	-3
Compare to Event 14														<del></del>	-1	-1	-2
Compare to Event 15																-1	-1

Mann-Kendall Statistic (S)

23

90 % Confidence Mann-Kendall Statistic

30

Table 5
Monitoring Well PMA MW-3S Mann-Kendall Trend Analysis

			W.G.	Krummrio	h Facility	PCB Mfg	. Area Mo	nitoring W	ell MW-3	S Mann-K	endall Tre	nd Analys	is				
	Event 1	Event 2	Event 3	Event 4	Event 5	Event 6	Event 7	Event 8	Event 9	Event 10	Event 11	Event 12	Event 13	Event 14	Event 15	Event 16	Row
	2Q06	3Q06	4Q06	1Q07	2Q07	3Q07	4Q07	1Q08	2Q08	3Q08	4Q08	1Q09	2Q09	3Q09	4Q09	1Q10	Total
Total PCBs, µg/L	0.66	0.32	0.2	0.35	8.0	0.3	0.21	0.25	0.64	0.26	0.24	0.79	ND	0.34	2.0	ND	
Compare to Event 1		-1	-1	-1	1	-1	-1	-1	-1	-1	-1	1	-1	-1	1	-1	-9
Compare to Event 2			-1	1	1	-1	-1	-1	1	-1	-1	1	-1	1	1	-1	-2
Compare to Event 3				1	1	1	1	1	1	1	1	1	-1	1	1	-1	9
Compare to Event 4			·		1	-1	-1	-1	1	-1	-1	1	-1	-1	1	-1	-4
Compare to Event 5				_		-1	-1	-1	-1	-1	-1	-1	-1	-1	1	-1	-9
Compare to Event 6					,		-1	-1	1	-1	-1	1	-1	1	1	-1	-2
Compare to Event 7								1	1	1	1	1	-1	1	1	-1	5
Compare to Event 8									1	1	-1	1	-1	1	1	-1	2
Compare to Event 9										-1	-1	1	-1	-1	1	-1	-3
Compare to Event 10											-1	1	-1	1	1	-1	0
Compare to Event 11												1	-1	1	1	-1	1
Compare to Event 12													-1	-1	1	-1	-2
Compare to Event 13														1	1	NA	2
Compare to Event 14															1	-1	0
Compare to Event 15																-1	-1

Mann-Kendall Statistic (S) -13

90 % Confidence Mann-Kendall Statistic -30

Table 6
Monitoring Well PMA MW-3M Mann-Kendall Trend Analysis

			W.G.	Krummric	h Facility	PCB Mfg	. Area Mo	nitoring W	ell MW-3I	M Mann-K	endall Tre	nd Analys	sis				
	Event 1	Event 2	Event 3	Event 4	Event 5	Event 6	Event 7	Event 8	Event 9		Event 11					Event 16	Row
	2Q06	3Q06	4Q06	1Q07	2Q07	3Q07	4Q07	1Q08	2Q08	3Q08	4Q08	1Q09	2Q09	3Q09	4Q09	1Q10	Total
Total PCBs, µg/L	5.18	1.9	ND	0.77	ND	0.86	0.76	0.39	0.92	1.3	0.71	1.4	1.3	0.85	0.85	0.87	
Compare to Event 1		-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-15
Compare to Event 2			-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-14
Compare to Event 3				1	NA	1	1	1	1	1	1	1	1	1	1	-1	10
Compare to Event 4			·		-1	1	-1	-1	1	1	-1	1	1	1	1	1	4
Compare to Event 5						1	1	1	1	1	1	1	1	1	1	1	11
Compare to Event 6					·		-1	-1	1	1	-1	1	1	-1	-1	1	0
Compare to Event 7							•	-1	1	1	-1	1	1	1	1	1	5
Compare to Event 8									1	1	1	1	1	1	1	1	8
Compare to Event 9										1	-1	1	1	-1	-1	-1	-1
Compare to Event 10											-1	1	1	-1	-1	-1	-2
Compare to Event 11												1	1	1	1	1	5
Compare to Event 12													-1	-1	-1	-1	-4
Compare to Event 13														-1	-1	-1	-3
Compare to Event 14															0	1	1
Compare to Event 15																1	1

Mann-Kendall Statistic (S)

6

90 % Confidence Mann-Kendall Statistic

30

Table 7
Monitoring Well PMA MW-4D Mann-Kendall Trend Analysis

	W.G.Krummrich Facility PCB Mfg. Area Monitoring Well MW-4D Mann-Kendall Trend Analysis															
	Event 1	Event 2	Event 3	Event 4	Event 5	Event 6	Event 7	Event 8	Event 9	Event 10	Event 11	Event 12	Event 13	Event 14	Event 15	Row
	2Q06	3Q06	4Q06	1Q07	2Q07	3Q07	4Q07	1Q08	2Q08	4Q08	1Q09	2Q09	3Q09	4Q09	1Q10	Total
Total PCBs, µg/L	0.34	0.10	2.07	0.33	0.50	0.35	0.23	0.27	0.44	0.27	2.73	0.59	0.37	0.61	0.54	
Compare to Event 1		-1	1	-1	1	1	-1	-1	1	-1	1	1	1	1	1	4
Compare to Event 2			1	1	1	1	1	1	1	1	1	1	1	1	1	13
Compare to Event 3		·		-1	-1	-1	-1	-1	-1	-1	1	-1	-1	-1	-1	-10
Compare to Event 4					1	1	-1	-1	1	-1	1	1	1	1	1	5
Compare to Event 5				·		-1	-1	-1	-1	-1	1	1	-1	1	1	-2
Compare to Event 6							-1	-1	1	-1	1	1	1	1	1	3
Compare to Event 7						·		1	1	1	1	1	1	1	1	8
Compare to Event 8									1	1	1	1	1	1	1	7
Compare to Event 9										-1	1	1	-1	1	1	2
Compare to Event 10											1	1	1	1	1	5
Compare to Event 11												-1	-1	-1	-1	-4
Compare to Event 12													-1	1	-1	-1
Compare to Event 13														1	1	2
Compare to Event 14															-1	-1

Mann-Kendall Statistic (S) 31

90 % Confidence Mann-Kendall Statistic

20

Table 8
Monitoring Well PMA MW-6D Mann-Kendall Trend Analysis

W.G.	W.G.Krummrich Facility Well PMA MW-6D Mann-Kendall Trend Analysis													
	Event 1 Event 2 Event 3 Event 4 Event 5 Event 6 Event 7													
	3Q08	4Q08	1Q09	2Q09	3Q09	4Q09	1Q10	Total						
Total PCBs, ug/L	0.21	0.43	0.32	0.29	0.20	0.30	0.19							
Compare to Event 1		1	1	1	-1	1	-1	2						
Compare to Event 2			-1	-1	-1	-1	-1	-5						
Compare to Event 3				-1	-1	-1	-1	-4						
Compare to Event 4					-1	1	-1	-1						
Compare to Event 5						1	-1	0						
Compare to Event 6							-1	-1						

Mann-Kendall Statistic (S) -9

90 % Confidence Mann-Kendall Statistic -11

# Appendix A Groundwater Purging and Sampling Forms

PROJECT NAME:	122/10	PROJECT WEATHER	NUMBER:	21562401.00001		ELD PERSONNEL:		Corbett, D	rew Brouk	
MONITORING WE	LL ID! PMAMWO	IM		SAMP	PLE ID:	PMAMW0	1M-0210			
				<del></del>				:		
INITIAL DATA										
Constructed Well Depth to Water (bto Depth to LNAPL/DN Depth to Top of Sci	th (btoc): <b>59.6</b> feepth (btoc): 59.30 feepth (btoc): 10.63 feepth (btoc): 54.30 feepth (btoc	ft If Depth to To ft Place Pump a t If Depth to To t Place Pump a	p of Screen is > Deptr t: Total Well Depth – C p of Screen is < Dept t: Total Well Depth – (	0.5 X Water Column He	IAPL Column Height Column Height and S ight + DNAPL Colum	creen Length are (4ft,	ft btoc  ft btoc	olume of Flow Throug linimum Purge Volume (3 x Flow Through Cel Imbient PID/FID Readir Vellbore PID/FID Readir	:= I Volume) 3, 4.	
PURGE DATA Pump Type:	Stainless Steel Mon	soon			±0.2 units		.29/		10 % or 0.2 mail	.20 m)/
Purge Volume		Depth to			±0.2 Units	Temp	±3 % Cond.	Turbidity	±10 % or 0.2 mg/L DO	±20 mV
(mL)	Time	Water (ft)	Color	Odor	pH	(°C)	(ms/cm)	(NTUs)	(mg/l)	(mv)
1200	1152 1156	10,65	coloriess	hydrocarton	6.69	14.80 14.83	2.062 2.156	7.8	0.56	-97.6
2400	1158				6.68	14.92	2.179	4.9	0.52	-128.0
3600	1901				6.70	14.48	2.175	10.0	0.23	-138.6
4800	1204	,	,		6.71	15.00	2.161	3.7	0.20	-139.7
6000	1207		<b>V</b>	V	6.71	14.92	2.166	9.2	0.17	-140.2
			-					-		
			-					Me		
				-						
Start Time:	1207			osed Time: rage Purge Rate (mL/m	15 min.		Water Qua	ality Meter ID:	YSI 6920	
									<u> </u>	
SAMPLING DAT	A									
Sample Date:	2/22/10		Sar	nple Time:	1210		Analysis:	Total PCBs		
Sample Method: COMMENTS:	Stainless Steel Monson	on		nple Flow Rate:	400 m	Ymin.	QA/QC Sa		c	

PROJECT NAME:		PROJECT I		562401.00001	F	ELD PERSONNEL:	Mike	Corbett, Dree	n Brank	· 
MONITORING WE	/ンラ/IO LL ID: PMAMW01S	WEATHER	ં તૃરુષ	dy, 35.F SAT	MPLE ID:	PMAMW	018-0210	MAMWOIS -08	10-MS,	PMAMWOLS-02
Constructed Well D Depth to Water (bto Depth to LNAPL/DN Depth to Top of Sc Screen Length:	in th (btoc): 24.91 ft epth (btoc): 24.94 ft c): 10.12 ft APL (btoc): ft reen (btoc): 19.94 ft ft	If Depth to Top Place Pump at: If Depth to Top Place Pump at:	of Screen is > Dep Total Well Depth- of Screen is < De Total Well Depth-	lude LNAPL or DNAPL) oth to Water AND Scree – 0.5 (Screen Length + pth to Water AND Wate – (0.5 X Water Column I lumn height is < 4 ft, Pl	en Lenth is (4 feet, DNAPL Column Heigh er Column Height and S Height + DNAPL Colum	t) = 22.44 Screen Length are (4ft nn Height) =	ft btoc	Volume of Flow Through Minimum Purge Volume (3 x Flow Through Cel Ambient PID/FID Readin Wellbore PID/FID Readin	i = i Volume) 3, ng: <b>7.0</b>	150 mL
PURGE DATA Pump Type:	Stainless Steel Monso	oon								
	_				±0.2 units		±3 %		±10 % or 0.2	mg/L ±20 mV
Purge Volume (mL)	Time	Depth to	Color	Odor	all all	Temp	Cond.	Turbidity	DO	ORP
D (IIIL)	1057	Water (ft)  1 ≥ . \$3	colorless		pH 6.65	(°C) 15.08	(ms/cm)	(NTUs) 3.3	(mg/l)	(mv) 46.6
1200	1100	10.64	1	1	6.60	15.07	1.151	<u> </u>	0.83	47.1
2400	1103	10-63			6.56	15.09	1.161	1.6	0.49	48.9
3600	1106	10.63	1		6.55	14.93	1.168	1.1	0.40	50.6
4800	1109	10.63			6.54	14.86	1-172	0.7	0.24	52.4
4000	1112	1			6.54	14.99	1-171	0.5	0.20	54.5
7200	1113	1	<b>V</b>	V	6.54	15.07	1-170	0.5	0.20	\$5.2
						-				
	1							MEC	-	
Start Time:Stop Time:SAMPLING DAT	1115 A		A	ilapsed Time: verage Purge Rate (mL				Quality Meter ID:	YSI 6920	
Sample Date: Sample Method:	2 22 10 Stainless Steel Monsoon			Sample Time: Sample Flow Rate:	1120 400 ml/s	• -		sis: Total PCBs		
	orainiess oreel Monsoon	1	8	oampie riow Kate:	400 mc/s	ViV	QA/QC	C Samples: MS/MSD		
COMMENTS:										

PROJECT NAME: DATE:	PCB GW Quality Assessment	PROJECT WEATHER		2401.00001	FI	ELD PERSONNEL:	Mikelo	rbett, Dre	w Brouk	_
	LL ID: PMAMW02N		· Gra	SAMP	LE ID:	PMAMW	2M-0210			
INITIAL DATA										
Well Diameter: 2	in			de LNAPL or DNAPL):		.03	ft Vo	olume of Flow Throug	h Cell ):	<u>δ</u> ΔmL
Measured Well Dept	th (btoc): 61.53 ft epth (btoc): 61.54 ft			to Water AND Screen I 0.5 (Screen Length + DN		= 59.04		inimum Purge Volume (3 x Flow Through Cel		<b>7</b> 0 mL
Depth to Water (bto	c):ft	If Depth to Top	of Screen is < Dept	h to Water AND Water C	olumn Height and S	creen Length are ( 4ft,	A	mbient PID/FID Readir		ppm
	APL (btoc): ft reen (btoc): 56.54 ft	Place Pump at	: Total Well Depth - (	0.5 X Water Column Hei nn height is < 4 ft, Place	ight + DNAPL Colum	n Height) =	ft btoc W	ellbore PID/FID Readi		ppm
Screen Length:		ir Screen Leng	th and/or water colu	nn neight is < 4 ft, Place	e Pump at: Total Wei	Depth - 2 ft =	ft btoc			
· _										
<b>PURGE DATA</b>										
Pump Type:	Stainless Steel Monso	oon								
					±0.2 units		±3 %		±10 % or 0.2 mg/L	±20 mV
Purge Volume	Time	Depth to	Calan	Odes		Temp	Cond.	Turbidity	DO	ORP
(mL)	Time 1343	Water (ft)	Colories Colories	hydrocarbon	pH 7.06	(°C) 15.67	(ms/cm) 2.048	(NTUs)	(mg/f) 0.90	(mv) -108.7
1200	1346	1	Lowers	Prygrocal -on	6.99	15.88	2.117	15.8	0.28	-136.5
2400	1349				6.96	16.00	2.137	7.5	0.18	-150.5
3600 4800	1353		//	1	6.94	16.00	2.135	6.4	0.14	-152.5
4000	13.55		V	¥	6.92	16.00	2.135	4.0	0.12	~154.0
		_						•		
			1					M		
Start Time:	1343		Fla	psed Time:	12 min	_	Mater Oua	lity Meter ID:	YSI 6920	
Stop Time:	13 55			erage Purge Rate (mL/m			Date Calib	rated:	28/10	
	12 2 7			rago rango rato (mzm	)		bate ound	alcu.		
SAMPLING DAT	Δ									
Or thin Ento Brit	<u>.</u>									
Sample Date:	2/27	L/10		nple Time:	1400		•	Total PCBs		
Sample Method:	Stainless Steel Monsoon	1 *	Sar	nple Flow Rate:	1400 400 m	L/min	QA/QC Sai	mples: AD - F	MAMWOZM.	-0210-AD
					•	,			•	
COMMENTS:										

PCB GW Quality FIELD PERSONNEL: Mike Corbett, Draw Browk PROJECT NAME: Assessment PROJECT NUMBER: 21562401.00001 2/22/10 WEATHER: Cloudy, 36°F MONITORING WELL ID: PMAMW02S SAMPLE ID: PMAMW02S-0210 INITIAL DATA 15.16 Well Diameter: 2 Water Column Height (do not include LNAPL or DNAPL): Volume of Flow Through Cell ): Measured Well Depth (btoc): 27.33 ft If Depth to Top of Screen is > Depth to Water AND Screen Lenth is (4 feet, Minimum Purge Volume = Constructed Well Depth (btoc): 27.33 ft Place Pump at: Total Well Depth - 0.5 (Screen Length + DNAPL Column Height) = ft btoc (3 x Flow Through Cell Volume) mL Depth to Water (btoc): 12.17 ft If Depth to Top of Screen is < Depth to Water AND Water Column Height and Screen Length are 4 4ft. Ambient PID/FID Reading: 0.0 maa Depth to LNAPL/DNAPL (btoc): -Place Pump at: Total Well Depth - (0.5 X Water Column Height + DNAPL Column Height) = ft btoc Wellbore PID/FID Reading: 0.0 ppm Depth to Top of Screen (btoc): 22.33 If Screen Length and/or water column height is < 4 ft, Place Pump at: Total Well Depth - 2 ft = Screen Length: 5 **PURGE DATA** Pump Type: Stainless Steel Monsoon ±0.2 units ±3% ±10 % or 0.2 mg/L ±20 mV Purge Volume Depth to Temp Cond. Turbidity DO ORP Time Color Odor (mL) Water (ft) рΗ (ms/cm) (NTUs) (mq/l)(mv) 0 1430 7.20 0.931 coloriess si hydrocarbon 16.27 -2.3 -48.5 12.30 0.67 -43.6 7.01 1200 1433 12.24 16.32 7.4 0.35 2400 1436 6.93 0.33 1434 3600 0.25 1442 4800 0.22 12 min. Start Time: Elapsed Time: Water Quality Meter ID: Stop Time: Average Purge Rate (mL/min): Date Calibrated: SAMPLING DATA 1445 400 mL/min. Sample Date: Sample Time: Analysis: Total PCBs Sample Flow Rate: Sample Method: QA/QC Samples: before this well-PMAMWOZS-0210-EB **COMMENTS:** 

#### LOW FLOW GROUNDWATE. MPLING DATA SHEET

PROJECT NAME:		_ PROJECT!		562401.00001	FIE	LD PERSONNEL:	Mike	Corbett, Drev	w Brouk	
DATE:	2/33/10 LL ID: PMAMW03M	_ WEATHER:	$=$ $> \omega_{nn}$	4, 30°F	PLE ID:	DAGAAGIAIO	234 0240			
WONITORING WE	LL ID: PIVIAIVIVVUSIVI			SAIWI	PLE ID:	PMAMWO	3141-0210			
INITIAL DATA					. •					
Well Diameter: 2	in			lude LNAPL or DNAPL):_		<del>?</del> 7	ft	Volume of Flow Through		<b>150</b> mL
•	h (btoc): 61-80 ft			oth to Water AND Screen		Ca 21	0.17	Minimum Purge Volume		
Depth to Water (bto	epth (btoc): 61.81 ft c): 12.53 ft			<ul> <li>0.5 (Screen Length + Diepth to Water</li> </ul>			ft btoc	(3 x Flow Through Cel Ambient PID/FID Readin		, 450 mL O ppm
	APL (btoc): ——— ft			- (0.5 X Water Column He			ft btoc	Wellbore PID/FID Reading		
•	reen (btoc): 56.81 ft			lumn height is < 4 ft, Place			ft btoc	Vicibole Libit to Readi.	.9	pp
Screen Length:				J						
PURGE DATA										
Pump Type:	Stainless Steel Monsoo	n								
, 2	otamioo otoor monoo			_	0.0 # .				. 40 0/ 0 0 !!	. 221/
Purge Volume		Depth to			±0.2 units	Temp	<u>±3 %</u> Cond.	Turbidity	±10 % or 0.2 mg/L	<u>±20 mV</u>
(mL)	Time	Water (ft)	Color	Odòr	рΗ	(°C)	(ms/cm)	(NTUs)	(mg/l)	(mv)
0	1104	12.53	brown	hydrocarbon	8.95	17.19	2.471	35.5	0.14	-70.1
1200	1107	1	1	7.9.7.5.2.77	9.01	17.17	2.478	30.8	0.09	-85.6
2400	1110				9.06	17.06	2.48/	26.1	0.08	-98.1
3600	1113				9.10	17.14	2.479	20.6	0.06	-113.0
4800	1116				9.11	17.15	2.479	17.6	0.05	-125.8
6000	1119				9.09	17.16	2.478	14.7	0.04	-138.7
7200	1133	<del></del>	<del>                                     </del>		9.11	17.31	2.478 2.478	12.3	0.04	-157.7
8400 9600	1125		-		9.17	17.28	2.480	11.9	0.03	-159.6
10800	1128				9.19	17.30	2.482	10.8	0.02	-175.8
12000	134		,		4.23	17.20	2.486	9.2	0.02	~182.2
13,200	1137	1	1	1/	9.26	17.15	2.484	9.1	0.01	-186.8
								MEC		
	1				20	. •				
Start Time:	1104			lapsed Time:		<u>lin.</u>		uality Meter ID:	YSI 6920	
Stop Time:	1137			Average Purge Rate (mL/r	nin):	າ	Date Ca	librated: 2/2	3/10	
		_								
SAMPLING DAT	A				_	_		-		
Sample Date:	2/22/10		9	Sample Time:	1140		Analysi	s: Total PCBs		
Sample Method:	2/a3//0 Stainless Steel Monsoon			Sample Flow Rate:	1110		•	0		
-	Otalinoss Otec: Molisooli				400 ml	MIN.		Samples:	ne	
COMMENTS				,						
COMMENTS:										

#### LOW FLOW GROUNDWATE: AMPLING DATA SHEET

PROJECT NAME:	PCB GW Quality Assessment	PROJECT	NUMBER 2	21562401.00001	FI	ELD PERSONNEL:	M.K.	Corbett,	Danie Banel	<u> </u>
	/23/10	WEATHER		unny 32°F		LLD ! LINOOHHLL.	1 1750	· Coroque	11 cm Diver	
MONITORING WEL	LID: PMAMW038			SAMP	LE ID:	PMAMW	103S-0210			
INITIAL DATA							_			
Constructed Well Dep Depth to Water (btoc) Depth to LNAPL/DNA	in (btoc): <b>27.38</b> ft oth (btoc): 27.40 ft (btoc):	If Depth to Top Place Pump at: If Depth to Top Place Pump at:	of Screen is > D Total Well Dept of Screen is < I Total Well Dept	nclude LNAPL or DNAPL):_ Depth to Water AND Screen I th – 0.5 (Screen Length + DN Depth to Water AND Water C th – (0.5 X Water Column Hei column height is < 4 ft, Place	enth is (4 feet, APL Column Height olumn Height and S ght + DNAPL Colun	c) = 24, 90 Green Length are (4ft an Height) =	ft btoc	Volume of Flow Through Inimum Purge Volume (3 x Flow Through Cell Ambient PID/FID Reading Vellbore PID/FID Readin	= Volume) <u>3</u> p: <u>0</u> . C	
PURGE DATA Pump Type:	Stainless Steel Monso	oon								
					±0.2 units		<u>±</u> 3 %		±10 % or 0.2 mg/L	±20 mV
Purge Volume (mL)	Time	Depth to Water (ft)	Color	Odor	рH	Temp	Cond.	Turbidity	DO	ORP
O	1510	12.50	coloriess	hydrocarbon	7.21	(°C) 18.31	(ms/cm) 2.671	(NTUs) 28.2	(mg/l) 0.52	(mv)
1200	1213	1	20101 1233	Try areas can	6.96	18.47	2 675	15.3	0.3/	-16.5
2400	1216				6.90	18.36	3.677	12.1	0.31	~13.8
3600	1219				6.82	18.27	2.677	7.3	0.27	-11.1
4800	1223	//	<del></del>		6.79	18.29	2.673	<u> </u>	0.20	<u> </u>
6000	1275	₩	<b>V</b>	₩	6.75	18.26	2.669	4.5	0.14	-6.3
								MEC		
			1					MEZ		
					-					
Start Time:Stop Time:	1210 1225			Elapsed Time: Average Purge Rate (mL/m	15 m in): 400		_	,	YSI 6920 '>3//0	
SAMPLING DATA	4									
Sample Date:	2/23/10			Sample Time:	1230	m L/min		Total PCBs		
Sample Method:	Stainless Steel Monsoon			Sample Flow Rate:	400	m L/min	QA/QC Sa	amples:non		
COMMENTS:										

#### LOW FLOW GROUNDWATE. . MPLING DATA SHEET

PROJECT NAME: DATE:	PCB GW Quality Assessment	PROJECT		2401.00001	FI	ELD PERSONNEL:	Mike	Corbett, D	rew Brouk	
	LID: PMAMW04D			, 32°F SAMP	PLE ID:	PMAMWO	04D-0210	_		
Constructed Well De	in (bloc): 73.35 ft pth (bloc): 73.50 ft	If Depth to Top	of Screen is > Depth	le LNAPL or DNAPL):_ to Water AND Screen I .5 (Screen Length + DN	Lenth is <4 feet,	2.30	ft btoc	Volume of Flow Throug Minimum Purge Volume (3 x Flow Through Cel	= =	, <i>/50</i> mL
Depth to LNAPL/DNA	): 11.05 ft APL (btoc): ft een (btoc): 68.50 ft ft	Place Pump at:	Total Well Depth - (	n to Water AND Water C 0.5 X Water Column He nn height is < 4 ft, Place	ight + DNAPL Colun	ın Height) =	ft btoc	Ambient PID/FID Readir Wellbore PID/FID Readir		ppm
PURGE DATA	Ctainless Ctar(Manage									
Pump Type:	Stainless Steel Monsoo	M			±0.2 units		±3 %		±10 % or 0.2 mg/L	±20 mV
Purge Volume (mL)	Time	Depth to Water (ft)	Color	Odor	pH	Temp (°C)	Cond. (ms/cm)	Turbidity (NTUs)	DO (mg/l)	ORP (mv)
0	1351	11.05	coloriess	hydrocarbon	6.77	16.18	1.514	10.6	0.46	-131.8
2400	(357				6.68	16.51	1.512	6.6	0.27	-143.2
360D	1357 1400 1403	1/	1		6.68	16.51	1.513	5.3	0.16	-145.9
4800	1903			•	6.70	16.63	1.516	5.6	0.15	-/48. [
							_			
									_	
		-								
								MEC		
Start Time:Stop Time:	1351			osed Time: erage Purge Rate (mL/m					YSI 6920	
SAMPLING DAT	Δ									
			0			1 mg	A malusala	Total DCDa		
Sample Date: Sample Method:	2/23/10 Stainless Steel Monsoon			nple Time: nple Flow Rate:	400 mL/		,	s: Total PCBs Samples:		
—					400 mL/1	<u> </u>		ha	ne	
COMMENTS:										

#### LOW FLOW GROUNDWATEN ... MPLING DATA SHEET

PROJECT NAME: DATE: 3 MONITORING WEI	PCB GW Quality Assessment  -/ 23/10  LL ID: PMAMW04S	WEATHER		35° F SAMPI		ELD PERSONNEL:	,	rens Browk		
Constructed Well De Depth to Water (btoo Depth to LNAPL/DN	APL (btoc): ft een (btoc): 20.33 ft	If Depth to Top Place Pump at If Depth to Top Place Pump at	p of Screen is > Dept t: Total Well Depth — p of Screen is < Dept t: Total Well Depth —	de LNAPL or DNAPL): in to Water AND Screen L 0.5 (Screen Length + DN ith to Water AND Water C (0.5 X Water Column Hei imn height is < 4 ft, Place	APL Column Height olumn Height and S ght + DNAPL Colum	creen Length are ( 4ft, in Height) =	ft btoc	olume of Flow Through inimum Purge Volume (3 x Flow Through Cel mbient PID/FID Readin fellbore PID/FID Readin	=   Volume)	
PURGE DATA Pump Type:	Stainless Steel Monsog	on								
					±0.2 units		±3 %	T 1111	±10 % or 0.2 mg/L	±20 mV
Purge Volume (mL)	Time	Depth to Water (ft)	Color	Odor	Hq	Temp (°C)	Cond. (ms/cm)	Turbidity (NTUs)	DO (mg/l)	ORP (mv)
0	1449	11.40	light yrey		6 · 77	16.67	2,207	67.7	0.28	~91.7
12-00	1452	11.40	Tigm gicy	hydrocarbon	6.73	16.74	2.220	54.4	0.23	-96.9
2400	1455	11.			6.71	16.79	2.215	42.0	0.21	- 100.1
3600	1458				6.69	16.78	2.204	24.8	0.19	-107.3
4800	1501				6.68	16.84	2.200	21.5	0.12	-109.0
6000	1504				6.68	16.84	2.202	19.4	0.09	-110.5
7200	1507				6.67	16.77	2.213	16.2	0.09	-//2.3
8400	1510				6.67	16.80	2.218	14.4	0.07	-113.1
9600	1513	1			6.68	16.96	2.226	13.2	0.07	-114.2
10800	1516				6.66	17.08	2-231	11.7	0.08	-115.3
12000	15.19	11			6.69	16.99	2.237	11.1	0.08	-115.6
13200	1522	7,		,	6.67	16.91	2.244	10.4	0.08	-116.1
14400	1525		₩	V	6.66	17.02	2.249	9,2	0.06	4-116.6
								_		AIC
Start Time:Stop Time:	1449 1525	_		psed Time: erage Purge Rate (mL/mi	36 m/n.	0	Water Qua	ulity Meter ID:	YSI 6920 3//O	
SAMPLING DAT	A				-					
Sample Date:	2/22/2		S2	mple Time:	1530		Analysis:	Total PCBs		
•	7/23/10 Stainless St		- 50	mple Flow Rate:			QA/QC Sa	mulaar		
Sample Method:	Stainless St	rel Monso	Sa/1 Sa	inple rlow Rate:	400 mL	d min.	WAVQC 58	mpies.	ne.	
COMMENTS:					·					

**PCB GW Quality** FIELD PERSONNEL: Mike Coolett, Drew Browk PROJECT NUMBER: 21562401.00001 PROJECT NAME: Assessment 2/22/10 WEATHER: cloudy, 38°F MONITORING WELL ID: PMAMW05M SAMPLE ID: PMAMW05M-0210 INITIAL DATA 45 41 Well Diameter: Water Column Height (do not include LNAPL or DNAPL): Volume of Flow Through Cell ): mL Measured Well Depth (btoc): 56.97 ft Minimum Purge Volume = If Depth to Top of Screen is > Depth to Water AND Screen Lenth is (4 feet. Place Pump at: Total Well Depth - 0.5 (Screen Length + DNAPL Column Height) = Constructed Well Depth (btoc): 56.87 ft ft btoc (3 x Flow Through Cell Volume) mL Depth to Water (btoc): 11-56 ft If Depth to Top of Screen is < Depth to Water AND Water Column Height and Screen Length are 4 4ft. Ambient PID/FID Reading: 0.0 ppm Depth to LNAPL/DNAPL (btoc): ft Place Pump at: Total Well Depth - (0.5 X Water Column Height + DNAPL Column Height) = Wellbore PID/FID Reading: 0.0 - ft btoc mag Depth to Top of Screen (btoc): 51.87 ft If Screen Length and/or water column height is < 4 ft. Place Pump at: Total Well Depth - 2 ft = \_\_\_\_\_ ft btoc Screen Length: PURGE DATA Pump Type: Stainless Steel Monsoon ±0.2 units ±3 % ±10 % or 0.2 mg/L ±20 mV Purge Volume Depth to Temp Cond. Turbidity DO ORP Odor (mL) Time Water (ft) Color рΗ (NTUs) (°C) (ms/cm) (mg/l)(mv) 6.93 O 1517 st hydrocarbon 16.57 D. 347 -25.0 colorless 1.02 11.60 6.95 6.92 6.93 6.93 1520 0.9 1200 16.39 0.54 -51.1 2400 0.7 - 59.2 16.19 2,441 3600 1526 16.13 0.5 -67.2 1860 15.99 0.4 6.92 4000 15-81 7200 15.52 693 1538 Start Time: Elapsed Time: Water Quality Meter ID: YSI 6920 1538 400 Date Calibrated: Stop Time: Average Purge Rate (mL/min): SAMPLING DATA Sample Date: Sample Time: Analysis: Total PCBs QA/QC Samples: Sample Method: Stainless Steel Monsoon Sample Flow Rate: none COMMENTS:

PROJECT NAME: DATE:	PCB GW Quality Assessment 2/23/10	PROJECT		562401.00001 mny, 25°F	FII	ELD PERSONNEL:	Mike Co	orbett, Dra	- Brouk	
	LL ID: PMAMW06D		·5.6	mny, 25°F	PLE ID:	PMAMW	06D-0210			
						_		8		
INITIAL DATA	3 .				a	2.76				<b>~</b>
Constructed Well Dopth to Water (bto Depth to LNAPL/DN	in (btoc): 101.18 ft c): 8.53 ft APL (btoc): 96.18 ft reen (btoc): 96.18 ft	If Depth to Top Place Pump at: If Depth to Top Place Pump at:	of Screen is > Dep Total Well Depth- of Screen is < De Total Well Depth-	ude LNAPL or DNAPL):_ oth to Water AND Screen - 0.5 (Screen Length + DN pth to Water AND Water ( - (0.5 X Water Column He umn height is < 4 ft, Plac	Lenth is (4 feet, NAPL Column Height) Column Height and S sight + DNAPL Colum	= 98.68 creen Length are (4ft, n Height) =	Mir ft btoc (3 Am ft btoc We	ume of Flow Through nimum Purge Volume = 3 x Flow Through Cell bient PID/FID Reading libore PID/FID Reading	volume) 3, 4,	50 mL
Screen Length:	ft				•					
PURGE DATA Pump Type:	Stainless Steel Monso	on_								
					±0.2 units		±3 %		±10 % or 0.2 mg/L	±20 mV
Purge Volume (mL)	Time	Depth to Water (ft)	Color	Odor	рН	Temp (°C)	Cond. (ms/cm)	Turbidity (NTUs)	DO (mg/l)	ORP (mv)
0	1004	8.53	dark gray		10.93	15.92	1.154	54.4	0.41	-117.2
1200	1007		707	7	6.93	16.06	1.155	23.4	0.27	~/32.1
2400	1010				6.81	16.03	1.168	9.7	0,23	-137.1
3600	1013				6.82	15.99	1.170	8.7	0.19	-141.4
4 <i>800</i>	1016	<b></b>	<b>↓</b>	<b>v</b>	6.81	15.90	1.179	6.0	0.17	-144.4
									.,	
								_		
_									•	
								02		
			-	_	1			ME		
<del></del> .				_						
Start Time:	1004			lapsed Time:	12 m		Water Quali		/SI 6920	
Stop Time:	1016		A	verage Purge Rate (mL/n	nin): 400		Date Calibra	ated: 2/3	3/10	
SAMPLING DAT	· ^									
SAMPLING DAT										
Sample Date:	Z/23[	10	S	ample Time:	1020		Analysis:	Total PCBs		
Sample Method:	Stainless Steel Monsoon		S	ample Flow Rate:	102D 400 m	L/min	QA/QC Sam	pples: non	e	
COMMENTS:						7				

# Appendix B Chains-of-Custody

### Savannah

5102 LaRoche Avenue

### **Chain of Custody Record**

<u>TestAmerica</u>

Savannah, GA 31404 TestAmerica Laboratories, Inc. phone 912.354.7858 fax 912.352.0165 COC No: 2/22/10 Site Contact: Mike Corbett Client Contact Project Manager: Jeff Adams Date: FedEX of \_\_\_\_ COCs Lab Contact: Lidya Gulizia Carrier: **URS** Corporation Tel/Fax: (314) 743-4228 Job No. 1001 Highlands Plaza Drive West, Suite 300 **Analysis Turnaround Time** St. Louis, MO 63110 ' Calendar (C) or Work Days (W) 21562401.00001 (314) 429-0100 Phone TAT if different from Below Standard SDG No. (314) 429-0462 FAX 2 weeks Project Name: 1Q10 PCB GW Sampling 1 week Total PCBs by 680 Site: Solutia WG Krummrich Facility 2 days PO# i day Sample Sample Sample # of Date Sample Identification Time Type Matrix Cont. Sample Specific Notes: PMA-MW-25 -0210 2 2/32/10/1130 Water 2 PMA-MW-15 -0210 - MS G 2 2 Water 1120 2 G 2 PMA-MW-15 -0210 - MSD Water 1120 PMA-MW-11-0210 2 G 2 Water 1210 PMA-MW-2M-0210 2 1400 G Water 2 PMA-MW- 2M-0210 - AD -G 1400 Water 2 PMA-MW-25 -0210-EB G 2 Water 2 PMA-MW- 25-0210 -G 2 2 Water PMA-MW-5M-0210 -2 2 Water Water 2 2 PMA-MW-Preservation Used: 1= Ice, 2= HCl; 3= H2SO4; 4=HNO3; 5=NaOH; 6= Other Sample Disposal ( A fee may be assessed if samples are retained longer than 1 month) Possible Hazard Identification Archive For Flammable Skin frritant Return To Client Disposal By Lab Special Instructions/QC Requirements & Comments: Level 4 Data Package 680-55249 Received by:

Received by: Relinquished by: Relinquished by:

Relinquished by:

Theolale Company: Date/Time: <u>الحداد ( 700</u> Date/Time: Date/Time: 1700 URS Company:

### Savannah

5102 LaRoche Avenue

# **Chain of Custody Record**

<u>TestAmerica</u>

Savannah, GA 31404

THE LEADER IN ENVIRONMENTAL TESTING

phone 912.354.7858 fax 912.352.0165																					TestAmerica Labor	ratories, Inc.	
Client Contact	Project Ma	nager: Jeff	Adams			Site	Co	ntact	: Mik	e Cor	bett			Date:		2/	23	110			COC No:		
URS Corporation	Tel/Fax: (3	14) 743-422	<b>.</b> 8			Lat	Co	ntact	: Lidy	ya Gu	lizia			Carr	ier:	-	FLA	EX			of CO	)Cs	
1001 Highlands Plaza Drive West, Suite 300	,	Analysis Tu	rnaround '	Time			П			П					$\neg$		П		Т		Job No.	_	٦
St. Louis, MO 63110	Calendar	(C) or Wo	rk Days (W)	)						11											21562401	1.00001	
(314) 429-0100 Phone		AT if different i	from Below _S	tandard						11													_
(314) 429-0462 FAX		2	weeks							11											SDG No.		
Project Name: 1Q10 PCB GW Sampling		1	week							11													
Site: Solutia WG Krummrich Facility		2	days			9	88			11													
PO#		1	day				s by			11		-			1								
Sample Identification	Sample Date	Sample Time	Sample Type	Matrix	# of Cont.	Filtered S.	Total PCBs														Sample Speci	ific Notes:	
PMA-MW- <b>6 D</b> -0210	2/23/10	1020	G	Water	2	$\prod$	2																
PMA-MW- <b>3M</b> -0210 —	' '_	1140	G	Water	2	Ц	2			Ш		$\perp$		Ш			Ц						
PMA-MW- <u><b>35</b></u> -0210 —		1230	G	Water	2	Ц	2		$\perp$	Ш		$\perp$		Ц	$\perp$								
PMA-MW- <u>4D</u> -0210 /		1405	G	Water	2	Ц	2		$\perp$	Ш	_	$\perp$			$\perp$	$\perp$	Ц		$\perp$				
PMA-MW- <u>4\$</u> -0210	V.	1530	G	Water	2	Ц	2		$\perp$	Ш		$\perp$		Ш		L	Ц		$\perp$				
PMA-MW0210			G	Water	2	Ц	2		$\perp$	Ш				Ц			Ц						
PMA-MW0210			G	Water	2	Ц	2		$\perp$					Ш			Ц						,
PMA-MW0210			G	Water	2	Ц	2			Ш		$\perp$					Ц						
PMA-MW0210			G	Water	2	Ц	2	Ц	$\perp$	Ш		$\perp$					Ц	$\perp$		L			
PMA-MW0210			G	Water	2	Ц	2			Ш		$\perp$		Ш	$\perp$	$\perp$	Ш		$\perp$				
						Ц			$\perp$	Ш		$\perp$		Ц					$\perp$				
						Ц				Ш							-						
Preservation Used: 1= Ice, 2= HCl; 3= H2SO4; 4=HNO3; 5=NaC	)H; 6= Othe	er					1					_											
Possible Hazard Identification  Non-Hazard Flammable Skin Irritant	Poison	$_{B}$	Unknown				Sar			<b>osal (</b> To Cl				asse Dispo					re reta □ <sub>Arc</sub>		d longer than 1 mon For Mo	nth) onths	
Special Instructions/QC Requirements & Comments: Level 4 December 1						_	_				-					,							_
Special institutions, Quantum and a comment of the		<b>5</b> -										;				_	,	,	1				
												68	۵-	55	28	33	/	٠٥,	0.	<u>ፄ.</u>			
Relinquished by:	Company:	URS		Date/Tir	ne: //0/	760	Rec (	eived	by:	he	a)	al	و		Co	ompai	ny: <b>14</b>				Date/Time:	1700	
Relinquished by:	Company:	DA.		Date/Ti	ne:	770	Rec	eived	by:						Co	ompai	ny:				Date/Time:		
Relinquished by:	Company:			Date/Tin	ne:		Rec	eived	by:y	eo	ze	K	_	_	Co	ompai To	A S	<b>S</b> 1	/		Date/Time: 2 24/13	0919	
						_			•		_					-							_

# Appendix C Quality Assurance Report

### QUALITY ASSURANCE REPORT

Solutia Inc. W.G. Krummrich Facility Sauget, Illinois

PCB Groundwater Quality Assessment Program 1<sup>st</sup> Quarter 2010 Data Report

Prepared for

Solutia Inc. 575 Maryville Centre Drive St. Louis, MO 63141

April 2010



URS Corporation 1001 Highland Plaza Drive West, Suite 300 St. Louis, MO 63110 (314) 429-0100 **Project # 21562401** 

# PCB Groundwater Quality Assessment Program W.G. Krummrich Facility Sauget, Illinois

### **1Q10 DATA REPORT**

1.0	INTRODUCTION	1
2.0	RECEIPT CONDITION AND SAMPLE HOLDING TIMES	2
3.0	LABORATORY METHOD AND EQUIPMENT BLANK SAMPLES	3
4.0	SURROGATE SPIKE RECOVERIES	3
5.0	LABORATORY CONTROL SAMPLE RECOVERIES	4
6.0	MATRIX SPIKE/MATRIX SPIKE DUPLICATE (MS/MSD) SAMPLES	4
7.0	FIELD DUPLICATE RESULTS	4
8.0	INTERNAL STANDARD RESPONSES	5
9.0	RESULTS REPORTED FROM DILUTIONS	5



i

### 1.0 INTRODUCTION

This Quality Assurance Report presents the findings of a review of analytical data for groundwater samples collected in February of 2010 at the Solutia W.G. Krummrich plant as part of the 1<sup>st</sup> Quarter 2010 PCB Groundwater Quality Assessment Program. The samples were collected by URS Corporation personnel and analyzed by TestAmerica Laboratories located in Savannah, Georgia using USEPA methodologies. Samples were analyzed for polychlorinated biphenyls (PCBs).

One hundred percent of the data were subjected to a data quality review (Level III validation). The Level III reviews were performed in order to confirm that the analytical data provided by TestAmerica were acceptable in quality for their intended use.

A total of 14 samples (ten investigative groundwater samples, one field duplicate pair, one matrix spike and matrix spike duplicate (MS/MSD) pair, and one equipment blank) were analyzed by TestAmerica. These samples were analyzed as part of Sample Delivery Group (SDG) KPM037 utilizing the following USEPA Methods:

### Method 680 for PCBs

Samples were reviewed following procedures outlined in the USEPA National Functional Guidelines for Superfund Organic Methods Data Review (USEPA 2008) and the Revised PCB Groundwater Quality Assessment Work Plan (Solutia 2009).

The above guidelines provided the criteria to review the data. Additional quantitative criteria are given in the analytical methods. Data was qualified based on the data quality review. Qualifiers assigned indicate data that did not meet acceptance criteria and for which corrective actions were not successful or not performed. The various qualifiers are explained in **Tables 1** and **2** below:

**TABLE 1 Laboratory Data Qualifiers** 

Lab Qualifier	Definition
U	Analyte was not detected at or above the reporting limit.
*	LCS, LCSD, MS, MSD, MD or surrogate exceeds the control limits.
E	Result exceeded the calibration range, secondary dilution required.
D	Surrogate or matrix spike recoveries were not obtained because the extract was diluted for analysis; also compounds analyzed at a dilution will be flagged with a D.
J	Result is less than the RL but greater than or equal to the MDL and the concentration is an approximate value.
N	MS, MSD: Spike recovery exceeds upper or lower control limits.
Н	Sample was prepped or analyzed beyond the specified holding time.
В	Compound was found in the blank and sample.
4	MS, MSD: The analyte present in the original sample is 4 times greater than the matrix spike concentration; therefore, control limits are not applicable.



### **TABLE 2 URS Data Qualifiers**

URS Qualifier	Definition
U	The analyte was analyzed for but was not detected.
J	The analyte was positively identified; the associated numerical value is the approximate concentration of the analyte in the sample.
ΩJ	The analyte was not detected above the reported sample quantitation limit. However, the reported quantitation limit is approximate and may or may not represent the actual limit of quantitation necessary to accurately and precisely measure the analyte in the sample.
R	The sample results are rejected due to serious deficiencies in the ability to analyze the sample and meet quality control criteria. The presence or absence of the analyte cannot be verified.

Based on the criteria outlined, it is recommended that the results reported for these analyses are accepted for their intended use. Acceptable levels of accuracy, precision, and representativeness (based on MS/MSD, LCS, surrogate compounds and field duplicate results) were achieved for this data set, except where noted in this report. In addition, analytical completeness, defined to be the percentage of analytical results which are judged to be valid, including estimated detect/nondetect (J/UJ) values was 100 percent, which meets the completeness goal of 95 percent.

The data review included evaluation of the following criteria:

### Organics

- Receipt condition and sample holding times
- Laboratory method blanks, and field equipment blank samples
- Surrogate spike recoveries
- Laboratory control sample (LCS) recoveries
- Matrix Spike/Matrix Spike Duplicate (MS/MSD) sample recoveries and Relative Percent Difference (RPD) values
- Field duplicate results
- Results reported from dilutions
- Internal standard responses

### 2.0 RECEIPT CONDITION AND SAMPLE HOLDING TIMES

Sample holding time requirements for the analyses performed are presented in the methods and/or in the data review guidelines. Review of the sample collection, extraction and analysis dates involved comparing the chain-of-custody and the laboratory data summary forms for accuracy, consistency, and holding time compliance. Upon review of SDG KPM037, sample PMA-MW-3S-



0210 was re-extracted approximately 23 days outside of holding time criteria (7 days) due to loss of internal standards from the original extract. Professional judgment was used to qualify, but not reject data, due to the stability of PCBs. Analytical data that required qualification based on holding time criteria are summarized in the following table:

Field ID	Parameter	Analyte	Qualification
PMA-MW-3S-0210	PCBs	Monochlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Dichlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Trichlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Tetrachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Pentachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Hexachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Heptachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Octachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Nonachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	DCB Decachlorobiphenyl	UJ

The cooler receipt form indicated that four out of five coolers were received by the laboratory at temperatures below the 4°C ± 2°C criteria. Samples received were in good condition and not frozen; therefore, no qualification of data was required.

### 3.0 LABORATORY METHOD BLANK AND EQUIPMENT BLANK SAMPLES

Laboratory method blank samples evaluate the existence and magnitude of contamination problems resulting from laboratory activities. All laboratory method blank samples were analyzed at the method prescribed frequencies. No analytes were detected in the method blanks.

Equipment blank samples are used to assess the effectiveness of equipment decontamination procedures. No analytes were detected in the equipment blank sample.

### 4.0 SURROGATE SPIKE RECOVERIES

Surrogate compounds are used to evaluate overall laboratory performance for sample preparation efficiency on a per sample basis. All samples analyzed for PCBs were spiked with surrogate compounds during sample preparation. USEPA National Functional Guidelines for Superfund Organic Methods Data Review state how data is qualified, if surrogate spike recoveries do not meet evaluation criteria. Surrogate recoveries were within evaluation criteria with the exception of those surrogates in data reviews discussed further in Appendix D. No qualifications of data were required due to surrogate recoveries.



### 5.0 LABORATORY CONTROL SAMPLE RECOVERIES

Laboratory control samples (LCS) are analyzed with each analytical batch to assess the accuracy of the analytical process. All LCS recoveries were within evaluation criteria. No qualification of data was required.

### 6.0 MATRIX SPIKE/MATRIX SPIKE DUPLICATE (MS/MSD) SAMPLES

MS/MSD samples are analyzed to assess the accuracy and precision of the analytical process on an analytical sample in a particular matrix. MS/MSD samples were required to be collected at a frequency of one per 20 investigative samples in accordance with the work plan (one per 20 investigative samples or 5%). URS Corporation submitted one MS/MSD sample set for ten investigative samples, meeting the work plan frequency requirement.

No qualifications were made to the data if the MS/MSD percent recoveries were zero due to dilutions or if the Relative Percent Difference (RPD) was the only factor outside of criteria. Also, USEPA National Functional Guidelines for Superfund Organic Methods Data Review (2008) states that organic data does not need qualification based on MS/MSD criteria alone. Therefore, if recoveries were outside evaluation criteria due to matrix interference or abundance of analytes, no qualifiers were assigned unless these analytes had other quality control criteria outside evaluation criteria.

Sample PMA-MW-1S-0210 was spiked and analyzed for PCBs in SDG KPM037. All MS/MSD recoveries were within evaluation criteria. No qualification of data was required.

### 7.0 FIELD DUPLICATE RESULTS

Field duplicate results are used to evaluate precision of the entire data collection activity, including sampling, analysis and site heterogeneity. When results for both duplicate and sample values are greater than five times the practical quantitation limit (PQL), satisfactory precision is indicated by an RPD less than or equal to 25 percent for aqueous samples. Where one or both of the results of a field duplicate pair are reported at less than five times the PQL, satisfactory precision is indicated if the field duplicate results agree within 2 times the quantitation limit. Field duplicate results that do not meet these criteria may indicate unsatisfactory precision of the results.

One field duplicate sample was collected for the ten investigative samples. This satisfies the requirement in the work plan (one per 10 investigative samples or 10 percent). Field duplicate results were within evaluation criteria. No qualifications of data were required.



### 8.0 INTERNAL STANDARD RESPONSES

Internal standard (IS) performance criteria ensure that the GC/MS sensitivity and response are stable during each analytical run. For the PCBs (Method 680), the IS areas must be within +/-30 percent of the preceding calibration verification (CV) IS value. Also, the IS retention times must be within 30 seconds of the preceding IS CV retention time. If the IS area count is outside criteria, Method 680 indicates the mean IS area obtained during the initial calibration (ICAL) (+/-50 percent) should be used.

The internal standards area responses for PCBs were verified for the data reviews. IS responses met the criteria as described above, with the exception of the IS responses in the data reviews discussed further in Appendix D.

Analytical data that required qualification based on internal standard (IS) data are included in the table below. Analytical data reported as non-detect and associated with internal standard recoveries above evaluation criteria, indicating a possible high bias, did not require qualification.

Sample ID	Parameter	Analyte	Qualification
PMA-MW-3M-0210	PCBs	Monochlorobiphenyl	J
PMA-MW-1S-0210	PCBs	All PCB nondetects	UJ
PMA-MW-4S-0210	PCBs	Monochlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Dichlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Tetrachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Pentachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Heptachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Octachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Nonachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	DCB Decachlorobiphenyl	J
PMA-MW-4S-0210-DL	PCBs	Trichlorobiphenyl	J
PMA-MW-4S-0210-DL	PCBs	Hexachlorobiphenyl	J

### 9.0 RESULTS REPORTED FROM DILUTIONS

Sample PMA-MW-4S-0210 was diluted due to abundance of target analytes. The diluted sample results for PCBs were reported at the lowest possible reporting limit.



# Appendix D **Groundwater Analytical Results (with Data Review Sheets)**

### SDG KPM037

## **Results of Samples from Monitoring Wells:**

PMA-MW-1M

PMA-MW-1S

PMA-MW-2M

PMA-MW-2S

PMA-MW-3M

PMA-MW-3S

PMA-MW-4D

PMA-MW-4S

PMA-MW-5M

PMA-MW-6D

# Solutia Krummrich Data Review WGK PCB GW Quality 1Q10

**Laboratory SDG: KPM037** 

Reviewer: Elizabeth Kunkel Date Reviewed: 4/15/2010

**Guidance: USEPA National Functional Guidelines for Superfund Organic** 

**Methods Data Review 2008** 

Applicable Work Plan: Revised PCB Groundwater Quality Assessment (Solutia

2009)

Sample Identification	Sample Identification
PMA-MW-1S-0210	PMA-MW-1M-0210
PMA-MW-2M-0210	PMA-MW-2M-0210-AD
PMA-MW-2S-0210-EB	PMA-MW-2S-0210
PMA-MW-5M-0210	PMA-MW-6D-0210
PMA-MW-3M-0210	PMA-MW-3S-0210
PMA-MW-4D-0210	PMA-MW-4S-0210

### 1.0 Data Package Completeness

Were all items delivered as specified in the QAPP and COC as appropriate?
Yes

### 2.0 Laboratory Case Narrative \ Cooler Receipt Form

Were problems noted in the laboratory case narrative or cooler receipt form?

Yes, the laboratory case narrative indicated that PCB surrogates were diluted out and not recovered in sample PMA-MW-4S-0210. Sample PMA-MW-3S-0210 was reextracted outside holding time criteria. Additionally, PCB surrogates were outside evaluation criteria in sample PMA-MW-1S-0210 and the equipment blank. Internal standard recoveries were outside evaluation criteria in several samples. Sample PMA-MW-4S-0210 was diluted due to abundance of target analytes. These issues are addressed further in the appropriate sections below.

The cooler receipt form indicated that four out of five coolers were received by the laboratory at temperatures below the  $4^{\circ}$ C  $\pm$   $2^{\circ}$ C criteria. Samples received were in good condition and not frozen; therefore, no qualification of data was required.

### 3.0 Holding Times

Were samples extracted/analyzed within applicable limits?

No, sample PMA-MW-3S-0210 was re-extracted approximately 23 days outside holding time criteria (7 days) due to loss of internal standards from the original extract. Professional judgment was used to not reject data due to the stability of PCBs.

Qualifications due to hold time criteria are included in the table below:

Sample ID	Parameter	Analyte	Qualification
PMA-MW-3S-0210	PCBs	Monochlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Dichlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Trichlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Tetrachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Pentachlrobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Hexachlrobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Heptachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Octachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	Nonachlorobiphenyl	UJ
PMA-MW-3S-0210	PCBs	DCB Decachlorobiphenyl	UJ

### 4.0 Blank Contamination

Were any analytes detected in the Method Blanks, Field Blanks or Trip Blanks? No

### 5.0 Laboratory Control Sample

Were LCS recoveries within evaluation criteria?

Yes

### 6.0 Surrogate Recoveries

Were surrogate recoveries within evaluation criteria?

No, surrogates were diluted out and not recovered in sample PMA-MW-4S-0210-DL. No qualification of data was required.

Sample ID	Parameter	Surrogate	Recovery	Criteria
PMA-MW-1S-0210	PCBs	Decachlorobiphenyl-13C <sub>12</sub>	128	25-113
PMA-MW-2S-0210-EB	PCBs	Decachlorobiphenyl-13C <sub>12</sub>	179	25-113

Analytical data reported as non-detect and associated with surrogate recoveries above evaluation criteria indicating a possible high bias did not require qualification. Equipment blank, PMA-MW-2S-0210-EB is a quality control sample and does not require qualification. No qualification of data was required.

### 7.0 Matrix Spike and Matrix Spike Duplicate Recoveries

Were MS/MSD samples collected as part of this SDG?

Yes, sample PMA-MW-1S-0210 was spiked and analyzed for PCBs.

Were MS/MSD recoveries within evaluation criteria?

Yes

### 8.0 Internal Standard (IS) Recoveries

Were internal standard area recoveries within evaluation criteria?

Sample ID	Parameter	Analyte	IS Area Recovery	IS Criteria
MB 680-161622/17-A	PCBs	Phenanthrene-d <sub>10</sub>	5,149	8,678-12,397
LCS 680-161622/18-A	PCBs	Chrysene-d <sub>12</sub>	49,796	22,917-42,561
PMA-MW-6D-0210	PCBs	Chrysene-d <sub>12</sub>	54,072	22,917-42,561
PMA-MW-3M-0210	PCBs	Phenanthrene-d <sub>10</sub>	19,190	8,678-12,397
PMA-MW-3M-0210	PCBs	Chrysene-d <sub>12</sub>	87,871	22,917-42,561
PMA-MW-1S-0210	PCBs	Phenanthrene-d <sub>10</sub>	3,625	11,033-20,491
PMA-MW-1S-0210-MS	PCBs	Chrysene-d <sub>12</sub>	68,490	33,335-61,909
PMA-MW-2M-0210	PCBs	Chrysene-d <sub>12</sub>	72,314	33,335-61,909
PMA-MW-2M-0210-AD	PCBs	Phenanthrene-d <sub>10</sub>	10,393	11,033-20,491
PMA-MW-2S-0210-EB	PCBs	Phenanthrene-d <sub>10</sub>	3,787	11,033-20,491
PMA-MW-2S-0210	PCBs	Chrysene-d <sub>12</sub>	69,037	33,335-61,909
PMA-MW-5M-0210	PCBs	Chrysene-d <sub>12</sub>	65,494	33,335-61,909
PMA-MW-4D-0210	PCBs	Phenanthrene-d <sub>10</sub>	17,590	8,350-15,506
PMA-MW-4D-0210	PCBs	Chrysene-d <sub>12</sub>	75,665	31,603-58,691
PMA-MW-4S-0210	PCBs	Phenanthrene-d <sub>10</sub>	74,984	8,350-15,506
PMA-MW-4S-0210	PCBs	Chrysene-d <sub>12</sub>	84,222	31,603-58,691
PMA-MW-4S-0210-DL	PCBs	Phenanthrene-d <sub>10</sub>	36,001	11,910-22,118
PMA-MW-3S-0210	PCBs	Chrysene-d <sub>12</sub>	58,905	31,603-58,691
LCSD 680-163986/5-A	PCBs	Phenanthrene-d <sub>10</sub>	16,840	8,350-15,506
LCSD 680-163986/5-A	PCBs	Chrysene-d <sub>12</sub>	63,198	31,603-58,691

Analytical data that required qualification based on internal standard (IS) data are included in the table below. Analytical data reported as non-detect and associated with internal standard recoveries above evaluation criteria, indicating a possible high bias, did not require qualification. MB 680-161622/17-A, LCS 680-161622/18-A, PMA-MW-1S-0210-MS, PMA-MW-2S-0210-EB, and LCSD 680-163986/5-A are quality control samples and do not require qualification. Internal standard areas for phenanthrene-d<sub>10</sub> and chrysene-d<sub>12</sub> recovered within the initial calibration average internal standard area in samples PMA-MW-6D-0210, PMA-MW-2M-0210, PMA-MW-2M-0210-AD, PMA-MW-2S-0210, PMA-MW-5M-0210, PMA-MW-4D-0210, and PMA-MW-3S-0210; therefore, no qualification of data was required. [Chrysene-d<sub>12</sub> was used in the calibration and quantification of the target compounds and surrogate].

Sample ID	Parameter	Analyte	Qualification
PMA-MW-3M-0210	PCBs	Monochlorobiphenyl	J
PMA-MW-1S-0210	PCBs	All PCB nondetects	UJ
PMA-MW-4S-0210	PCBs	Monochlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Dichlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Tetrachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Pentachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Heptachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	Octachlorobiphenyl	J

Sample ID	Parameter	Analyte	Qualification
PMA-MW-4S-0210	PCBs	Nonachlorobiphenyl	J
PMA-MW-4S-0210	PCBs	DCB Decachlorobiphenyl	J
PMA-MW-4S-0210-DL	PCBs	Trichlorobiphenyl	J
PMA-MW-4S-0210-DL	PCBs	Hexachlorobiphenyl	J

### 9.0 Laboratory Duplicate Results

Were laboratory duplicate samples collected as part of this SDG?
No

### 10.0 Field Duplicate Results

Were field duplicate samples collected as part of this SDG? Yes

Field ID	Field Duplicate ID
PMA-MW-2M-0210	PMA-MW-2M-0210-AD

Were field duplicates within evaluation criteria?

Yes

### 11.0 Sample Dilutions

For samples that were diluted and nondetect, were undiluted results also reported? Not applicable; analytes were detected in samples that were diluted.

### 12.0 Additional Qualifications

Were additional qualifications applied?

No



### ANALYTICAL REPORT

Job Number: 680-55249-1

SDG Number: KPM037

Job Description: WGK PCB GW Quality - 1Q10 - FEB 2010

For:

Solutia Inc.

575 Maryville Centre Dr. Saint Louis, MO 63141

Attention: Mr. Jerry Rinaldi

Lidya gulicia

Approved for release Lidya Gulizia Project Manager I 4/8/2010 11:02 PM

Lidya Gulizia
Project Manager I
Iidya.gulizia@testamericainc.com
04/08/2010

Reviewed

ON

cc: Mr. Thomas Adams Mr. Bob Billman Dave Palmer APR 13 2010 EXK

The test results in this report meet NELAP requirements for parameters for which accreditation is required or available. Any exceptions to the NELAP requirements are noted. Results pertain only to samples listed in this report. This report may not be reproduced, except in full, without the written approval of the laboratory. Questions should be directed to the person who signed this report.

Savannah Certifications and ID #s: A2LA: 0399.01; AL: 41450; ARDEQ: 88-0692; ARDOH; CA: 03217CA; CO; CT: PH0161; DE; FL: E87052; GA: 803; Guam; HI; IL: 200022; IN; IA: 353; KS: E-10322; KY EPPC: 90084; KY UST; LA DEQ: 30690; LA DHH: LA080008; ME: 2008022; MD: 250; MA: M-GA006; MI: 9925; MS; NFESC: 249; NV: GA00006; NJ: GA769; NM; NY: 10842; NC DWQ: 269; NC DHHS: 13701; PA: 68-00474; PR: GA00006; RI: LAO00244; SC: 98001001; TN: TN0296; TX: T104704185; USEPA: GA00006; VT: VT-87052; VA: 00302; WA; WV DEP: 094; WV DHHR: 9950 C; WI DNR: 999819810; WY/EPAR8: 8TMS-Q

TestAmerica Laboratories, Inc.

TestAmerica Savannah 5102 LaRoche Avenue, Savannah, GA 31404 Tel (912) 354-7858 Fax (912) 352-0165 www.testamericainc.com



### Job Narrative 680-55249-1 / SDG KPM037

### Receipt

All samples were received in good condition within temperature requirements.

### GC/MS Semi VOA

Method(s) 680: Sample PMA-MW-4S-0210 (680-55283-5) was diluted due to abundance of target analytes . As such, surrogate recoveries are not reported, and elevated reporting limits (RLs) are provided.

Method(s) 680: Surrogate recovery for the following sample(s) was outside the upper control limit: PMA-MW-1S-0210 (680-55249-1), PMA-MW-2S-0210-EB (680-55249-5). This sample did not contain any target analytes; therefore, re-extraction and/or re-analysis was not performed.

Method(s) 680: The internal standards in the original extract for PMA-MW-3S-0210 (680-55283-3) were lost in the extraction and/or concentration process in the initial extraction and a valid analysis could not be obtained from this extract. The sample was re-extracted outside of holding time and successfully analyzed with acceptable internal standard and surrogate recovery. The results for the extraction outside of holding time are presented in the report.

No other analytical or quality issues were noted.

### Comments

No additional comments.

APR 13 2010 EZK

### **METHOD SUMMARY**

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Description	Lab Location	Method	Preparation Method
Matrix Water			
Polychlorinated Biphenyls (PCBs) (GC/MS) Liquid-Liquid Extraction (Separatory Funnel)	TAL SAV TAL SAV	EPA 680	EPA 680

### Lab References:

TAL SAV = TestAmerica Savannah

### Method References:

EPA = US Environmental Protection Agency

TestAmerica Savannah

### METHOD / ANALYST SUMMARY

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Method	Analyst	Analyst ID
EPA 680	Chamberlain, Kim	KAC

TestAmerica Savannah

### **SAMPLE SUMMARY**

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

			Date/Time	Date/Time
Lab Sample ID	Client Sample ID	Client Matrix	Sampled	Received
680-55249-1	PMA-MW-1S-0210	Water	02/22/2010 1120	02/23/2010 0919
680-55249-1MS	PMA-MW-1S-0210-MS	Water	02/22/2010 1120	02/23/2010 0919
680-55249-1MSD	PMA-MW-1S-0210-MSD	Water	02/22/2010 1120	02/23/2010 0919
680-55249-2	PMA-MW-1M-0210	Water	02/22/2010 1210	02/23/2010 0919
680-55249-3	PMA-MW-2M-0210	Water	02/22/2010 1400	02/23/2010 0919
680-55249-4FD	PMA-MW-2M-0210-AD	Water	02/22/2010 1400	02/23/2010 0919
680-55249-5EB	PMA-MW-2S-0210-EB	Water	02/22/2010 1415	02/23/2010 0919
680-55249-6	PMA-MW-2S-0210 /	Water	02/22/2010 1445	02/23/2010 0919
680-55249-7	PMA-MW-5M-0210 /	Water	02/22/2010 1545	02/23/2010 0919
680-55283-1	PMA-MW-6D-0210 /	Water	02/23/2010 1020	02/24/2010 0919
680-55283-2	PMA-MW-3M-0210 /	Water	02/23/2010 1140	02/24/2010 0919
680-55283-3	PMA-MW-3S-0210 /	Water	02/23/2010 1230	02/24/2010 0919
680-55283-4	PMA-MW-4D-0210	Water	02/23/2010 1405	02/24/2010 0919
680-55283-5	PMA-MW-4S-0210	Water	02/23/2010 1530	02/24/2010 0919

# **SAMPLE RESULTS**

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-1S-0210

Lab Sample ID: Client Matrix:

680-55249-1

Water

Date Sampled: 02/22/2010 1120

Date Received: 02/23/2010 0919

Method: Preparation: 680 680 Analysis Batch: 680-164886 Prep Batch: 680-161622

Instrument ID: Lab File ID:

MSY N/A

Dilution: Date Analyzed:

1.0 03/31/2010 0156 Initial Weight/Volume: Final Weight/Volume:

1030 mL

Date Prepared:

02/25/2010 1417

Injection Volume:

1 mL

Analyte	Result (ug/L)	Qualifier	RL
Monochlorobiphenyl	0.097	~ uJ"	0.097
Dichlorobiphenyl	0.097	` ປປູ"	0.097
Trichlorobiphenyl	0.097	ุ๊นบี"	0.097
Tetrachlorobiphenyl	0.19	ันวี"	0.19
Pentachlorobiphenyl	0.19	~u2"	0.19
Hexachlorobiphenyl	0.19	" <b>u</b> J"	0.19
Heptachlorobiphenyl	0.29	"uJ"	0.29
Octachlorobiphenyl	0.29	<u></u> "u5"	0.29
Nonachlorobiphenyl	0.49	∿ u5″	0.49
DCB Decachlorobiphenyl	0.49	"ut"	0.49
Surrogate	%Rec	Qualifier	Acceptance Limits
Decachlorobiphenyl-13C12	(128)	(x)	25 113

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID: PMA-MW-1M-0210

 Lab Sample ID:
 680-55249-2
 Date Sampled: 02/22/2010 1210

 Client Matrix:
 Water
 Date Received: 02/23/2010 0919

680 Polychlorinated Biphenyls (PCBs) (GC/MS)

Method: 680 Analysis Batch: 680-164886 Instrument ID: MSY 680 Prep Batch: 680-161622 Lab File ID: N/A Preparation: Initial Weight/Volume: Dilution: 1.0 1060 mL 03/31/2010 0328 Date Analyzed: Final Weight/Volume: 1 mL

Date Prepared: 02/25/2010 1417 Injection Volume:

Result (ug/L) Qualifier RL Analyte Monochlorobiphenyl 0.20 0.094 U Dichlorobiphenyl 0.094 0.094 Trichlorobiphenyl 0.094 U 0.094 U Tetrachlorobiphenyl 0.19 0.19 U Pentachlorobiphenyl 0.19 0.19 0.19 U Hexachlorobiphenyl 0.19 Heptachlorobiphenyl 0.28 U 0.28 Octachlorobiphenyl 0.28 U 0.28 0.47 U 0.47 Nonachlorobiphenyl DCB Decachlorobiphenyl 0.47 U 0.47 %Rec Qualifier Acceptance Limits Surrogate

Decachlorobiphenyl-13C12 67 25 - 113

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-2M-0210

Lab Sample ID:

680-55249-3

Client Matrix:

Water

02/25/2010 1417

5249-3

Date Sampled: 02/22/2010 1400

Date Received: 02/23/2010 0919

680 Polychlorinated	<b>Biphenyls</b>	(PCBs)	(GC/MS)
---------------------	------------------	--------	---------

Method: Preparation: Dilution:

Date Analyzed:

Date Prepared:

680 680 1.0

1.0 04/01/2010 0359 Analysis Batch: 680-164886 Prep Batch: 680-161622 Instrument ID: Lab File ID: MSY N/A 1060 m

Initial Weight/Volume: Final Weight/Volume:

1060 mL 1 mL

Injection Volume:

Result (ug/L) Qualifier RL Analyte 2.4 0.094 Monochlorobiphenyl U 0.094 Dichlorobiphenyl 0.094 0.094 U 0.094 Trichlorobiphenyl 0.19 U 0.19 Tetrachlorobiphenyl 0.19 U 0.19 Pentachlorobiphenyl 0.19 U 0.19 Hexachlorobiphenyl Heptachlorobiphenyl 0.28 U 0.28 0.28 U 0.28 Octachlorobiphenyl 0.47 U 0.47 Nonachlorobiphenyl DCB Decachlorobiphenyl 0.47 U 0.47 %Rec Qualifier Acceptance Limits Surrogate Decachlorobiphenyl-13C12 73 25 - 113

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-2M-0210-AD

Lab Sample ID:

680-55249-4FD

Client Matrix:

Water

Date Sampled: 02/22/2010 1400

Date Received: 02/23/2010 0919

680	Polychlorinate	d Rinhanyle	(PCRs)	(GC/MS)
000	F UIV CITIOTITIALE	u Dibileliais	(FCDS)	(GCH4IC)

Method: Preparation: 680 680 Analysis Batch: 680-164886

Instrument ID: Lab File ID:

MSY N/A

Dilution:

1.0

Prep Batch: 680-161622

Initial Weight/Volume: Final Weight/Volume:

1050 mL

Date Analyzed: Date Prepared: 04/01/2010 0430 02/25/2010 1417

1 mL

Injection Volume:

Analyte	Result (ug/L)	Qualifier	RL
Monochlorobiphenyl	2.4		0.095
Dichlorobipheny!	0.095	U	0.095
Trichlorobiphenyl	0.095	U	0.095
Tetrachlorobiphenyl	0.19	U	0.19
Pentachlorobiphenyl	0.19	U	0.19
Hexachlorobiphenyl	0.19	U	0.19
Heptachlorobiphenyl	0.29	U	0.29
Octachlorobiphenyl	0.29	U	0.29
Nonachlorobiphenyl	0.48	U	0.48
DCB Decachlorobiphenyl	0.48	U	0.48
Surrogate	%Rec	Qualifier	Acceptance Limits
Decachlorobiphenyl-13C12	76		25 - 113

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-2S-0210-EB

Lab Sample ID:

680-55249-5EB

Client Matrix:

Water

Date Sampled: 02/22/2010 1415 Date Received: 02/23/2010 0919

680 Polychlorinated Biphenyls (PCBs) (GC/MS)

Method: Preparation: 680 680 Analysis Batch: 680-164886 Prep Batch: 680-161622

Instrument ID: Lab File ID:

MSY N/A

Dilution: Date Analyzed:

1.0

Initial Weight/Volume: Final Weight/Volume:

1050 mL 1 mL

Date Prepared:

04/01/2010 0501 02/25/2010 1417

Injection Volume:

Analyte		Result (ug/L)	Qualifier	RL
Monochlorobiphenyl		0.095	U	0.095
Dichlorobiphenyl		0.095	U	0.095
Trichlorobiphenyl		0.095	U	0.095
Tetrachlorobiphenyl		0.19	U	0.19
Pentachlorobiphenyl		0.19	U	0.19
Hexachlorobiphenyl		0.19	U	0.19
Heptachlorobiphenyl		0.29	U	0.29
Octachlorobiphenyl		0.29	U	0.29
Nonachlorobiphenyl		0.48	U	0.48
DCB Decachlorobiphe	nyl	0.48	U	0.48

Decachlorobiphenyl-13C12

Surrogate

%Rec 179

Qualifier

Acceptance Limits 25 - 113

Job Number: 680-55249-1 Client: Solutia Inc.

Sdg Number: KPM037

Client Sample ID:

PMA-MW-2S-0210

Lab Sample ID:

680-55249-6

Client Matrix:

Water

Date Sampled: 02/22/2010 1445

Date Received: 02/23/2010 0919

680 Polychlorinated E	Siphenyls (	(PCBs)	(GC/MS)
-----------------------	-------------	--------	---------

Method: Preparation: 680 680 Analysis Batch: 680-164886 Prep Batch: 680-161622

Instrument ID: Lab File ID:

MSY N/A

Dilution:

1.0

Initial Weight/Volume:

1050 mL

Date Analyzed: Date Prepared: 04/01/2010 0532 02/25/2010 1417

Final Weight/Volume:

1 mL

Injection Volume:

Analyte	Result (ug/L)	Qualifier	RL
Monochlorobiphenyl	0.095	U	0.095
Dichlorobiphenyl	0.095	U	0.095
Trichlorobiphenyl	0.095	U	0.095
Tetrachlorobiphenyl	0.19	U	0.19
Pentachlorobiphenyl	0.19	U	0.19
Hexachlorobiphenyl	0.19	U	0.19
Heptachlorobiphenyl	0.29	U	0.29
Octachlorobiphenyl	0.29	U	0.29
Nonachlorobiphenyl	0.48	U	0.48
DCB Decachlorobiphenyl	0.48	U	0.48
Surrogate	%Rec	Qualifier	Acceptance Limits
Decachlorobiphenyl-13C12	81		25 - 113

Client: Solutia Inc.

Decachlorobiphenyl-13C12

Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-5M-0210

Lab Sample ID:

680-55249-7

Client Matrix:

Water

Date Sampled: 02/22/2010 1545 Date Received: 02/23/2010 0919

25 - 113

		680 Polychlorinated Biphenyls (P	CBs) (GC/MS)	1	
Method: Preparation: Dilution: Date Analyzed: Date Prepared:	680 680 1.0 04/01/2010 0603 02/25/2010 1417	Analysis Batch: 680-164886 Prep Batch: 680-161622	Lal Init Fin	strument ID: b File ID: tial Weight/Volume: nal Weight/Volume: ection Volume:	MSY N/A 1050 mL 1 mL
Analyte		Result (ug/L)	Qualifier		RL
Monochlorobiphen	nyl	0.095	U		0.095
Dichlorobiphenyl		0.095	U		0.095
Trichlorobiphenyl		0.095	U		0.095
Tetrachlorobiphen	yl	0.19	U		0.19
Pentachlorobipher	nyl	0.19	U		0.19
Hexachlorobiphen	yl	0.19	U		0.19
Heptachlorobipher	nyl	0.29	U		0.29
Octachlorobipheny	yl .	0.29	U		0.29
Nonachlorobiphen	yl	0.48	U		0.48
DCB Decachlorob	iphenyl	0.48	U		0.48
Surrogate		%Rec	Qualifier	Acceptar	ice Limits

87

Job Number: 680-55249-1 Client: Solutia Inc.

Sdg Number: KPM037

Client Sample ID:

PMA-MW-6D-0210

Lab Sample ID: Client Matrix:

680-55283-1

03/31/2010 2016

02/25/2010 1417

Water

Date Sampled: 02/23/2010 1020

Date Received: 02/24/2010 0919

680 Polychlorinated Biphenyls (PCBs) (GC/MS)

Method: Preparation:

Date Analyzed:

Date Prepared:

Dilution:

680 680 1.0

Analysis Batch: 680-164886 Prep Batch: 680-161622

Instrument ID: Lab File ID:

MSY N/A 1050 mL

Initial Weight/Volume: Final Weight/Volume:

1 mL

Injection Volume:

Qualifier RL Result (ug/L) Analyte 0.19 0.095 Monochlorobiphenyl 0.095 U 0.095 Dichlorobiphenyl U 0.095 Trichlorobiphenyl 0.095 U 0.19 0.19 Tetrachlorobiphenyl U 0.19 0.19 Pentachlorobiphenyl U 0.19 0.19 Hexachlorobiphenyl 0.29 U 0.29 Heptachlorobiphenyl U 0.29 Octachlorobiphenyl 0.29 U 0.48 0.48 Nonachlorobiphenyl DCB Decachlorobiphenyl U 0.48 0.48 %Rec Qualifier Acceptance Limits Surrogate 25 - 113 Decachlorobiphenyl-13C12 77

Job Number: 680-55249-1 Client: Solutia Inc.

Sdg Number: KPM037

Client Sample ID:

PMA-MW-3M-0210

Lab Sample ID:

680-55283-2

Client Matrix:

Water

Date Sampled: 02/23/2010 1140

Date Received: 02/24/2010 0919

680 Poly	chlorinated	<b>Biphenyls</b>	(PCBs)	(GC/MS)
----------	-------------	------------------	--------	---------

Method: Preparation: 680 680 Analysis Batch: 680-164886 Prep Batch: 680-161622

Instrument ID: Lab File ID:

MSY N/A

Dilution: Date Analyzed: 1.0 03/31/2010 2047

Initial Weight/Volume: Final Weight/Volume:

1060 mL

Date Prepared:

02/25/2010 1417

1 mL

Injection Volume:

Analyte	Result (ug/L)	Qualifier	RL
Monochlorobiphenyl	0.87	23"	0.094
Dichlorobiphenyl	0.094	Ŭ	0.094
Trichlorobiphenyl	0.094	U	0.094
Tetrachlorobiphenyl	0.19	U	0.19
Pentachlorobiphenyl	0.19	U	0.19
Hexachlorobiphenyl	0.19	U	0.19
Heptachlorobiphenyl	0.28	U	0.28
Octachlorobiphenyl	0.28	U	0.28
Nonachlorobiphenyl	0.47	U	0.47
DCB Decachlorobiphenyl	0.47	U	0.47
Surrogate	%Rec	Qualifier	Acceptance Limits
Decachlorobiphenyl-13C12	69		25 - 113

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-3S-0210

Lab Sample ID:

680-55283-3

Client Matrix:

Water

Date Sampled: 02/23/2010 1230

Date Received: 02/24/2010 0919

Method: Preparation:

Analyte

680 680 Analysis Batch: 680-164886

Instrument ID: Lab File ID:

MSY N/A

Dilution:

Monochlorobiphenyl

Dichlorobiphenyl

Trichlorobiphenyl

Tetrachlorobiphenyl

Pentachlorobiphenyl

Hexachlorobiphenyl

Heptachlorobiphenyl

Octachlorobiphenyl

Nonachlorobiphenyl

1.0

Prep Batch: 680-163986

Initial Weight/Volume: Final Weight/Volume:

1050 mL 1.0 mL

Injection Volume:

04/01/2010 1923 Date Analyzed: Date Prepared:

03/25/2010 1401

Result (ug/L) Qualifier RL سلهلا us" 0.095 0.095 ~ リブ" 0.095 \_<del>UH</del> 0.095 JH " UJ" 0.095 0.095 ML ~ M2... 0.19 0.19 HH & UJ 0.19 0.19 JHH LUJ 0.19 0.19 UH" UJ 0.29 0.29 JHH "UJ 0.29 0.29 TU' THE 0.48 0.48 TH ~ 112" 0.48 0.48

Qualifier

Surrogate Decachlorobiphenyl-13C12

DCB Decachlorobiphenyl

%Rec 73

Acceptance Limits 25 - 113

Job Number: 680-55249-1 Client: Solutia Inc.

Sdg Number: KPM037

Client Sample ID:

PMA-MW-4D-0210

Lab Sample ID:

680-55283-4

Client Matrix:

Water

02/25/2010 1417

Date Sampled: 02/23/2010 1405 Date Received: 02/24/2010 0919

680 Polychlorinated Biphenyls (PCBs) (GC/MS)

Method: Preparation:

Date Prepared:

680 680

Analysis Batch: 680-164886

Instrument ID: Lab File ID:

MSY N/A

Dilution: Date Analyzed:

1.0 04/01/2010 1618 Prep Batch: 680-161622

Initial Weight/Volume:

1060 mL

Final Weight/Volume:

1 mL

Injection Volume:

Result (ug/L) Qualifier RLAnalyte 0.26 0.094 Monochlorobiphenyl 0.28 0.094 Dichlorobiphenyl 0.094 U 0.094 Trichlorobiphenyl 0.19 U 0.19 Tetrachlorobiphenyl 0.19 U 0.19 Pentachlorobiphenyl 0.19 U 0.19 Hexachlorobiphenyl Heptachlorobiphenyl 0.28 U 0.28 0.28 U 0.28 Octachlorobiphenyl 0.47 U 0.47 Nonachlorobiphenyl DCB Decachlorobiphenyl 0.47 U 0.47 %Rec Qualifier Acceptance Limits Surrogate

Decachlorobiphenyl-13C12

59

25 - 113

\* "Do not use this data. Use all other data.

### **Analytical Data**

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-4S-0210

Lab Sample ID:

680-55283-5

Client Matrix:

Water

Date Sampled: 02/23/2010 1530 Date Received: 02/24/2010 0919

680 Polychlorinated	Biphenyls	(PCBs)	(GC/MS)
---------------------	-----------	--------	---------

Method: Preparation: 680 680 Analysis Batch: 680-164886

69

Instrument ID: Lab File ID:

MSY N/A

Dilution:

1.0

Prep Batch: 680-161622

Initial Weight/Volume: Final Weight/Volume:

25 - 113

1030 mL 1 mL

Date Analyzed: Date Prepared:

Decachlorobiphenyl-13C12

04/01/2010 1649 02/25/2010 1417

Injection Volume:

Analyte	Result (ug/L)	Qualifier	RL
Monochlorobiphenyl	1.4	~ J"	0.097
Dichlorobiphenyl	6.8	~T"	0.097
Trichlorobiphenyl	21	<u>E</u>	0.097
Tetrachlorobiphenyl	52	~ 2"	0.19
Pentachlorobiphenyl	34	ري مي سري	0.19
	<del></del>	<u>Ĕ</u>	<del></del>
Heptachlorobiphenyl	33	<sup>رو</sup> 2″,	0.29
Octachlorobiphenyl	8.3	"J"	0.29
Nonachlorobiphenyl	1.2	ر ک <u>"</u>	0.49
DCB Decachlorobiphenyl	0.85	c J"	0.49
Surrogate	%Rec	Qualifier	Acceptance Limits

APR 13 2010 EK

The Community of the se results only. All other data from the 1.0 x dilution analysis." was reported

### **Analytical Data**

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Client Sample ID:

PMA-MW-4S-0210

Lab Sample ID:

680-55283-5

Client Matrix:

Water

Date Sampled: 02/23/2010 1530 Date Received: 02/24/2010 0919

### 680 Polychlorinated Biphenyls (PCBs) (GC/MS)

Method: Preparation: 680

Analysis Batch: 680-164886

Instrument ID: Lab File ID:

MSY

Dilution:

680 10

Prep Batch: 680-161622

N/A

Date Analyzed:

Run Type: DL

Initial Weight/Volume: Final Weight/Volume:

1030 mL 1 mL

Date Prepared:

04/06/2010 1715 02/25/2010 1417

Injection Volume:

Analyte	Result (ug/L)	Qualifier	RL
- Monochlorobiphenyl	1.3	B	0.97
- Dichlorobiphenyl		D	0.97
Trichlorobiphenyl	14	D . 7.	0.97
Tetrachlorobiphenyl	43	D	1.9
Pentachlorobiphenyl	<del></del>	D	1.9
Hexachlorobiphenyl	49	.P "J"	1.9
Heptachlorobiphenyl	42	D	2.9
Octachlorobiphenyl-	7.2	D	2.9
- Nonachlorobiphenyl	4.9	<del></del>	4.9
DCB Decachlerobiphenyl	4.9	<del></del>	4.9

Surrogate	%Rec	Qualifier	Acceptance Limits	
Decachlorobiphenyl-13C12	0	D	25 - 113	

### **DATA REPORTING QUALIFIERS**

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Lab Section	Qualifier	Description
GC/MS Semi VOA		
	U	Indicates the analyte was analyzed for but not detected.
	E	Result exceeded calibration range.
	н	Sample was prepped or analyzed beyond the specified holding time
	X	Surrogate is outside control limits
	D	Surrogate or matrix spike recoveries were not obtained because the extract was diluted for analysis; also compounds analyzed at a dilution may be flagged with a D.

# **QUALITY CONTROL RESULTS**

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

# **QC Association Summary**

Lab Sample ID	Client Sample ID	Report Basis	Client Matrix	Method	Prep Batch
GC/MS Semi VOA					
Prep Batch: 680-161622					
_CS 680-161622/18-A	Lab Control Sample	Т	Water	680	
MB 680-161622/17-A	Method Blank	Т	Water	680	
880-55249-1	PMA-MW-1S-0210	Т	Water	680	
880-55249-1MS	Matrix Spike	Т	Water	680	
80-55249-1MSD	Matrix Spike Duplicate	Т	Water	680	
80-55249-2	PMA-MW-1M-0210	Т	Water	680	
80-55249-3	PMA-MW-2M-0210	Т	Water	680	
80-55249-4FD	PMA-MW-2M-0210-AD	Т	Water	680	
80-55249-5EB	PMA-MW-2S-0210-EB	Т	Water	680	
80-55249-6	PMA-MW-2S-0210	Т	Water	680	
80-55249-7	PMA-MW-5M-0210	Т	Water	680	
80-55283-1	PMA-MW-6D-0210	Т	Water	680	
80-55283-2	PMA-MVV-3M-0210	Т	Water	680	
80-55283-4	PMA-MW-4D-0210	Т	Water	680	
80-55283-5	PMA-MW-4S-0210	Т	Water	680	
80-55283-5DL	PMA-MW-4S-0210	Т	Water	680	
Prep Batch: 680-163986					
CS 680-163986/4-A	Lab Control Sample	Т	Water	680	
CSD 680-163986/5-A	Lab Control Sample Duplicate	Т	Water	680	
1B 680-163986/3-A	Method Blank	Т	Water	680	
80-55283-3	PMA-MW-3S-0210	Т	Water	680	
Analysis Batch:680-16488	6	`			
CS 680-161622/18-A	Lab Control Sample	Т	Water	680	680-161622
1B 680-161622/17-A	Method Blank	Т	Water	680	680-161622
CS 680-163986/4-A	Lab Control Sample	Т	Water	680	680-163986
CSD 680-163986/5-A	Lab Control Sample Duplicate	Т	Water	680	680-163986
IB 680-163986/3-A	Method Blank	Т	Water	680	680-163986
80-55249-1	PMA-MW-1S-0210	Т	Water	680	680-161622
80-55249-1MS	Matrix Spike	T	Water	680	680-161622
80-55249-1MSD	Matrix Spike Duplicate	Т	Water	680	680-161622
80-55249-2	PMA-MW-1M-0210	Т	Water	680	680-161622
80-55249-3	PMA-MW-2M-0210	Т	Water	680	680-161622
80-55249-4FD	PMA-MW-2M-0210-AD	Т	Water	680	680-161622
80-55249-5EB	PMA-MW-2S-0210-EB	Т	Water	680	680-161622
80-55249-6	PMA-MW-2S-0210	Т	Water	680	680-161622
80-55249-7	PMA-MW-5M-0210	Т	Water	680	680-161622
80-55283-1	PMA-MW-6D-0210	T	Water	680	680-161622
80-55283-2	PMA-MW-3M-0210	Ť	Water	680	680-161622
80-55283-3	PMA-MW-3S-0210	Ť	Water	680	680-163986
80-55283-4	PMA-MW-4D-0210	Ť	Water	680	680-161622
80-55283-5	PMA-MW-4S-0210	Ť	Water	680	680-161622
	PMA-MW-4S-0210	Ť	Water	680	680-161622

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

### **QC Association Summary**

Report

Lab Sample ID Client Sample ID Basis Client Matrix Method Prep Batch

Report Basis

T = Total

Job Number: 680-55249-1 Sdg Number: KPM037

# **Surrogate Recovery Report**

#### 680 Polychlorinated Biphenyls (PCBs) (GC/MS)

#### Client Matrix: Water

Client: Solutia Inc.

		13DCB
Lab Sample ID	Client Sample ID	%Rec
680-55249-1	PMA-MW-1S-0210	128X
680-55249-2	PMA-MW-1M-0210	67
680-55249-3	PMA-MW-2M-0210	73
680-55249-4	PMA-MW-2M-0210-A D	76
680-55249-5	PMA-MW-2S-0210-E B	179X
680-55249-6	PMA-MW-2S-0210	81
680-55249-7	PMA-MW-5M-0210	87
680-55283-1	PMA-MW-6D-0210	77
680-55283-2	PMA-MW-3M-0210	69
680-55283-3	PMA-MW-3S-0210	73
680-55283-4	PMA-MW-4D-0210	59
680-55283-5	PMA-MW-4S-0210	69
680-55283-5 DL	PMA-MW-4S-0210 DL	OD
MB 680-161622/17-A		104
MB 680-163986/3-A		84
LCS 680-161622/18-A		70
LCS 680-163986/4-A		84
LCSD 680-163986/5-A		70
680-55249-1 MS	PMA-MW-1S-0210 MS	75
680-55249-1 MSD	PMA-MW-1S-0210 MSD	107

Surrogate	Acceptance Limits
13DCB = Decachlorobiphenyl-13C12	25-113

APR 13 2010 EZK

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Method Blank - Batch: 680-161622 Method: 680 Preparation: 680

Analysis Batch: 680-164886 Lab Sample ID: MB 680-161622/17-A Instrument ID: MSY Prep Batch: 680-161622 Client Matrix: Water Lab File ID: N/A

Units: ug/L Dilution: 1.0 Initial Weight/Volume: 1000 mL 03/31/2010 1914 Date Analyzed: Final Weight/Volume: 1 mL

Date Prepared: 02/25/2010 1417 Injection Volume:

Analyte	Result	Qual	RL
Monochlorobiphenyl	0.10	U	0.10
Dichlorobiphenyl	0.10	U	0.10
Trichlorobiphenyl	0.10	U	0.10
Tetrachlorobiphenyl	0.20	U	0.20
Pentachlorobiphenyl	0.20	U	0.20
Hexachlorobiphenyl	0.20	U	0.20
Heptachlorobiphenyl	0.30	U	0.30
Octachlorobiphenyl	0.30	U	0.30
Nonachlorobiphenyl	0.50	U	0.50
DCB Decachlorobiphenyl	0.50	U	0.50
Surrogate	% Rec		Acceptance Limits
December of the Property of th	104		25 112

Decachlorobiphenyl-13C12 104 25 - 113

Lab Control Sample - Batch: 680-161622 Method: 680 Preparation: 680

Analysis Batch: 680-164886 Lab Sample ID: LCS 680-161622/18-A Instrument ID: MSY

Prep Batch: 680-161622 Client Matrix: Water Lab File ID: N/A Units: ug/L Dilution: Initial Weight/Volume:

1000 mL 03/31/2010 1945 Final Weight/Volume: Date Analyzed: 1 mL

Date Prepared: 02/25/2010 1417 Injection Volume:

Spike Amount Result % Rec. Limit Qual Analyte Monochlorobiphenyl 2.00 0.649 32 10 - 125 Dichlorobiphenyl 2.00 0.738 37 10 - 110 Trichlorobiphenyl 2.00 0.792 40 17 - 110 Tetrachlorobiphenyl 4.00 1.64 41 18 - 110 Pentachlorobiphenyl 4.00 2.12 53 34 - 110 Hexachlorobiphenyl 4.00 2.06 51 31 - 110 Heptachlorobiphenyl 6.00 3.06 51 33 - 110 Octachlorobiphenyl 6.00 3.44 57 33 - 110 DCB Decachlorobiphenyl 10.0 6.28 63 26 - 115 % Rec Surrogate Acceptance Limits

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Matrix Spike/

Matrix Spike Duplicate Recovery Report - Batch: 680-161622

Method: 680

MS Lab Sample ID:

680-55249-1

Preparation: 680

Client Matrix:

Water

Analysis Batch: 680-164886

Instrument ID: MSY

Prep Batch: 680-161622

Lab File ID:

Dilution:

1.0

N/A

Date Analyzed:

04/01/2010 0227

Initial Weight/Volume:

1060 mL 1 mL

Date Prepared:

02/25/2010 1417

Final Weight/Volume: Injection Volume:

MSD Lab Sample ID:

Water

680-55249-1

Analysis Batch: 680-164886

Instrument ID: MSY

Client Matrix: Dilution:

1.0

Prep Batch: 680-161622

Lab File ID: N/A Initial Weight/Volume:

1050 mL

Date Analyzed: Date Prepared: 04/01/2010 0257 02/25/2010 1417 Final Weight/Volume: Injection Volume:

1 mL

	9	<u> 6 Rec.</u>					
Analyte	MS	MSD	Limit	RPD	RPD Limit	MS Qual	MSD Qual
Monochlorobiphenyl	41	55	10 - 125	30	40		alan dialan diagnologica di mandri di diagnosti di diagnosti di diagnosti di d
Dichlorobiphenyl	45	63	10 - 110	34	40		
Trichlorobiphenyl	48	69	17 - 110	36	40		
Tetrachlorobiphenyl	46	66	18 - 110	37	40		
Pentachlorobiphenyl	56	79	34 - 110	36	40		
Hexachlorobiphenyl	54	76	31 - 110	35	40		
Heptachlorobiphenyl	55	77	33 - 110	34	40		
Octachlorobiphenyl	62	86	33 - 110	34	40		
DCB Decachlorobiphenyl	68	95	26 - 115	34	40		
Surrogate		MS % Rec	MSD	% Rec	Acce	eptance Limits	
Decachlorobiphenyl-13C12		75	107		2	5 - 113	

Client: Solutia Inc.

Job Number: 680-55249-1

Sdg Number: KPM037

Method Blank - Batch: 680-163986 Method: 680
Preparation: 680

Lab Sample ID: MB 680-163986/3-A Analysis Batch: 680-164886 Instrument ID: MSY Client Matrix: Water Prep Batch: 680-163986 Lab File ID: N/A

Dilution: 1.0 Units: ug/L Initial Weight/Volume: 1000 mL
Date Analyzed: 04/01/2010 1720 Final Weight/Volume: 1.0 mL

Date Prepared: 03/25/2010 1401 Injection Volume:

Analyte	Result	Qual	RL
Monochlorobiphenyl	0.10	U	0.10
Dichlorobiphenyl	0.10	U	0.10
Trichlorobiphenyl	0.10	U	0.10
Tetrachlorobiphenyl	0.20	U	0.20
Pentachlorobiphenyl	0.20	U	0.20
Hexachlorobiphenyl	0.20	U	0.20
Heptachlorobiphenyl	0.30	U	0.30
Octachlorobiphenyl	0.30	U	0.30
Nonachlorobiphenyl	0.50	U	0.50
DCB Decachlorobiphenyl	0.50	U	0.50
Surrogate	% Rec	Ac	cceptance Limits
Decachlorobiphenyl-13C12	84		25 - 113

APR 13 2010 EXK

Client: Solutia Inc. Job Number: 680-55249-1

Sdg Number: KPM037

Lab Control Sample/ Method: 680
Lab Control Sample Duplicate Recovery Report - Batch: 680-163986 Preparation: 680

LCS Lab Sample ID: LCS 680-163986/4-A Analysis Batch: 680-164886 Instrument ID: MSY Client Matrix: Water Prep Batch: 680-163986 Lab File ID: N/A

Dilution: 1.0 Units: ug/L Initial Weight/Volume: 1000 mL Date Analyzed: 04/01/2010 1751 Final Weight/Volume: 1.0 mL

Date Prepared: 03/25/2010 1401 Injection Volume:

LCSD Lab Sample ID: LCSD 680-163986/5-A Analysis Batch: 680-164886 Instrument ID: MSY Client Matrix: Water Prep Batch: 680-163986 Lab File ID: N/A

 Dilution:
 1.0
 Units: ug/L
 Initial Weight/Volume:
 1000 mL

 Date Analyzed:
 04/01/2010 1822
 Final Weight/Volume:
 1.0 mL

 Date Prepared:
 03/25/2010 1401
 Injection Volume:
 1.0 mL

% Rec. Analyte LCS LCSD Limit **RPD** RPD Limit LCS Qual LCSD Qual Monochlorobiphenyl 57 61 10 - 125 6 40 Dichlorobiphenyl 61 63 10 - 110 3 40 65 17 - 110 40 Trichlorobiphenyl 65 0 18 - 110 65 40 Tetrachlorobiphenyl 64 1 73 72 34 - 110 2 40 Pentachlorobiphenyl 71 31 - 110 40 Hexachlorobiphenyl 69 3 72 71 Heptachlorobiphenyl 33 - 110 2 40 Octachlorobiphenyl 76 71 33 - 110 8 40 DCB Decachlorobiphenyl 77 65 26 - 115 17 40 LCS % Rec LCSD % Rec Surrogate Acceptance Limits Decachlorobiphenyl-13C12 70 84 25 - 113

#### Savannah

5102 LaRoche Avenue

## **Chain of Custody Record**

<u>TestAmerica</u>

Savannah, GA 31404 TestAmerica Laboratories, Inc. phone 912.354.7858 fax 912.352.0165 COC No: 2/22/10 Site Contact: Mike Corbett Client Contact Project Manager: Jeff Adams Date: FedEX of \_\_\_\_ COCs Lab Contact: Lidya Gulizia Carrier: **URS** Corporation Tel/Fax: (314) 743-4228 Job No. 1001 Highlands Plaza Drive West, Suite 300 **Analysis Turnaround Time** St. Louis, MO 63110 ' Calendar (C) or Work Days (W) 21562401.00001 (314) 429-0100 Phone TAT if different from Below Standard SDG No. (314) 429-0462 FAX 2 weeks Project Name: 1Q10 PCB GW Sampling 1 week Total PCBs by 680 Site: Solutia WG Krummrich Facility 2 days PO# i day Sample Sample Sample # of Date Sample Identification Time Type Matrix Cont. Sample Specific Notes: PMA-MW-25 -0210 2 2/22/10/1120 Water 2 PMA-MW-15 -0210 - MS G 2 2 Water 1120 2 G 2 PMA-MW-15 -0210 - MSD Water 1120 PMA-MW-11-0210 2 G 2 Water 1210 PMA-MW-2M-0210 2 1400 G Water 2 PMA-MW- 2M-0210 - AD -G 1400 Water 2 PMA-MW-25 -0210-EB G 2 Water 2 PMA-MW- 25-0210 -G 2 2 Water PMA-MW-5M-0210 -2 2 Water Water 2 2 PMA-MW-Preservation Used: 1= Ice, 2= HCl; 3= H2SO4; 4=HNO3; 5=NaOH; 6= Other Sample Disposal ( A fee may be assessed if samples are retained longer than 1 month) Possible Hazard Identification Archive For Flammable Skin frritant Return To Client Disposal By Lab Special Instructions/QC Requirements & Comments: Level 4 Data Package 680-55249 Received by:

Received by: Relinquished by: Relinquished by:

Relinquished by:

Theolale Company: Date/Time: <u>الحداد ( 700</u> Date/Time: Date/Time: 1700 URS Company:

#### Savannah

5102 LaRoche Avenue

# **Chain of Custody Record**

<u>TestAmerica</u>

Savannah, GA 31404

THE LEADER IN ENVIRONMENTAL TESTING

phone 912.354.7858 fax 912.352.0165																					TestAmerica Labo	ratories, Ir	nc.
Client Contact		Project Manager: Jeff Adams Si					Site Contact: Mike Corbett Date:											COC No:					
<u> </u>		Tel/Fax: (314) 743-4228					Lab Contact: Lidya Gulizia Car						Carr	arrier: Fed Ex						of CO	OCs		
1001 Highlands Plaza Drive West, Suite 300		Analysis Tu	rnaround '	Time			П			П					$\neg$		П		Т		Job No.		
St. Louis, MO 63110	Calendar	(C) or Wo	rk Days (W)	)						11											2156240	1.00001	
(314) 429-0100 Phone		AT if different i	from Below _S	tandard						11													
(314) 429-0462 FAX		2	weeks							11											SDG No.		
Project Name: 1Q10 PCB GW Sampling		1	week							11													
Site: Solutia WG Krummrich Facility		2	days			9	88			11													
PO#		1	day				s by			11		-			1								
Sample Identification	Sample Date	Sample Time	Sample Type	Matrix	# of Cont.	Filtered S.	Total PCBs														Sample Spec	cific Notes:	
PMA-MW- <b>6 D</b> -0210	2/23/10	1020	G	Water	2	$\prod$	2																
PMA-MW- <b>3M</b> -0210 —	' '_	1140	G	Water	2	Ц	2			Ш		$\perp$		Ш			Ц		$\perp$				
PMA-MW- <u><b>35</b></u> -0210 —		1230	G	Water	2	Ц	2		$\perp$	Ш		$\perp$		Ц	$\perp$				$\perp$				
PMA-MW- <u>4D</u> -0210 /		1405	G	Water	2	Ц	2		$\perp$	Ш	_	$\perp$			$\perp$	$\perp$	Ц		$\perp$	L			
PMA-MW- <u>4\$</u> -0210	V.	1530	G	Water	2	Ц	2		$\perp$	Ш		$\perp$		Ш		L	Ц		$\perp$	L			
PMA-MW0210			G	Water	2	Ц	2		$\perp$	Ш				Ц			Ц	$\perp$		$oxedsymbol{oxed}$			
PMA-MW0210			G	Water	2	Ц	2		$\perp$					Ш			Ц		$\perp$				,
PMA-MW0210			G	Water	2	Ц	2			Ш		$\perp$					Ц			L			
PMA-MW0210			G	Water	2	Ц	2	Ц	$\perp$	Ш		$\perp$					Ц	$\perp$		ot			
PMA-MW0210			G	Water	2	Ц	2			Ш		$\perp$		Ш	$\perp$	$\perp$	Ш		$\perp$	$\perp$			
						Ц			$\perp$			$\perp$		Ц					$\perp$	L			
						Ц				Ш							-			L			
Preservation Used: 1= Ice, 2= HCl; 3= H2SO4; 4=HNO3; 5=NaC	)H; 6= Othe	er					1					_											
Possible Hazard Identification  Non-Hazard Flammable Skin Irritant	Poison	$_{\scriptscriptstyle B}$ $\square$	Unknown				Sar			<b>osal (</b> To Cl				asse Dispo					re reta □ <sub>Arc</sub>		<b>d longer than 1 mor</b> For Mo	<b>nth)</b> Ionths	
Special Instructions/QC Requirements & Comments: Level 4 December 1						_	_				-					,							
Special institutions, Quantum and a community and the		5-										;				_	,	,	ŀ				
												68	۵-	55	28	33	/	٠٥,	0.	8.			
Relinquished by:	Company:	URS		Date/Tir	ne: //0/	760	Rec (	eived	by:	he	a)	al	و		Co	ompai	ny: <b>14</b>				Date/Time:	1700	၁
Relinquished by:	Company:	A		Date/Ti	ne:	770	Rec	eived	by:						Co	ompai	ny:				Date/Time:		
Relinquished by:	Company:			Date/Tin	ne:		Rec	eived	by:y	eor	ze	K	_	_	Co	ompai To	A S	<b>S</b> 1	/		Date/Time: 2 24/10	0919	7
						_			•		_					-							

# Login Sample Receipt Check List

Client: URS Corporation

Job Number: 680-55249-1 SDG Number: KPM037

OBO Namber: Na Most

List Source: TestAmerica Savannah

Login Number: 55249 Creator: Conner, Keaton

List Number: 1

List Number. 1		
Question	T / F/ NA	Comment
Radioactivity either was not measured or, if measured, is at or below background	N/A	
The cooler's custody seal, if present, is intact.	True	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	3 coolers rec'd on ice
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	2.6, 1.8 and 1.8 C
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
There are no discrepancies between the sample IDs on the containers and the COC.	True	
Samples are received within Holding Time.	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
/OA sample vials do not have headspace or bubble is <6mm (1/4") in diameter.	N/A	
f necessary, staff have been informed of any short hold time or quick TAT needs	True	
Multiphasic samples are not present.	N/A	
Samples do not require splitting or compositing.	N/A	
s the Field Sampler's name present on COC?	N/A	
Sample Preservation Verified	True	

### **Login Sample Receipt Check List**

Client: URS Corporation

Job Number: 680-55249-1 SDG Number: KPM037

List Source: TestAmerica Savannah

Login Number: 55283 Creator: Conner, Keaton

List Number: 1

Question	T / F/ NA	Comment
Radioactivity either was not measured or, if measured, is at or below background	N/A	
The cooler's custody seal, if present, is intact.	True	
The cooler or samples do not appear to have been compromised or tampered with.	True	
Samples were received on ice.	True	2 coolers rec'd on ice
Cooler Temperature is acceptable.	True	
Cooler Temperature is recorded.	True	1.0 and 0.8 C
COC is present.	True	
COC is filled out in ink and legible.	True	
COC is filled out with all pertinent information.	True	
There are no discrepancies between the sample IDs on the containers and the COC.	True	
Samples are received within Holding Time.	True	
Sample containers have legible labels.	True	
Containers are not broken or leaking.	True	
Sample collection date/times are provided.	True	
Appropriate sample containers are used.	True	
Sample bottles are completely filled.	True	
There is sufficient vol. for all requested analyses, incl. any requested MS/MSDs	True	
VOA sample vials do not have headspace or bubble is <6mm (1/4") in diameter.	N/A	
If necessary, staff have been informed of any short hold time or quick TAT needs	True	
Multiphasic samples are not present.	N/A	
Samples do not require splitting or compositing.	N/A	
Is the Field Sampler's name present on COC?	N/A	
Sample Preservation Verified	True	