

# Directed Inspection and Maintenance and Infrared Leak Detection

Lessons Learned from the  
Natural Gas STAR Program



Anadarko Petroleum Corporation and the  
Domestic Petroleum Council

Producers Technology Transfer Workshop  
College Station, Texas

May 17, 2007

[epa.gov/gasstar](http://epa.gov/gasstar)



# Directed Inspection and Maintenance and Infrared Leak Detection Outline

## 🔥 Methane Losses

- 🔥 What are the Sources of Emissions?
- 🔥 How Much Methane is Emitted?

## 🔥 Methane Recovery

- 🔥 Directed Inspection and Maintenance (DI&M)
- 🔥 DI&M by Infrared Leak Detection

## 🔥 Is Recovery Profitable?

## 🔥 Partner Experience

## 🔥 Discussion

# Methane Losses

- Estimated 395,000 producing gas wells nationally
- Fugitive emissions from gas production and gathering/boosting facilities are estimated to be 25 billion cubic feet per year (Bcf/year)
- Estimated 60 thousand cubic feet (Mcf) per well-year methane emissions
  - Worth \$420/well-year




Source: Newfield


# What is the Problem?

- 🔥 Gas leaks are invisible, unregulated, and go unnoticed
- 🔥 Natural Gas STAR Partners find that valves, connectors, compressor seals, and open-ended lines (OELs) are major methane emission sources
  - 🔥 In 2005, 2.5 Bcf of methane was emitted as fugitives by reciprocating compressor related components
  - 🔥 Production fugitive methane emissions depend on operating practices, equipment age, and maintenance

# What are the Sources of Emissions?

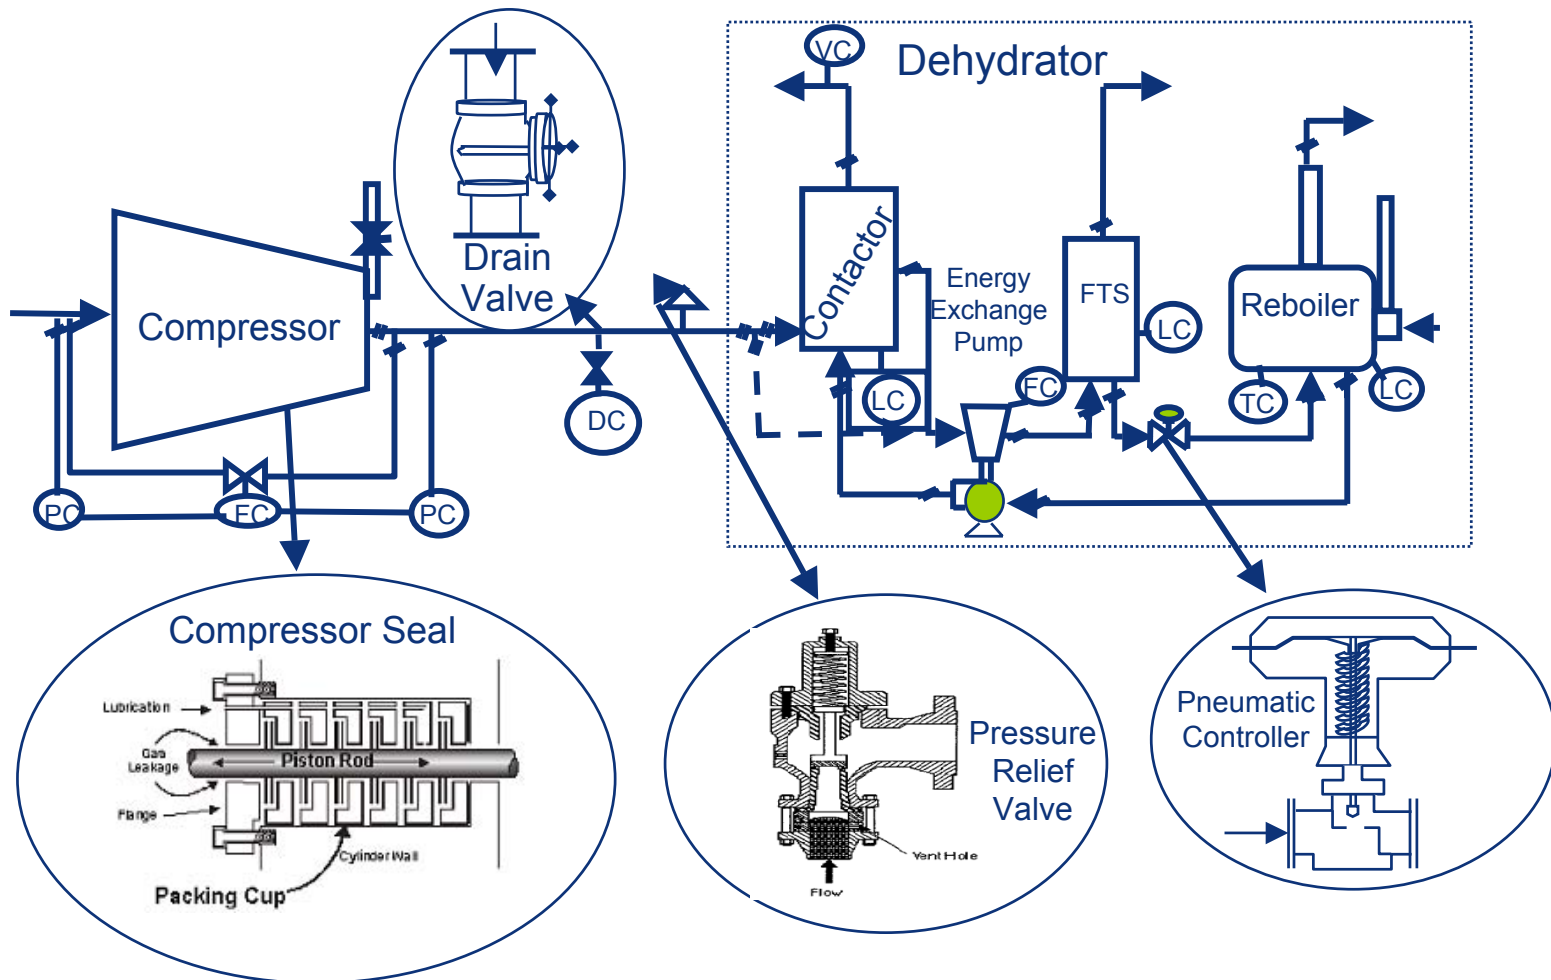


# Distribution of Losses by Source Category

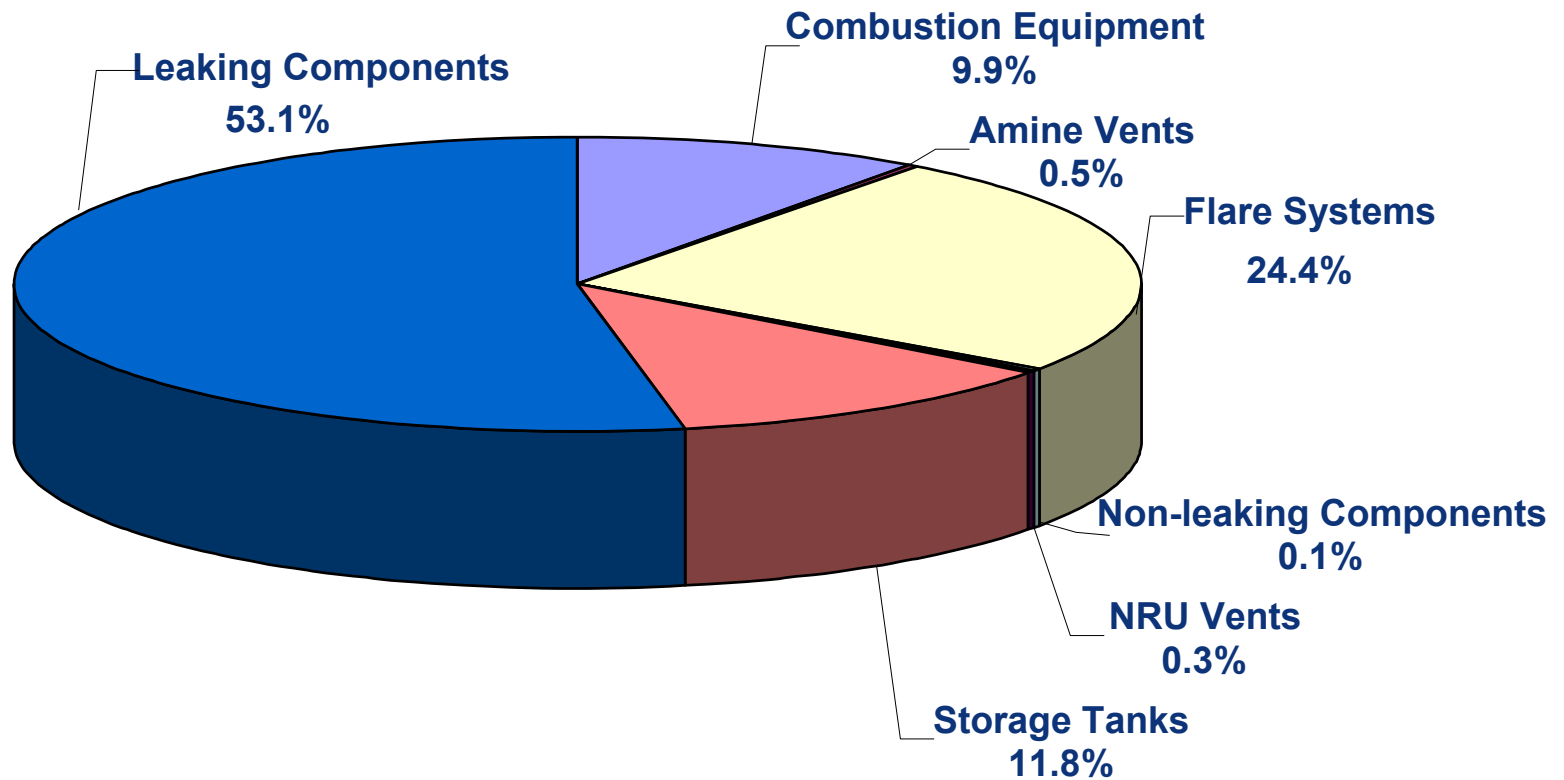

Source: Clearstone Engineering, 2002

# Distribution of Losses from Equipment Leaks by Type of Component

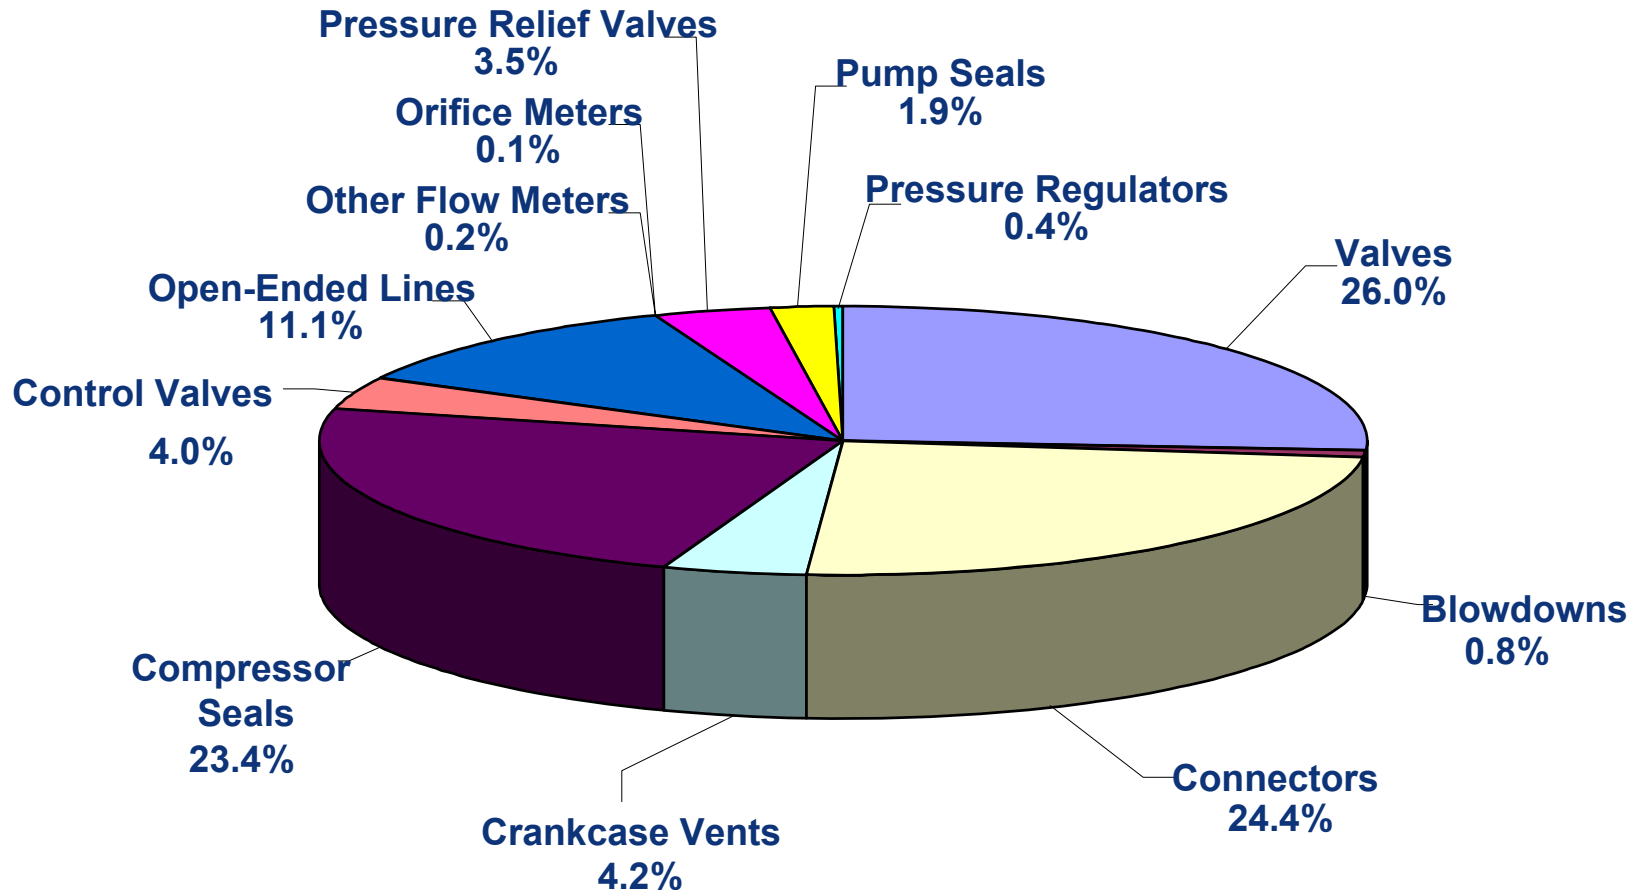

Source: Clearstone Engineering, 2002

# How Much Methane is Emitted?

## Methane Emissions from Leaking Components at Gas Processing Plants

Component Type	% of Total Methane Emissions	% Leak Sources	Estimated Average Methane Emissions per Leaking Component (Mcf/year)
Valves (Block & Control)	26.0%	7.4%	66
Connectors	24.4%	1.2%	80
Compressor Seals	23.4%	81.1%	372
Open-ended Lines	11.1%	10.0%	186
Pressure Relief Valves	3.5%	2.9%	844

Source: Clearstone Engineering, 2002, Identification and Evaluation of Opportunities to Reduce Methane Losses at Four Gas Processing Plants. Report of results from field study of four gas processing plants in Wyoming and Texas to evaluate opportunities to economically reduce methane emissions.

Mcf = Million cubic feet



# How Much Methane is Emitted?

**Summary of Natural Gas Losses from the Top Ten Leak Sources<sup>1</sup>**

Plant Number	Gas Losses From Top 10 Leak Sources (Mcf/day)	Gas Losses From All Leak Sources (Mcf/day)	Contribution By Top 10 Leak Sources (%)	Contribution By Total Leak Sources (%)
1	43.8	122.5	35.7	1.78
2	133.4	206.5	64.6	2.32
3	224.1	352.5	63.6	1.66
4	76.5	211.3	36.2	1.75
Combined	477.8	892.8	53.5	1.85

<sup>1</sup> – Excluding leakage into flare system

# Methane Recovery

- 🔥 Fugitive losses can be dramatically reduced by implementing a directed inspection and maintenance program
  - 🔥 Voluntary program to identify and fix leaks that are cost-effective to repair
  - 🔥 Survey cost will pay out in the first year
  - 🔥 Provides valuable data on leak sources with information of where to look




Source: Targa Resources

# What is Directed Inspection and Maintenance?

- Directed Inspection and Maintenance (DI&M)
  - Cost-effective practice, by definition
  - Find and fix significant leaks
  - Choice of leak detection technologies
  - Strictly tailored to company's needs
- DI&M is NOT the regulated volatile organic compound leak detection and repair (VOC LDAR) program



# How Do You Implement DI&M?

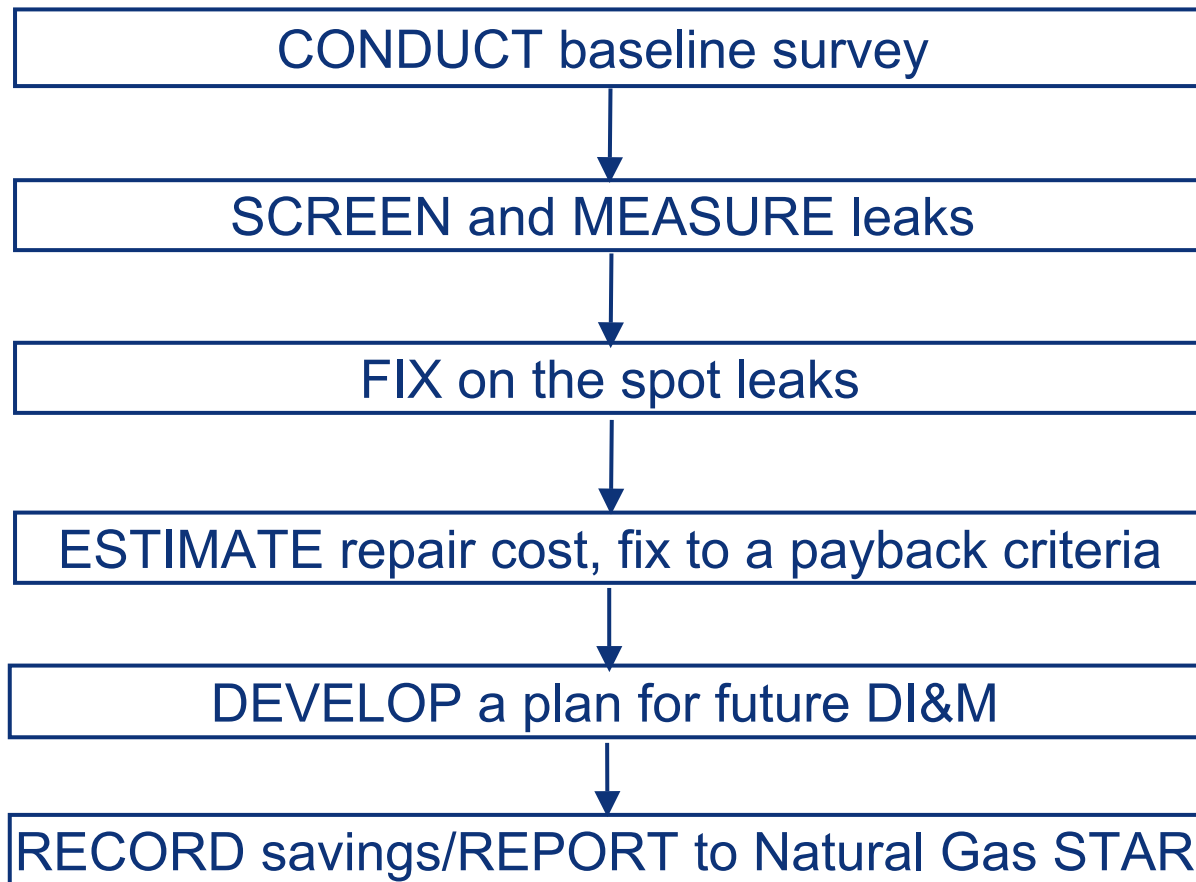

# How Do You Implement DI&M?

- 🔥 Screening - find the leaks
  - 🔥 Soap bubble screening
  - 🔥 Electronic screening (“sniffer”)
  - 🔥 Toxic vapor analyzer (TVA)
  - 🔥 Organic vapor analyzer (OVA)
  - 🔥 Ultrasound leak detection
  - 🔥 Acoustic leak detection
  - 🔥 Infrared leak detection

Toxic Vapor Analyzer



Acoustic Leak Detection





# How Do You Implement DI&M?

## 🔥 Evaluate the leaks detected - measure results

- 🔥 High volume sampler
- 🔥 Toxic vapor analyzer (correlation factors)
- 🔥 Rotameters

Leak Measurement Using a High Volume Sampler



# How Do You Implement DI&M?

Summary of Screening and Measurement Techniques		
Instrument/ Technique	Effectiveness	Approximate Capital Cost
Soap Solution	★ ★	\$
Electronic Gas Detector	★	\$\$
Acoustic Detector/ Ultrasound Detector	★ ★	\$\$\$
TVA (Flame Ionization Detector)	★	\$\$\$
Bagging	★	\$\$\$
High Volume Sampler	★ ★ ★	\$\$\$
Rotameter	★ ★	\$\$
Infrared Leak Detection	★ ★ ★	\$\$\$

Source: EPA's Lessons Learned

\* - Least effective at screening/measurement

\*\*\* - Most effective at screening/measurement

\$ - Smallest capital cost

\$\$\$ - Largest capital cost

# Estimating Comprehensive Survey Cost

- 🔥 Cost of complete screening using high volume sampler
  - 🔥 Ranges \$15,000 to \$20,000 per medium size plant
  - 🔥 Rule of Thumb: \$1 per component for an average plant
- 🔥 25 to 40% cost reduction for follow-up survey



# DI&M by Infrared Leak Detection

- Real-time detection of methane leaks
  - Quicker identification & repair of leaks
  - Screen hundreds of components an hour
  - Screen inaccessible areas simply by viewing them



# Infrared Methane Leak Detection

- 🔥 Video recording of fugitive leaks detected by various infrared devices



# Is Recovery Profitable?

<b>Repair the Cost-Effective Components</b>			
<b>Component</b>	<b>Value of Lost gas<sup>1</sup> (\$)</b>	<b>Estimated Repair cost (\$)</b>	<b>Payback (Months)</b>
Plug Valve: Valve Body	29,498	200	0.1
Union: Fuel Gas Line	28,364	100	0.1
Threaded Connection	24,374	10	0.0
Distance Piece: Rod Packing	17,850	2,000	1.4
Open-Ended Line	16,240	60	0.1
Compressor Seals	13,496	2,000	1.8
Gate Valve	11,032	60	0.1
Source: Hydrocarbon Processing, May 2002 1 – Based on \$7/Mcf gas price			

# Economic Analysis of DI&M of OELs

Economics Analysis of DI&M of Open-Ended Lines at Large and Small Gas Plants <sup>1</sup>		
	Small	Large
Inspection of Plants OELs (Man-day/year)	1	1
Inspection of Booster OELs (Man-day/year)	2	3
Inspection Prep and Record (Man-day/year)	NA	3
Repairs & Maintenance (Man-days)	1	2
Labor Cost (\$/day)	500	500
Total Labor Cost (\$/year)	2,000	4,500
Methane Savings (Mcf/year)	3,319	4,526
Gas Savings (Mcf/year) <sup>2</sup>	3,688	5,029
Gas Saving Value (\$/year)	25,816	35,203
Payback (year)	<1	<1

1 – Assumes two inspections per year

2 – Gas values based on \$7/Mcf

# DI&M - Lessons Learned

- 🔥 A successful, cost-effective DI&M program requires measurement of the leaks
- 🔥 A high volume sampler is an effective tool for quantifying leaks and identifying cost-effective repairs
- 🔥 Open-ended lines, compressor seals, blowdowns, engine-starters, and pressure relief valves represent <3% of components but >60% of methane emissions
- 🔥 The business of leak detection has changed dramatically with new technology





# Partner Experience - Targa Resources (formerly Dynegy)

- 🔥 Surveyed components in two processing plants: 23,169 components
- 🔥 Identified leaking components: 857 about 3.6%
- 🔥 Repaired components: 80 to 90% of the identified leaking components
- 🔥 Annual methane emissions reductions: 198,000 Mcf/year
- 🔥 Annual savings: \$1,386,000/year (at \$7/Mcf)



# Partner Experience - Chevron

- 🔥 Chunchula, Alabama gas processing plant
  - 🔥 Plant processes 37.5 MMcf/day
  - 🔥 Survey conducted April 4 to 9, 2005
- 🔥 Screening equipment
  - 🔥 Soaping solution, sniffers, infrared camera
- 🔥 Quantification
  - 🔥 High volume sampler
- 🔥 17,000 components screened
  - 🔥 224 components (1.3%) were found to be leaking



Source: Chevron

# Discussion

- 🔥 Industry experience applying these technologies and practices
- 🔥 Limitations on application of these technologies and practices
- 🔥 Actual costs and benefits