

# Missouri Department of Natural Resources Air Pollution Control Program 2017 Monitoring Network Plan

July 3, 2017

## **TABLE OF CONTENTS**

SUMMARY OF PROPOSED CHANGES3
HOW TO MAKE PUBLIC COMMENTS CONCERNING THIS PLAN 3
INTRODUCTION3
2017 AMBIENT AIR MONITORING NETWORK, STATE SITES7
2017 AMBIENT AIR MONITORING NETWORK, INDUSTRIAL SITES9
PROPOSED CHANGES TO THE NETWORK11
1. Lead Monitoring Network11
2. Sulfur Dioxide (SO <sub>2</sub> ) Monitoring Network14
3. National Air Toxics Trends Stations (NATTS), and Other Non-Criteria Pollutants Special Purpose Monitoring20
4. PM <sub>2.5</sub> Monitoring Network21
5. Ozone Monitoring Network26
6. PM <sub>10</sub> Monitoring Network31
7. Nitrogen Dioxide (NO <sub>2</sub> ) Monitoring Network33
8. Carbon Monoxide (CO) Monitoring Network35
9. Photochemical Assessment Monitoring Station Implementation Plan36
NETWORK DESCRIPTION/COMPONENTS42
APPENDIX 1: MISSOURI MONITORING NETWORK DESCRIPTION
APPENDIX 2: COMMENTS ON PROPOSED 2017 MONITORING NETWORK PLAN RESPONSES TO COMMENTS, AND CORRECTIONS

#### **SUMMARY OF PROPOSED CHANGES**

Missouri's Monitoring Network Plan discusses the following recent and proposed changes in detail in the sections below:

- The Pevely lead monitoring site is proposed for discontinuation at the end of calendar year 2017.
- The latitude and longitude coordinates for some of the industrial SO<sub>2</sub> sites were adjusted from the preliminary coordinates in the 2016 Monitoring Network Plan. The final coordinates were measured after installation was complete. The name of one of the industrial site operators has changed due to an acquisition.
- Operation of the near real time PM<sub>10</sub> Metals Monitor (Xact<sup>TM</sup> 620) at the Blair Street site as a part of NATTS was discontinued in January 2017.
- A Teledyne API 640x PM<sub>2.5</sub> instrument will be installed and operated at the Blair Street site to evaluate its potential future use in the network pending available funds.
- The Foley ozone monitoring site was relocated before the beginning of the 2017 ozone monitoring season to a new site, called Foley West, 1.49 kilometers east of the former site. Relocation was necessitated by a property transfer.
- The Branson ozone monitoring site is proposed for discontinuation at the end of the 2017 ozone monitoring season, October 31, 2017.
- A Photochemical Assessment Monitoring Station (PAMS) Implementation Plan is included as Section 9 of this Monitoring Network Plan. PAMS monitoring will begin at the Blair Street site in June 2019.

### HOW TO MAKE PUBLIC COMMENTS CONCERNING THIS PLAN

This 2017 Monitoring Network Plan, Revision 0, was posted for comment on June 1, 2017. No comments were received through July 3, 2017. Therefore no response to comments is needed, as noted in Appendix 2. Comments concerning this Monitoring Network Plan were accepted electronically at: cleanair@dnr.mo.gov or in writing at the following address:

Missouri Department of Natural Resources Air Pollution Control Program Air Quality Analysis Section/Air Monitoring Unit P.O. Box 176 Jefferson City, MO 65102

#### INTRODUCTION

The Missouri Department of Natural Resources operates an extensive network of ambient air monitors to comply with the Clean Air Act and its amendments. The Ambient Air Quality Monitoring Network for the State of Missouri consists of State and Local Air Monitoring Stations (SLAMS), Special Purpose Monitoring (SPM) Stations, and National Core (NCore) monitoring consistent with requirements in federal regulation 40 CFR 58.

40 CFR 58.10 requires that states submit to EPA an annual monitoring network plan including any proposed network changes. A network assessment is required every five years, and the most recent one was completed in 2015. 40 CFR 58.10 also requires that the plan include a statement of whether the operation of each monitor meets the requirements of appendices A, B, C, D, and E of 40 CFR 58 where applicable. All of the monitors in the Missouri air monitoring network, including those operated by the State and those operated by industries under State review meet the applicable requirements of 40 CFR 58. With regard to state and local air monitoring station (SLAMS) changes, approval by the Environmental Protection Agency Regional Administrator is required.

The plan must contain the following information for each monitoring station in the network; most of this information is listed for each site in Appendix 1; number 5 is addressed in the body of this document:

- 1. The Air Quality System site identification number for existing stations.
- 2. The location, including the street address and geographical coordinates, for each monitoring station.
- 3. The sampling and analysis method used for each measured parameter.
- 4. The operating schedule for each monitor.
- 5. Any proposal to remove or move a monitoring station within a period of eighteen months following the plan submittal.
- 6. The monitoring objective and spatial scale of representativeness for each monitor.
- 7. The identification of any sites that are or are not suitable for comparison against the annual PM<sub>2.5</sub> National Ambient Air Quality Standard (NAAQS).
- 8. The metropolitan statistical area, core-based statistical area, combined statistical area or other area represented by the monitor.

### Network Design

Federal regulation (40 CFR Part 58) establishes the design criteria for the ambient air monitoring network. The network is designed to meet three general objectives:

- Provide air pollution data to the public in a timely manner.
- Support compliance with ambient air quality standards and emissions strategy development.
- Support air pollution research studies.

Specific objectives for the monitoring sites are to determine the highest pollution concentrations in an area, to measure typical concentrations in areas of high population density, to determine the impact of significant sources or source categories, to determine general background levels and to determine the extent of regional pollutant transport among populated areas. Minimum site requirements are provided for ozone, sulfur dioxide, CO, NO<sub>2</sub>, PM<sub>10</sub> and PM<sub>2.5</sub> based on Core Based Statistical Area (CBSA) population.

Appendix E to Part 58 establishes the specific requirements for monitor/probe siting to ensure the ambient data represents the stated objectives and spatial scale. The requirements are

pollutant/scale specific and involve horizontal/vertical placement. Periodically, department staff visit and evaluate each monitoring site to ensure that each site continues to meet the requirements of 40 CFR 58 Appendix E. Any issues related to probe siting, such as growth of trees or other vegetation, are addressed by taking appropriate action following the site visits. Documentation of these reviews is maintained on file. Additional details concerning the sites may be found in Appendix 1.

There is only one PM<sub>2.5</sub> monitor in Missouri that is not applicable for comparison to the annual NAAQS. The Branch Street site is a middle-scale site focused on a group of sources in the industrial riverfront area and is not representative of neighborhood or larger spatial scale for PM<sub>2.5</sub> monitoring. The PM<sub>2.5</sub> monitors deployed to collocate with the near-roadway NO<sub>2</sub> monitors are micro-scale monitors, but EPA has indicated in 40 CFR 58 Appendix D, 4.7.1(c)(2) that "...In many situations, monitoring sites that are representative of microscale or middle-scale impacts are not unique and are representative of many similar situations. This can occur along traffic corridors or other locations in a residential district. In this case, one location is representative of a number of small scale sites and is appropriate for evaluation of long-term or chronic effects." these monitors may be considered by EPA to be representative of larger areas near roadways and comparable to the annual PM<sub>2.5</sub> NAAQS consistent with 40 CFR 58.30.

### <u>Unanticipated Network Modifications</u>

Changes to the monitoring network may occur outside the annual monitoring network planning process due to unforeseen circumstances resulting from severe weather, natural events, changes in property ownership, or other situations that occur after the monitoring plan has been posted for public inspection and approved by the EPA Regional Administrator. Changes to the monitoring network may also be necessary because of financial constraints resulting from changes in federal funding or changes in funding available from air emission fees from industrial facilities. Any changes to the network that result due to conditions outside the state's logistical control and not included in the current monitoring network plan will be communicated in writing to EPA Region VII staff and identified in the subsequent annual monitoring network plan.

#### Special Purpose Monitors (SPM)

Consistent with 40 CFR 58.20 (a) "An SPM is defined as any monitor included in an agency's monitoring network that the agency has designated as a special purpose monitor in its annual monitoring network plan and in AQS, and which the agency does not count when showing compliance with the minimum requirements of this subpart for the number and siting of monitors of various types."

Special purpose monitors may be established for many different purposes, including but not limited to, NAAQS compliance evaluation, air quality research and characterization, air quality investigation, and monitoring method evaluation.

The department includes SPMs in the annual monitoring network plan required by 40 CFR 58.10. The department installs and approves the installation of these monitors consistent with 40 CFR 58.20 (f). In addition, the department removes, or allows removal of these monitors,

following federal guidelines. There is more description of each SPM later in the document. The Missouri Monitoring Network Description, Appendix 1, identifies which monitors are SPM and which are SLAMS.

### **Industrial Monitors**

Ambient air monitoring sites classified as Industrial in this plan indicate that the ambient air monitoring at that site is being conducted by the industrial source or its contractor under an approved industrial monitoring Quality Assurance Project Plan (QAPP) and departmental Quality Management Plan (QMP). Department staff conducts quality assurance audits of these monitoring sites consistent with the approved QAPP.


For decades Missouri has overseen ambient air monitoring sites operated by industrial sources for NAAQS compliance. The department has incorporated these Industrial sites in the annual Monitoring Network Plans. Currently, industrial monitoring for some lead and SO<sub>2</sub> sites is incorporated in the ambient air monitoring network.

Some industrial monitoring sites in the lead network are classified in AQS as non-regulatory due to the sites having transitioned to non-ambient status. However, the department has required continued monitoring at these locations in agreements with the industrial source for trends analysis or other purposes.

## 2017 AMBIENT AIR MONITORING NETWORK, STATE SITES

The 2017 statewide monitoring network is shown in the following map and table.

# 2017 Missouri State Monitoring Network

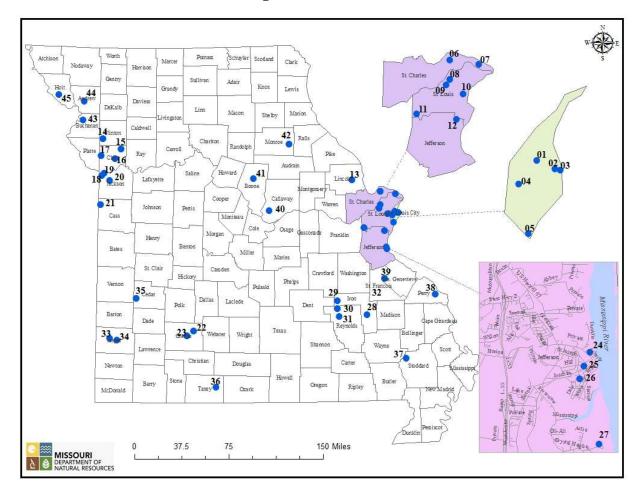

St. Lo	uis Area		Spring	field Area		Acronym	
Site#	Site Name	Parameter Monitored	Site#	Site Name	Parameter Monitored	PM <sub>10</sub>	Particulate Matter (Diamete
01	Margaretta	PM <sub>10</sub> , SO <sub>2</sub> , NO <sub>2</sub> , NO <sub>x</sub> , NO,	22	Fellows	O <sub>3</sub> , IT	16110 F.C.	size ≤10 micrometer
		IT		Lake		PM10-LC	PM10 Local Condition
02	Blair Street	PM <sub>10</sub> , PM <sub>10-LC</sub> , PM <sub>2.5</sub> ,	23	Hillcrest	O <sub>3</sub> , PM <sub>10</sub> , PM <sub>10-LC</sub> , PM <sub>2.5</sub> ,	1 11120 20	1 mile Escal Schlattion
UZ.		PM <sub>2.5</sub> (Spec), PMCoarse,	355.E4	High School	PMCoarse, OT, IT, BP, RH	PM2.5	Particulate Matter (Diamete
		O <sub>3</sub> , SO <sub>2</sub> , NO <sub>2</sub> , NO <sub>y</sub> , NO <sub>x</sub> ,		riigii ociiooi	1 111000130, 01,11, 21,111	11112.5	size ≤2.5 micrometer)
		NO, CO, Carbonyls,				PMCoarse	Particulate Matter (Diamete
		PAHs, VOCs, Air Toxics,	Hercu	laneum Area		FIVICOAISE	size between 2.5 and 10
		Carbons, PM <sub>10</sub> Metals,	Site#	Site Name	Parameter Monitored		micrometer)
		WS, WD, OT, IT, SR, BP,	24	Sherman	Pb	Carrie	- A
			25	Dunklin	Pb	Spec	Speciation
02	Decemb	RH DM DM		High School		SO2	Sulfur Dioxide
03	Branch	PM <sub>10</sub> , PM <sub>10-LC</sub> , PM <sub>2.5</sub> ,	26	Mott Street	Pb	NO2	Nitrogen Dioxide
	Street	PMCoarse, WS, WD, OT,	27	Ursuline	Pb	NO	Nitric Oxide
		IT, BP, RH		North		NOy	Reactive Oxides of Nitrogen
04	Forest Park	PM <sub>10-LC</sub> , PM <sub>2.5</sub> ,				NOx	Oxides of Nitrogen
		PMCoarse, NO <sub>2</sub> , NO <sub>x</sub> ,	Mary	ead Belt Area		CO	Carbon Monoxide
		NO, CO, BC, WS, WD,	100000000000000000000000000000000000000		- 12 C	Pb	Lead (High Volume)
		OT, IT, SR, BP, RH, Prec	Site#	Site Name	Parameter Monitored	BC	Black Carbon
05	South	PM10, PM10-LC, PM2.5,	28	Glover	Pb	Prec	Precipitation
	Broadway	PMCoarse, IT, BP, RH	29	Buick NE	Pb, SO2, WS, WD, IT	WS	Resultant Wind Speed
06	Orchard	O3, IT	30	Oates	Pb	WD	Resultant Wind Direction
	Farm		31	Fletcher	Pb	OT	Outside Temperature
07	West Alton	O3, WS, WD, OT, IT, SR	32	St. Joe	Pb	IT	Inside Temperature
08	Rider Trail	NO2, Nox, NO, WS, WD,		State Park		SR	Solar Radiation
	1-70	OT, IT, SR, Prec,				BP	Barometer Pressure
		SO2 (RES)	Outst	ate Area		RH	Relative Humidity
09	Maryland	O3, IT	Site#	Site Name	Parameter Monitored	IMPROVE	Interagency Monitoring of
05	Heights	03,11	33	Alba	O3. IT	MINOVE	Protected Visual Environme
10	Ladue	PM2.5, WS, WD, OT, IT,	34	Carthage	PM10, WS, WD, IT		(Regional Haze)
10	Ladue	BP, RH	35	El Dorado	PM10-LC, PM2.5,	RES	Research
11	Pacific	O3, WS, WD, OT, IT	33	Springs	PMCoarse, O3, WS, WD,	NL3	Research
12	Arnold West			Springs			
12	Arnoid West	PM10, PM10-LC, PM2.5,	36	macrates	OT, IT, BP, RH		
		PM2.5(Spec), IT	30	Hercules	PM2.5 (Spec)-IMPROVE		
		PMCoarse, O3, WS, WD	27	Glades	D. 10 F 10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
222	L V 100	OT, IT, BP, RH	37	Mingo	PM2.5 (Spec)-IMPROVE		
13	Foley West*	O3, WS, WD, IT	38	Farrar	O3, IT		
			39	Bonne	03		
Kansa	is City Area			Terre			
Site#	Site Name	Parameter Monitored	40	New	O3, IT		
14	Trimble	O3, IT		Bloomfield			
15	Watkins Mill	O3, IT	41	Finger	O3, IT		
16	Liberty	PM10-LC PM2.5,		Lakes			
771	13	PMCoarse, O3, WS, WD,	42	Mark	PM10, SO2, NO2, Nox,		
		OT, IT, SR, BP, RH		Twain State	NO, O3, WS, WD, IT		
17	Rocky Creek	O3. IT		Park	SAND FOR THE CONTRACT OF THE POST OF THE CONTRACT OF THE CONTR		
18	Troost	PM10, PM2.5, SO2,	43	St. Joseph	PM10, PM10-LC, PM2.5,		
10	110051	NO2, Nox, OT, IT	S18	Pump	PMCoarse WS, WD, OT,		
19	Front Street	PM10		Station	IT, RH		
			44	Savannah	03, WS, WD, IT		
20	Blue Ridge	PM10-LC, PM2.5,	45		Pb		
	I-70	PMCoarse, NO2,	45	Forest City,	FD		
		Nox, NO, CO, BC, WS,		Exide			
		WD, OT, IT, SR, BP, RH,		to yets ill that			
		Prec	*Reloc	ated from form	er Foley site		
21	Richards	PM10-LC, PM2.5,					
	Gebaur-	PMCoarse, O3,					


#### Notes:

- a. The acronym  $PM_{10\text{-LC}}$  is also commonly referred to as  $PM_{10c}$  when collected with a low volume sampler consistent with appendix O to Part 50.  $PM_{10\text{-LC}}$  means particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers where the concentration is reported at local conditions of ambient temperature and barometric pressure.  $PM_{10\text{-LC}}$  is used in this document to describe any continuous or filter based  $PM_{10}$  low volume measurement concentration that is reported at local conditions of ambient temperature and barometric pressure.
- b. PM<sub>10</sub> means particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers where the concentration is adjusted to EPA reference conditions of ambient temperature and barometric pressure (25 °C and 760 millimeters of mercury or STP).
- c. PMcoarse is also frequently referred to as  $PM_{10-2.5}$ .

### 2017 AMBIENT AIR MONITORING NETWORK, INDUSTRIAL SITES

Monitoring sites operated by industries are shown in the following map and listed in the following table.

2017 Missouri Industry Monitoring Networks

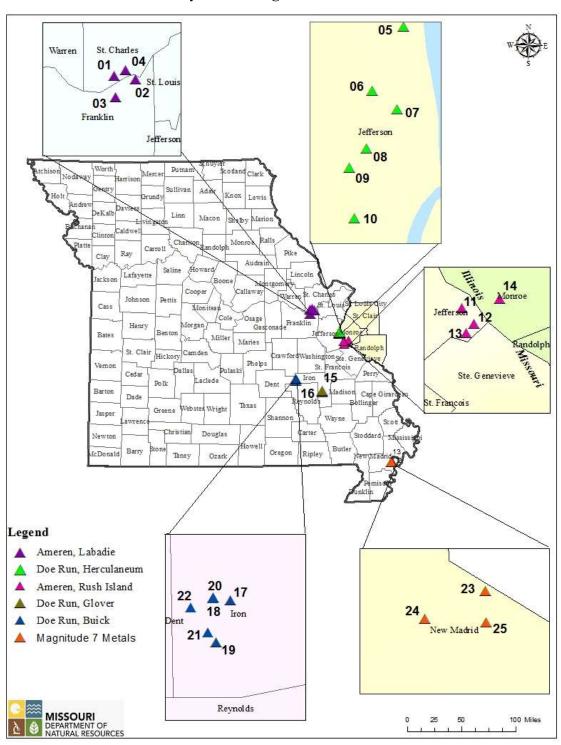

Leger	nd (Industry Monit	oring Network)			
Amer	en, Labadie Energy (	Center	Acron	nym	
Site#	Site Name	Parameter Monitored	SO2	Sulfur Dioxide	
01	Northwest	SO2, ( WS, VWS, WD, OT, $\sigma_{\phi}$ , $\sigma_{e}$ , RH)^	Pb	Lead (High Volume)	
02	Valley	SO2, (WS, VWS, WD, OT, SR, BP, RH,	$\sigma_{e}$	Sigma Theta (Standard Deviation of Horizontal Wind	
		Prec, $\sigma_{\phi}$ , $\sigma_{e}$ )^		Direction	
03	Southwest	SO2	WS	Resultant Wind Speed	
04	North	SO2	WD	Resultant Wind Direction Outside Temperature	
Dog P	un, Herculaneum		SR	Solar Radiation	
Site#	Site Name	Parameter Monitored	BP	Barometer Pressure	
05	Sherman	Pb	RH	Relative Humidity	
06	Dunklin	Pb	$\sigma_{\phi}$	Sigma Theta (Standard Deviation of Vertical Wind Spee	
07	Broadway	(WS, WD, OT, SR, BP, RH, Prec, σ <sub>e</sub> ) <sup>Λ<sup>a</sup></sup>	Prec	Precipitation	
08	Mott Street	Pb	VWS	Vertical Wind Speed	
09	North Cross	Pb			
10	Church Street*	Pb			
Amer	en, Rush Island Ener	av Center			
Site#	Site Name	Parameter Monitored			
11	Weaver-AA	SO2			
12	Johnson Tall Tower	(WS, VWS, WD, OT, $\sigma_{\phi}$ , $\sigma_{e}$ )^			
13	Natchez	SO2			
14	Fults, IL	SO2, (WS, VWS, WD, OT, SR, BP, RH,	а	Metrological Data is not submitted to the EPA Air Qual	
the file	r dito, ie	Prec, $\sigma_0$ , $\sigma_e$ ) <sup><math>\Lambda</math></sup>		(AQS) Database	
			٨	Regulatory Dispersion Modeling Grade Parameters	
Doe R	un, Glover		*	Non-Ambient Monitor	
Site#	Site Name	Parameter Monitored			
15	Post Office #2*	Pb			
16	Big Creek*	Pb			
	(1) and (1)				
	un, Buick	D			
Site#	Site Name	Parameter Monitored			
17	Buick NE	Pb			
18	Buick North#5*	Pb			
19	Buick South#1*	Pb, (WS, WD, OT, SR, BP, RH, Prec, $\sigma_e$ )			
20	Hwy 32 Northeast	SO2			
21	West Entrance	SO2			
22	County Road 75	SO2			
Maan	itude 7 Metals				
Site#	Site Name	Parameter Monitored			
23	Site #1	SO2			
24	Site #2	SO2			
Sec. T	OILU IIZ				

#### PROPOSED CHANGES TO THE NETWORK

### 1. Lead Monitoring Network

Changes to airborne lead monitoring requirements were published in the Federal Register: December 27, 2010 (Volume 75, Number 247). The new rules require a plan for monitoring lead sources emitting 0.50 tons per year or more, revised from the previous requirement for monitoring sources emitting one ton per year or more. Airports are specifically exempted from these requirements except for a special study being conducted at specific airports, none of which are in Missouri.

Department staff reviewed the 2014 reported lead emissions and identified only one source not previously identified, NorthStar Battery plant number 1 in Springfield, as emitting greater than 0.50 ton of lead per year and for which ambient air monitoring is not currently being conducted or where EPA has not already granted a modeling waiver consistent with 40 CFR 58 Appendix D, 4.5 (a) (ii). However, the most recent revised construction permit (no. 122016-001, issued in December 2016) for that facility limits its lead emissions to not more than 0.25 ton per year. Therefore, monitoring adjacent to this facility is not required. A review of quality-assured 2015 emissions data and preliminary 2016 emissions data did not identify any additional sources emitting greater than 0.50 ton per year.

### 1.1 Forest City, Exide Monitoring Site

The 2013 Monitoring Network Plan identified the resumption of lead TSP monitoring at a location near the Exide Secondary Lead Smelter in Forest City, MO. The monitoring method initially deployed, as described in the 2012 Monitoring Network Plan, utilized the low volume PM<sub>10</sub> sampler and Pb-PM<sub>10</sub> analysis performed by X-ray Fluorescence (XRF) following specifications and procedures in 40 CFR part 50 Appendix Q. Since the deployment of the Pb-PM<sub>10</sub> FRM, as a Special Purpose Monitor, in March of 2012, three month rolling averages of airborne lead were monitored at concentrations greater than 0.15 micrograms per cubic meter (μg/m³). As a result a Pb-TSP sampler was deployed in August 2012 for subsequent attainment determination. The department discontinued the Pb-PM<sub>10</sub> FRM in December 2013 but the Pb-TSP sampler continues to monitor lead at the site. As a result of changes in operations at that facility, including addition of pollution control equipment, an exceedance of the lead NAAQS has not been monitored at that site since October-December 2013. Discontinuing the Forest City monitor may be proposed in future monitoring network plans if this trend continues.

#### 1.2 Doe Run Operated Sites

### 1.2.1 Doe Run Lead Sites

Doe Run operates lead monitoring sites in the vicinity of their industrial facilities in Herculaneum, Glover, and Boss. Operation of some of these sites is required by Consent Judgments or Agreements with the department, and operation of other sites is voluntary.

### 1.2.2 Doe Run Meteorological Sites

Doe Run Herculaneum also operates one ten meter tower meteorological monitoring site as per language set forth under the 2011 Consent Judgment. Doe Run Herculaneum discontinued the 40 meter tower at Broad Street as per the Consent Judgment.

### 1.3 Department's Lead Monitoring Network in Herculaneum

Monitoring at the Pevely North site was discontinued in January 2017 as proposed in the 2016 Monitoring Network Plan and approved by US EPA.

With the cessation of primary lead smelting at the Doe Run facility in Herculaneum, the department also proposes discontinuing monitoring at the Pevely site at the end of calendar year (CY) 2017. That site has not shown an exceedance of the lead NAAQS since September-November 2012, and has averaged  $0.013~\mu g/m^3$  since smelting operations at Herculaneum were discontinued at the end of 2013. The Pevely site meets the conditions in 40 CFR Part 58.14 (c) (1) for discontinuation; if the site continues to show attainment, it will have shown attainment for five years by the end of November 2017, it has a probability of less than 10 percent of exceeding 80 percent of the NAAQS based on recent monitored concentrations, it is not required by an attainment or maintenance plan, and there are other monitors in the Herculaneum area with higher design values that will remain in operation.

The department continues to carefully evaluate the lead data monitored at its sites in Herculaneum and may consider additional modification in the future, particularly sampling schedules at the Dunklin, Sherman, and Mott sites.


#### 1.4 St. Joe State Park Monitoring Site

The department has reduced the frequency of sampling at the Special Purpose lead monitoring site at St. Joe State Park from every third day to every sixth day. The St. Joe State Park site was intended to monitor airborne lead concentrations during remediation activities involving old lead mining waste in the Federal Mine Tailings. The bulk of the remediation activity was completed as of late July/early August of 2014. The three-month rolling average has not exceeded the lead standard, 0.15  $\mu$ g/m³, since the site began monitoring lead on July 1, 2010. The highest three-month rolling average airborne lead concentration at that site was 0.14  $\mu$ g/m³ in July-September 2011. This elevated lead concentration was attributable to remediation activities near the monitor. Since that time the three-month average lead concentration at that site has not exceeded 0.13  $\mu$ g/m³.

### 1.5 Bills Creek Lead Monitor

Monitoring at the Bills Creek site was discontinued at the end of January 2017 as proposed in the 2016 Monitoring Network Plan and approved by US EPA.

### 2017 Missouri Lead Monitoring Network\*, NAAQS=0.15μg/m³ (3 month)

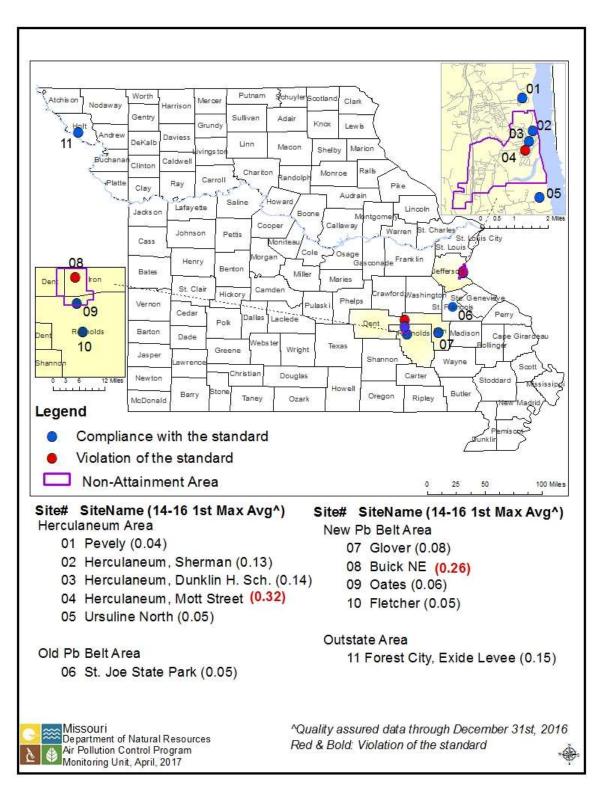

<sup>\*</sup>The Pevely site is proposed for discontinuation at the end of CY 2017. No other changes are proposed in this plan.

### 2. Sulfur Dioxide (SO<sub>2</sub>) Monitoring Network

On June 2, 2010, the US EPA revised the primary SO<sub>2</sub> standard by establishing a 1-hour standard at the level of 75 parts per billion (ppb). The EPA revoked the two previous primary standards of 140 ppb evaluated over 24-hrs and 30 ppb evaluated over an entire year. The 2011 Monitoring Network Plan<sup>1</sup> identified the minimum network monitoring required by the Population Weighted Emissions Index (PWEI). This analysis has been updated using 2010 census data and 2011 NEI emissions. The required numbers of monitoring sites based on the PWEI (2 sites each in the St. Louis and Kansas City CBSAs) did not change. The department's 2017 SO<sub>2</sub> monitoring network is shown in the map below.

In May 2014 US EPA published proposed data requirements regulations related to SO<sub>2</sub> air quality monitoring and air quality dispersion modeling near emission sources. These requirements were finalized in the SO<sub>2</sub> Data Requirements Rule (DRR) published in the Federal Register on August 21, 2015. This final rule requires that air agencies must characterize air quality, either by monitoring or modeling, around sources that emit 2,000 tons per year (tpy) or more of SO<sub>2</sub>. The requirement for air quality characterization near a source may be avoided by adopting enforceable emission limits that ensure that the source will not emit more than 2,000 tpy of SO<sub>2</sub>. On January 15, 2016 the department submitted a final list identifying the sources in the state around which SO<sub>2</sub> air quality will be characterized. That submittal may be found at https://www3.epa.gov/airquality/sulfurdioxide/drr/mo.pdf. The Ameren Labadie Energy Center and the Noranda Aluminum (now known as Magnitude 7 Metals) facility (both discussed below) were included on that list. The Doe Run Buick Resource Recycling Facility (also discussed below) reported emissions less than 2,000 tpy but was also included on the list because emissions from that facility were uncertain and under review at the time of the January 2016 submittal. The Ameren Rush Island Energy Center was not included in the list, because it is within a previously-designated nonattainment area (designated as nonattainment due to emissions from another facility). Monitoring in the area around that Rush Island is being conducted on an accelerated schedule (compared to the DRR timeline) by agreement between the department and Ameren associated with the plan for the Jefferson County nonattainment area submitted to EPA in May 2015.


For each facility listed in the January 2016 submittal, the state was required to identify by July 1, 2016, the approach (ambient monitoring or air quality modeling) that would be used to characterize air quality or identify sources whose emissions will be limited to less than 2,000 tpy by an enforceable agreement. For source areas that were to be evaluated through ambient monitoring, the air agency was required to submit information on monitoring sites to the EPA by July 1, 2016, as part of its annual monitoring network plan. This SO<sub>2</sub> monitoring to meet the DRR was required to begin by January 1, 2017. Monitoring near these sources in Missouri is discussed in the following sections. This monitoring is being conducted by the industries operating the sources, but the monitoring must be conducted in accordance with the SLAMS requirements in 40 CFR Part 58, and the department reviewed and approved the siting of the monitors based on federal regulations and oversaw the operation of the monitors. To meet the requirements of the DRR, these monitors will need a minimum of three years of monitoring data.

-

<sup>&</sup>lt;sup>1</sup> http://dnr.mo.gov/env/apcp/docs/2011monitoringnetwork.pdf

The sources cannot discontinue monitoring thereafter without EPA approval based on the requirements of 40 CFR 51.1203(c)(3) or 40 CFR 58.14.

### 2017 Missouri Sulfur Dioxide (SO<sub>2</sub>) Monitoring Network\*, NAAQS=75 ppb (1 hour)

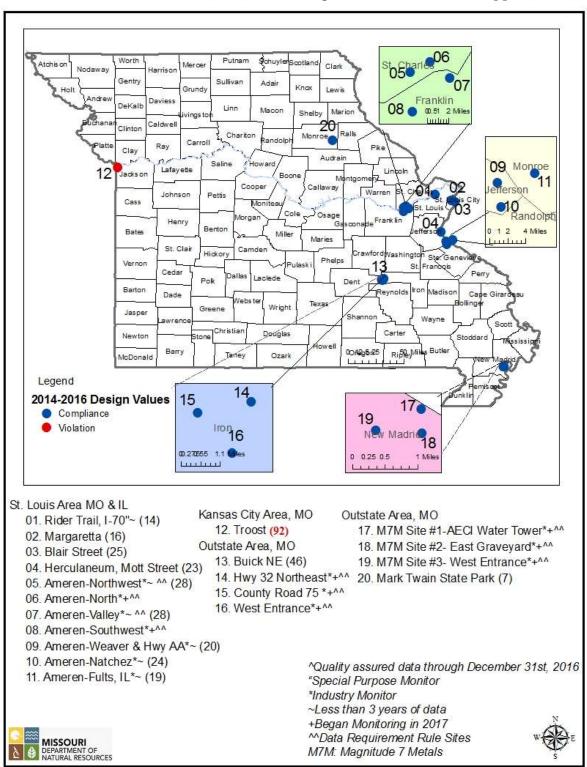

<sup>\*</sup>No changes to the SO<sub>2</sub> network are proposed in this plan.

# 2.1 Industrial SO<sub>2</sub> & Meteorological Monitoring near the Labadie and Rush Island Energy Centers

As indicated in the Missouri 2015 Monitoring Network Plan, two SO<sub>2</sub> ambient Air Monitoring networks were deployed around the Labadie and Rush Island power pants. At the time that plan was posted for public inspection, EPA had not promulgated the SO<sub>2</sub> DRR or revisions to the monitoring requirements in 40 CFR 58. The SO<sub>2</sub> DRR and revisions to 40 CFR 58 were published in the Federal Register on August 21, 2015 and March 28, 2016, respectively.

The revised quality assurance requirements of 40 CFR 58 Appendix A, indicate in section 1.1 (a) that "This appendix specifies the minimum quality system requirements applicable to SLAMS and other monitor types whose data are intended to be used to determine compliance with the NAAQS (e.g., SPMs, tribal, CASTNET, NCore, industrial, etc.),..." This revision supports states using monitors with any of these classifications to satisfy the DRR monitoring requirements in 40 CFR 51.1203 (c) so long as these monitors are operated in a manner equivalent to SLAMS. Both SLAMS and industrial NAAQS compliance monitoring networks in Missouri are operated under a department approved QAPP consistent with the departmental Quality Management Plan (QMP) that has been approved by EPA Region VII.

EPA Region VII indicated in a January 25, 2016 letter approving our 2015 Monitoring Network Plan that they did not evaluate the Labadie and Rush Island SO<sub>2</sub> monitoring networks described in detail in that plan due to our classification of those monitors as Special Purpose Monitors (SPM).

After reviewing the revisions to 40 CFR 58 against monitor classifications as they apply to NAAQS compliance monitoring, we classified the Labadie and Rush Island SO<sub>2</sub> monitors as industrial SO<sub>2</sub> monitors. This is consistent with how we handle industrial monitors used for NAAQS compliance in both our SO<sub>2</sub> and lead ambient air monitoring networks.

The following sections describe the current status of the Labadie and Rush Island  $SO_2$  monitoring networks based on the 2016 Monitoring Network Plan.

### 2.1.1 Labadie Energy Center

On March 20, 2015 EPA updated implementation guidance as a result of the March 2, 2015 U.S. District Court for the Northern District of California accepting an enforceable order and agreement between the EPA and Sierra Club and Natural Resources Defense Council. This agreement is intended to resolve litigation related to the deadline for completing the 1-hour SO<sub>2</sub> NAAQS designations process.

Since proposing the first two SO<sub>2</sub> monitors near the Labadie Energy Center in our 2015 Monitoring Network Plan, EPA promulgated the SO<sub>2</sub> DRR. Consistent with the DRR definitions section, 40 CFR 51.1200, the area designation status with respect to the one-hour SO<sub>2</sub> NAAQS determines if this area is subject to the DRR. The DRR applies if the area around the Labadie Energy Center is not designated as a nonattainment area. On June 30, 2016, EPA designated that area as unclassifiable (Federal Register, volume 81, number 133, July 12, 2016).

Therefore, the DRR applies to this area and to the monitoring network as proposed in the 2016 Monitoring Network Plan and approved by EPA.

The department will continue to work with Ameren to collect quality assured SO<sub>2</sub> ambient air quality data and meteorological data near the Labadie Energy Center to provide quantifiable and useful technical information to meet the DRR requirements and supplement the ongoing 1-hour SO<sub>2</sub> NAAQS implementation process.

Two industrial SO<sub>2</sub> ambient air monitoring sites and a meteorological monitoring station began operation in April 2015 in the area around the Ameren Labadie Energy Center, located at 226 Labadie Power Plant Road in Franklin County, Missouri. Two additional industrial SO<sub>2</sub> monitoring sites southwest and north of the Labadie Energy Center were installed and began operation on January 1, 2017. The location of those sites was determined on the basis of dispersion modeling as discussed in the 2017 Monitoring Network Plan. Also, meteorological monitoring using a 10 meter tower was added at the Northwest site, and the SODAR instrument was relocated from the Valley site to the Northwest site in February 2017. These monitoring sites (see the following table) are operated by Ameren under a department-approved Quality Assurance Project Plan (QAPP). The rationale for site selection based on modeling results is discussed extensively in the 2015 and 2016 Monitoring Network Plans.

### Summary of Labadie area Industrial Monitoring Stations:

Monitoring Objective: Source Oriented

Spatial Scale of representativeness: Middle Scale (100m<sup>2</sup> to 0.5 km<sup>2</sup>)

Labadie Northwest -SO<sub>2</sub>, 10 Meter Meteorological Station and Sound Detection and Ranging (SODAR). (Lat: 38.5818 Long: -90.865528)

Labadie Valley -SO<sub>2</sub>, 10 Meter Meteorological Station. (Lat: 38.572522 Long: -90.796911)

Labadie Southwest -SO<sub>2</sub>, (Lat: 38.52825 Long: -90.86301;

Labadie North –SO<sub>2</sub>, (Lat: 38.59557 Long: -90.82864;

### 2.1.2 Rush Island Energy Center

On March 23, 2015 the department and Ameren entered into a Consent Agreement (Appendix 3 of the 2015 Monitoring Network Plan) which included Ameren installing and operating an SO<sub>2</sub> monitoring network around the Rush Island Energy Center under department oversight. The siting of these monitors was consistent with the technical process described in the SO<sub>2</sub> DRR.

Although the primary objective of the Rush Island ambient air monitoring project is to satisfy the terms of the aforementioned Consent Agreement, it is possible that the quality assured monitoring data may be used for other future purposes depending on the final outcome of EPA's national implementation strategy for the 2010 1-hour SO2 NAAQS and the Jefferson County Nonattainment area implementation process.

The department will continued to work with Ameren to collect quality assured SO<sub>2</sub> ambient air quality data and meteorological data near the Rush Island power station to provide quantifiable and useful information to supplement the ongoing 1-hour SO2 NAAQS implementation process.

The Rush Island monitoring network design was based on evaluation of dispersion modeling, as described in the 2015 and 2016 Monitoring Network Plans. This network began operation in December 2015.

### Summary of Rush Island area Industrial Monitoring Stations:

Monitoring Objective: Source Oriented

Spatial Scale of representativeness: Middle Scale (100m<sup>2</sup> to 0.5 km<sup>2</sup>)

Weaver-AA -SO<sub>2</sub>. (Lat: 38.144529 Long: -90.304726)

Natchez -SO<sub>2</sub>, (Lat: 38.10525 Long: -90.29842)

Fults, IL, -SO<sub>2</sub>, 10 Meter Meteorological Station (Lat: 38.15908 Long: -90.22728)

Johnson Tall Tower - Meteorological Station Only, anemometers at 62.5m and 132.5m levels

(Lat: 38.11999 Long: -90.28214)

# 2.2 Industrial SO<sub>2</sub> & Meteorological Monitoring near the Doe Run Buick Resource Recycling Facility

The Doe Run Company began SO<sub>2</sub> monitoring at three sites in the area around the Buick Resource Recovery Facility near Boss, Missouri starting January 1, 2017 to meet the requirements of the SO<sub>2</sub> Data Requirements Rule, as described above. Meteorological monitoring is already being conducted at the Buick South lead monitoring site, south of the facility. These sites are being operated under a department-approved QAPP, which includes performance evaluations (audits) by department staff. Locations of these ambient SO<sub>2</sub> monitoring sites was determined on the basis of air quality modeling of the impact of facility emissions, as described in the 2016 Monitoring Network Plan.

### Summary of Doe Run Buick area Industrial Monitoring Stations:

Monitoring Objective: Source Oriented

Spatial Scale of representativeness: Middle Scale (100m<sup>2</sup> to 0.5 km<sup>2</sup>)

West Entrance -SO<sub>2</sub>. (Lat: 37.63211 Long: -91.13565) County Road 75 -SO<sub>2</sub>, (Lat: 37.64876 Long: -91.14890)

Hwy 32 Northeast (Former PSD site) -SO<sub>2</sub>, (Lat: 37.65319 Long: 91.12795)

# 2.3 Industrial SO<sub>2</sub> & Meteorological Monitoring near the Magnitude 7 Metals (formerly Noranda Aluminum) Facility

Magnitude 7 Metals is conducting SO<sub>2</sub> monitoring at three sites and meteorological monitoring at one site in the area around their facility near New Madrid, Missouri. Monitoring at these sites started in January, 2017 to meet the requirements of the SO<sub>2</sub> Data Requirements Rule, as described above. These sites are being operated under a department-approved QAPP, which includes performance evaluations (audits) by department staff. Locations for these ambient SO<sub>2</sub> monitoring sites were determined on the basis of air quality modeling of the impact of facility emissions, and the potential area for meteorological monitoring was determined on the basis of an analysis by a department meteorologist. These evaluations are described in the 2016 Monitoring Network Plan.

<u>Summary of Magnitude 7 Metals area Industrial Monitoring Stations:</u>

Monitoring Objective: Source Oriented

Spatial Scale of representativeness: Middle Scale (100m<sup>2</sup> to 0.5 km<sup>2</sup>)

Site 1 -SO<sub>2</sub>, (Lat: 36.51361 Long: -89.56111) Site 2 -SO<sub>2</sub>, (Lat: 36.50861 Long: -89.56083)

Site 3 -SO<sub>2</sub> and Meteorology, (Lat: 36.50889 Long: -89.57083)

### 2.4 Rider Trail I-70 Site

The department added a sulfur dioxide air monitor to the existing Rider Trail I-70 monitoring site in May 2016. The addition of a sulfur dioxide monitor at this site is to evaluate sulfur dioxide levels in the general area. Any sulfur dioxide concentrations monitored at this site may be due to several emissions sources in the area. If the monitor records sulfur dioxide at levels of concern, the department will gather additional information to try to determine which sources are causing or contributing to the levels of concern. Since the site was installed the fourth highest daily 1-hour SO<sub>2</sub> concentration monitored in 2016 was 14 ppb. The fourth highest daily 1-hour SO<sub>2</sub> concentration monitored in 2017 through 5/22/17 is 10 ppb.

Since the monitor is located in the near-roadway environment and there are several  $SO_2$  sources in the area, the department is initially classifying the spatial scale of representativeness of the  $SO_2$  measurements as middle-scale. This classification may be reevaluated if trends in the monitoring data and other analysis warrant increasing the spatial scale of representativeness. The monitoring objective for this monitor is to measure population exposure.

# 3. National Air Toxics Trends Stations (NATTS), and Other Non-Criteria Pollutant Special Purpose Monitoring

### 3.1 National Air Toxics Trends Stations Monitoring

Routine NATTS monitoring will continue at Blair Street. Operation of the near real time PM<sub>10</sub> Metals Monitor (Xact<sup>TM</sup> 620) at the Blair Street site was discontinued in January 2017 due to lack of funds for extensive repairs to the instrument.

### 3.2 Organic and Elemental Carbon Monitor Evaluation Project

The EPA Office of Air Quality Planning and Standards (OAQPS) contacted the EPA Regional Office and the state of Missouri about participating in a three year monitor evaluation study which began in the summer/fall of 2011. EPA provided the monitor and certain related components in exchange for the state providing in-kind staff time to operate and report data to the EPA Air Quality System (AQS) from the instrument. The location for the study is the Blair St. site, since the site is currently part of the NCore, NATTS and Chemical Speciation monitoring programs. The data from the Blair Street site is used extensively in various health and air pollution studies. Since elemental and organic carbon account for a significant amount of the particulate matter mass measured at this site at various times, understanding the temporal variation in carbon species relative to the 24-hr integrated filter based carbon data will be useful in understanding the local source contributions and diurnal variation in the carbon concentrations. This project will be useful in supplementing ambient air monitoring data objectives addressed in EPA's multi-pollutant monitoring strategy.

Currently, the preliminary near real-time monitoring data for this monitor is being reported each hour to the State of Missouri web page and is being uploaded to AQS.

Continued operation of this instrument is dependent on the availability of funds.

### 3.3 Black Carbon

As part of the condition of receiving one time section 103 Grant funds to implement certain sites for the near-roadway monitoring network, the department will continue to conduct special purpose PM<sub>2.5</sub> black carbon monitoring at the Forest Park and Blue Ridge I-70 near roadway NO<sub>2</sub> sites as well as at the Blair Street NATTS site using aethalometers.

### 4. PM<sub>2.5</sub> Monitoring Network

### 4.1 PM<sub>2.5</sub> SLAMS Network

The TEOM-1405-DF is the primary instrument being used in the state network for  $PM_{2.5}$  measurement. The EPA has also designated the TEOM-1405-DF, operating with firmware version 1.70 and later, as a Federal Equivalent Method (FEM) on November 12, 2013 for  $PM_{10}$  and  $PM_{10-2.5}$ , (http://www.gpo.gov/fdsys/pkg/FR-2013-11-12/pdf/2013-27016.pdf). The Thermo-Fisher 1.71 firmware version has been integrated into the TEOM-1405-DF monitors, and the department is evaluating the performance of the instruments with this firmware for  $PM_{10}$  measurement. Until this evaluation is completed, the  $PM_{10}$  FEM channels from the TEOM-1405-DF instruments are not being reported to AQS. Once the instruments are determined to be successfully operating for these channels, the  $PM_{10c}$  and  $PM_{10}$  parameters will provide more temporal and spatial coverage for  $PM_{10}$  in the network.

Network PM<sub>2.5</sub> collocated FRM requirements were previously satisfied at the Blair Street NCore site in St. Louis and the Troost site in Kansas City. The following page reports the FRM/FEM Comparability statistics (Class III performance criteria of 40 CFR Part 53) for three years of the TEOM-1405-DF (EQPM-0609-182) operating at the Blair Street, St. Louis NCore site. The additive and multiplicative bias meets the Class III performance criteria of 40 CFR Part 53.


The "Revisions to Ambient Monitoring Quality Assurance and Other Requirements; Final Rule," Federal Register volume 81, number 59 (March 28, 2016), effective April 27, 2016, removed the requirement for collocated monitoring for PM<sub>10-2.5</sub> at NCore sites from 40 CFR Part 58. Therefore, operation of the collocated set of filter samplers used for measurement of PM<sub>10-2.5</sub> filter samplers was discontinued at the Blair Street site. At the same time, the TEOM-1405-DF FEM was re-designated as the primary PM<sub>2.5</sub> instrument at this site. The FRM PM<sub>2.5</sub> sampler at Blair Street was re-designated as the collocated reporting FRM sampler for the state network, and also provides PM<sub>2.5</sub> for the calculation of PM<sub>10-2.5</sub> and reporting FRM PM<sub>2.5</sub> for the NCore site. This change allowed the collocated FRM PM<sub>2.5</sub> sampler at the Troost site to be discontinued. Two FRM PM<sub>10</sub> samplers remain at Blair Street: one used to report both PM<sub>10c</sub> (at local conditions) for calculation of PM<sub>10-2.5</sub> and PM<sub>10</sub> at standard conditions, and a second one which provides collocation for the PM<sub>10</sub> measurement. The current PM<sub>2.5</sub> network is summarized in the table below.

Two TEOM-1405-DF instruments are operated at the St. Joseph Pump Station site, one designated as primary, and one as collocated to satisfy the collocation requirement for that FEM method. The department will continue to operate a 1405-F PM<sub>2.5</sub> instrument and a collocated FRM at Ladue in part to evaluate the 1405-F for possible additional future use in the network.


The department also plans to operate a Teledyne API 640x instrument at Blair Street to evaluate this instrument, which measures airborne particulate concentration using light scattering, for possible future use in the network. Procurement and operation of this instrument is subject to availability of funds.

### Class III Performance Criteria of 40 CFR Part 53 Blair Street St. Louis Air Quality System # 29-510-0085 TEOM-1405-DF, EQPM-0609-182 (PM<sub>2.5</sub>) January 2013 through December 2015

Source: EPA AirData PM<sub>2.5</sub> Continuous Monitor Comparability Assessments

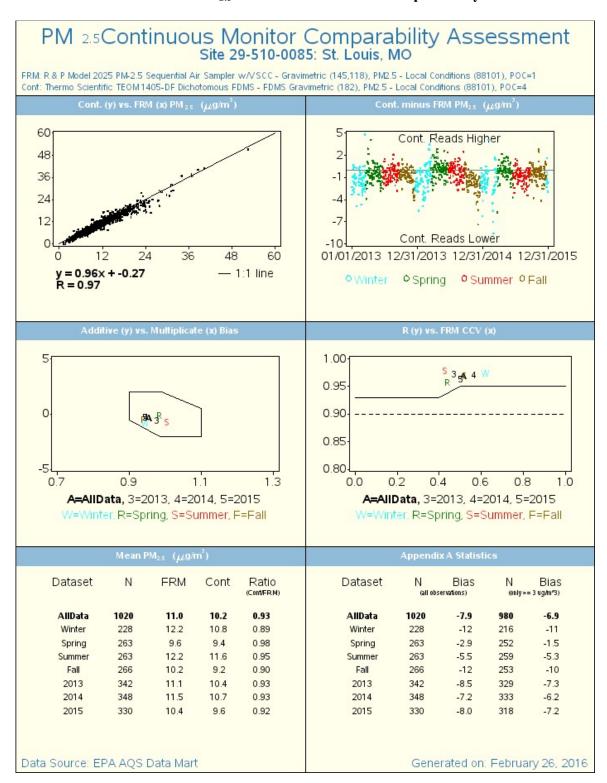

# 2017 Missouri PM<sub>2.5</sub> Monitoring Network\*, NAAQS=35 $\mu$ g/m³ (24 hours), 12 $\mu$ g/m³ (1 year)

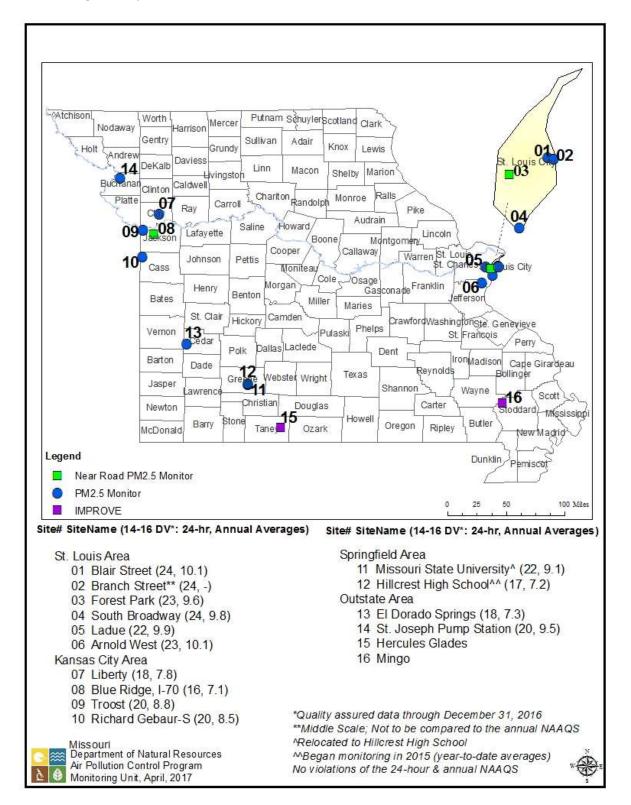

<sup>\*</sup>A Teledyne API 640 x will be added at Blair St. No other changes to the PM<sub>2.5</sub> network are proposed in this plan.

### 4.2 PM<sub>2.5</sub> Chemical Speciation Network (CSN)

PM<sub>2.5</sub> speciation sampling is currently being conducted at two locations: Blair Street in St. Louis and Arnold West. The sampling schedule at Arnold West was modified to every six days in February 2015. Sampling continues to be done every three days at Blair Street.

### 4.3 PM<sub>2.5</sub> Section 103 Federal Funding

The department is not proposing any changes to the PM<sub>2.5</sub> monitoring network. However, this is contingent on EPA providing 100% of the federal Section 103 grant funds at historical levels which are used to operate and maintain the PM<sub>2.5</sub> monitoring network as established. EPA has issued only 65% of the historical Section 103 grant funding levels as of the drafting of this plan. If historical federal section 103 grant funding is not received, the plan will be modified to bring operating expenses in line with the available revenue.

40 CFR 58.14 (c) indicates that "State, or where appropriate, local agency requests for SLAMS monitor station discontinuation, subject to the review of the Regional Administrator, will be approved if any of the following criteria are met and if the requirements of appendix D to this part, if any, continue to be met. Other requests for discontinuation may also be approved on a case-by-case basis if discontinuance does not compromise data collection needed for implementation of a NAAQS and if the requirements of appendix D to this part, if any, continue to be met." If necessary the following monitors will be considered for discontinuation in accordance with 40 CFR 58.14 (c) in this order proportionally to the amount of funding reduced:

Liberty PM<sub>2.5</sub>: The monitor meets the removal criteria of 40 CFR 58.14 and has the lowest design value in the Kansas City Missouri network. The minimum PM<sub>2.5</sub> monitoring requirement of 40 CFR 58 Appendix D is satisfied in the Kansas City area without this monitor. Discontinuance of this monitor would not compromise data collection needed for implementation of the PM<sub>2.5</sub> NAAQS.

Richards Gebaur South PM<sub>2.5</sub>: The monitor meets all but one of the removal criteria of 40 CFR 58.14. The Kansas City area minimum PM<sub>2.5</sub> monitoring requirement of 40 CFR 58 Appendix D is satisfied without this monitor. Although the monitor has greater than 10 percent chance of exceeding 80% of the NAAQS, the monitor has lower annual PM<sub>2.5</sub> averages over the last three years than monitors in metropolitan areas that have only one PM<sub>2.5</sub> monitor (e.g. Springfield and St. Joseph). Discontinuance of this monitor would not compromise data collection needed for implementation of the PM<sub>2.5</sub> NAAQS.

If federal funding reductions are significant and permanent, other cost reduction measures will be evaluated. These include but are not limited to: Additional PM<sub>2.5</sub> monitor reductions, changes to equipment replacement plans, not evaluating the Teledyne API 640x monitoring method, and reconfiguration of hourly continuous monitoring vs. every six day filter based sampling at some sites. Consistent with 40 CFR 58.14(b) if these reductions become necessary the department will provide written communication describing the network changes to the Regional Administrator for review and approval.

# 2017 Missouri $PM_{2.5}$ Monitoring Network

Site	Schedule*	Туре	Agency	Purpose
St. Louis				
1. Blair Street	3	Collocated FRM	ESP	Doubles as PMcoarse Difference method, Quality Assurance
	3	Speciation	ESP	
	Н	TEOM-1405-DF FEM	ESP	24 hr Annual, NAAQS/AQI, Ncore, PM-10-2.5 continous
	н	T640X PM Mass Monitor FEM	ESP	Method Performance Evaluation/Research Not for NAAQS Compliance Determination
2. Branch Street	н	TEOM-1405-DF FEM	ESP	24 hr NAAQS/AQI, PM10-2.5 continuous (unique middle scale monitor†)
3. South Broadway	3. SouthBroadway H TEOM-1405-DF FEM		ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous
4. Ladue	н	TEOM-1405-F FEM	ESP	24 hr & Annual NAAQS/AQI
	6	Collocated FRM	ESP	Quality Assurance
5. Amold West	6	Speciation	ESP	
J. Alliold West	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PMI 0-2.5 continuous
6. For est Park (near-roadway)	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous (micro scale monitor)
Kansas City				
7. Liberty	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous
8. Troost	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PMI 0-2.5 continuous
9. Blue Ridge I-70 (near-roadway)	н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous (micro scale monitor)
10. Richards-Gebaur South	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous
Springfield				
11. Hill crest High School	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous
St. Joseph				
12. St. Joseph Pump Station	Н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PM10-2.5 continuous
	Н	Collocated TEOM-1405-DF FEM	ESP	Quality Assurance
Outstate			-	
13. El Dorado Sprines	н	TEOM-1405-DF FEM	ESP	24 hr & Annual NAAQS/AQI, PMI 0-2.5 continuous
Dorado opring	- 11	LONFITO-DI FEM	and a	are a considerate and
			Fish & Wildlife	
14. Mingo	3	IMPROVE	Service	
15. Hercules Glades	3	IMPROVE	Forest Service	
* 3 = Every third day, 6 = Every sixth				M <sub>2.5</sub> NAAQS consistent with 40 CFR 58.30.

### 5. Ozone Monitoring Network

The Foley monitoring site (site no. 15 in the map below) was relocated before the start of the 2017 ozone monitoring season in March 2017. This change was required for logistical reasons (change in property ownership). The new location is 1.49 kilometers east of the former site and therefore within less than 4 kilometers of the former site and representative of the same air mass (see Figure 5-1). In accordance with the system modification requirements of 40 CFR 58.14(c)(6) and consistent with the discussion of unanticipated network modifications in the Introduction to this document, details of this change were communicated in writing to EPA Region VII staff. The new site is referred to as Foley West (because it is west of the town of Foley) to distinguish it from the former site.

The department proposes to discontinue operation of the Branson ozone monitoring site after the end of the 2017 ozone season, October 31, 2017. The Branson site was established in 2010 and designated as a special purpose monitoring (SPM) station and, therefore, does not require US EPA approval for discontinuation. Nevertheless, the following discussion of monitoring results from that site is presented in support of this decision.

The following table lists the ozone design values measured at Branson for the five most recent three-year periods. None of these design values shows violation of the 0.070 ppm (70 ppb) ozone primary NAAQS. The Branson monitor measured the lowest design value of all the ozone monitors in the state in 2014-2016, and it is not needed to fulfill network requirements.

Time Period	Ozone Design Value, ppb			
	(3-year average of annual 4 <sup>th</sup> highest daily 8-hour average concentration)			
2010-2012	70			
2011-2013	68			
2012-2014	64			
2013-2015	60			
2014-2016	57			

The average of these design values is 63.8 ppb.

Calculation of the upper bound of the 90 percent confidence interval based on the five design values listed in the table (following the procedure described in Section 4.1 of *AMBIENT AIR MONITORING NETWORK ASSESSMENT GUIDANCE, Analytical Techniques for Technical Assessments of Ambient Air Monitoring Network*, EPA-454/D-07-001, 2007) results in a value of 68.9 ppb, which exceeds 80 percent of the level of the NAAQS (56) and so does not meet the requirement in 40 CFR 58.14 c for discontinuation of a SLAMS site if this procedure is applied. However, this result does not apply to SPM monitors and does not take into account the consistent decrease in design values.

Figure 5-2 shows a time-series plot of these design values. The straight line in the figure is a linear regression fit to the data, and the data are fit well by a straight line. If the linear fit to the data is extrapolated to a sixth three-year period (2015-2017), the predicted design value for that period is 53.6 ppb, which remains below the level of the NAAQS. Of course, the linear

decreasing trend cannot continue indefinitely, but the monotonically decreasing design values suggest that the decreasing trend will continue for some time, and the design value at this site would be expected to remain below the level of the NAAQS. Also, the excellent linear fit suggests that the width of the 90 percent confidence interval would be considerably less than that estimated above that only considers the average and does not take into account the decreasing trend.


There are no other planned changes to the ozone monitoring network, and ozone monitoring will continue to be conducted all year at the Mark Twain State Park (MTSP) site to collect ozone background concentrations need for PSD modeling projects and at Blair Street to meet the NCore ozone monitoring requirement. The current monitoring network is based on the current ozone standard and ground-level ozone air quality monitoring network design requirements. The current ozone monitoring network meets the population-based requirements in 40 CFR 58 Appendix D, which requires a minimum of two sites each in the St. Louis, Kansas City, and Springfield areas. The ozone monitoring requirement for the Fayetteville-Springdale-Rogers CBSA is met by two ozone monitoring sites in Arkansas, which is reasonable, since 96 percent of the population of that CBSA is in Arkansas and only 4 percent in Missouri.

Reduction of the ozone NAAQS to 70 ppb was published in the Federal Register in October 2015, effective in December 2015. That change also included extension of the ozone monitoring season in Missouri to include the month of March and a requirement for photochemical assessment monitoring stations (PAMS) at NCore sites in nonattainment areas starting in 2019. See Section 9 below for the PAMS implementation plan.


Figure 5-1. Aerial photograph showing the locations of the former (west end of line) and current (east end of line) Foley monitoring sites.



Figure 5-2.

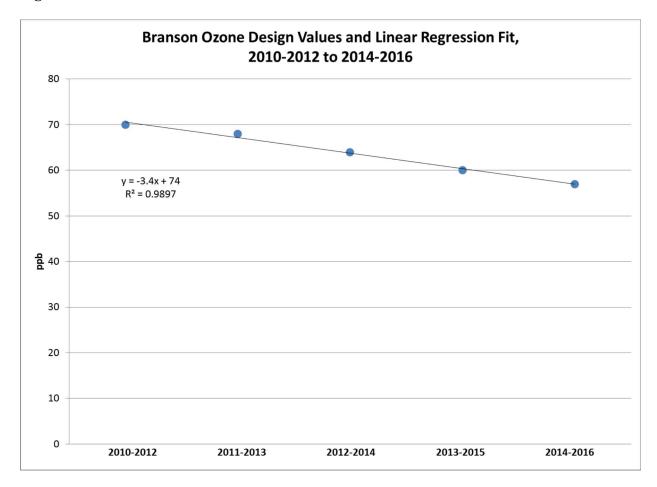

### 2017 Missouri Ozone (O<sub>3</sub>) Monitoring Network\*, NAAQS=70 ppb (8 hour)

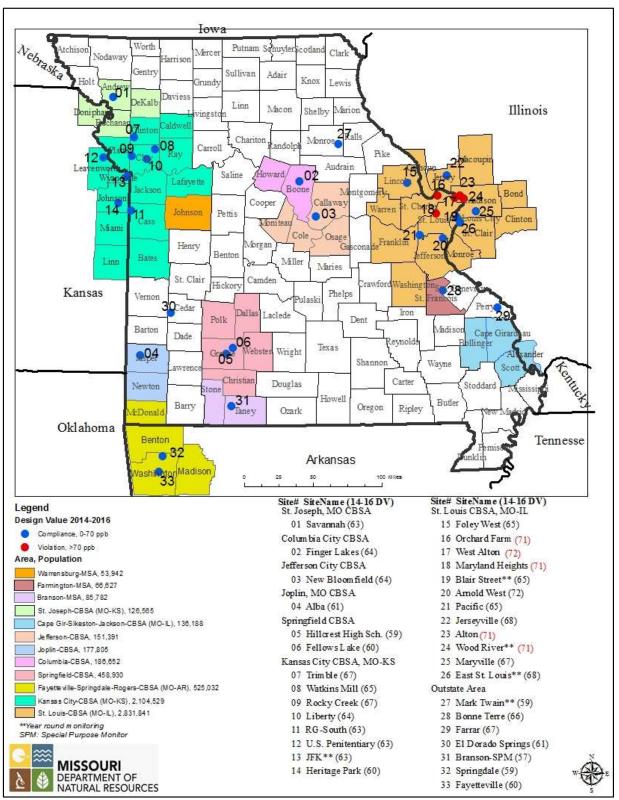

<sup>\*</sup>Foley was relocated to Foley West before the start of 2017  $O_3$  monitoring. Branson is proposed for discontinuation at the end of the 2017  $O_3$  season. No other changes to the  $O_3$  network are proposed in this plan.


### 6. PM<sub>10</sub> Monitoring Network

As discussed in Section 4, the TEOM-1405-DF monitor has the capability of reporting PM<sub>10</sub> along with the PM<sub>2.5</sub> FEM measurements. The 1.71 firmware version has been integrated into the TEOM-1405-DF instruments, and the department is evaluating the performance of the monitors for PM<sub>10</sub> measurement through data analysis. Once the PM<sub>10</sub> data from these instruments is determined to be acceptable, the number of continuous PM<sub>10</sub> monitors comparable to the NAAQS will increase by three (3) sites to include Blair Street, Ladue, and South Broadway in the St. Louis area. This will bolster the count of PM<sub>10</sub> monitors in this CBSA to a total count of nine (9) monitors, more than enough to meet the minimum monitoring requirements specified in 40 CFR 58 Appendix D §4.6 (not including the microscale Forest Park site). The PM<sub>10</sub> minimum monitoring requirement in the Kansas City CBSA is also being met currently by the Troost and Front Street sites in Missouri and the JFK site in Kansas. Pending successful integration of the 1.71 firmware into the TEOM 1405 DF's, the TEOM 1405 DF PM<sub>10</sub> FEM channel can also be used for PM<sub>10</sub> NAAQS compliance reporting at Hillcrest, Troost, St. Joseph Pump Station, Arnold West, and Branch Street. This would allow us to eventually replace the TEOM-1400ab instruments at Hillcrest, Branch St., and Arnold West and the TEOM 1405 instruments at Troost and St. Joseph Pump Station.

The 2016 estimated population of the Fayetteville-Springdale-Rogers CBSA is 525,032, but only 4 percent of this population (22,620) is in Missouri. Therefore, the PM<sub>10</sub> monitoring requirement for this area should be met by establishment of a monitoring site in Arkansas, and we understand through correspondence from the Arkansas Department of Environmental Quality that such a site has been established as of January 1, 2017.

A collocated  $PM_{10}$  TEOM-1400ab monitor was installed at the Carthage site in April 2016. The  $PM_{10}$  low volume samplers at Troost and St. Joseph Pump Station have been replaced with TEOM 1405 instruments. This leaves only the Blair Street site with a low-volume filter-based  $PM_{10}$  sampler and a collocated low-volume filter-based  $PM_{10}$  sampler, which meets the collocation requirement.

### 2017 Missouri PM<sub>10</sub> Monitoring Network\*, NAAQS=150 μg/m<sup>3</sup> (24 hour)

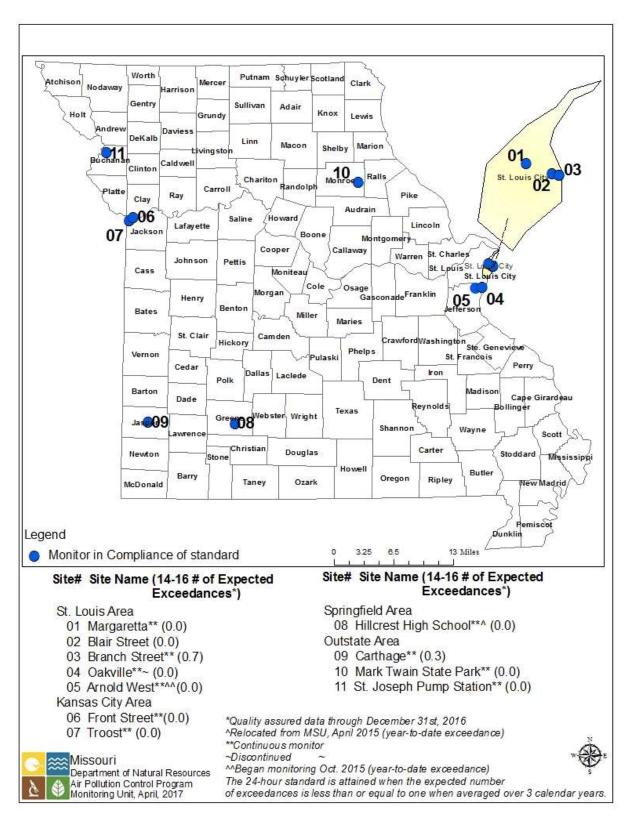

<sup>\*</sup>No changes to the PM<sub>10</sub> network are proposed in this plan.

### 7. Nitrogen Dioxide (NO<sub>2</sub>) Monitoring Network

Requirements for near-roadway NO<sub>2</sub> monitoring are being met in the St. Louis area by the Forest Park I-40/64 and Rider Trail 1-70 monitoring sites. The requirement for near roadway NO<sub>2</sub> monitoring in the Kansas City area is being met by the Blue Ridge I-70 site. The community-wide monitoring network requirement of 40 CFR 58 Appendix D, 4.3.3(a) is satisfied by the existing Troost and Margaretta monitoring sites.

EPA has identified the Margaretta NO<sub>2</sub> site as one of the minimum of forty additional NO<sub>2</sub> monitoring stations nationwide in any area, inside or outside of CBSAs, above the minimum monitoring requirements, with a primary focus on siting these monitors in locations to protect susceptible and vulnerable populations. This requirement is the responsibility of the respective Regional Administrators working with their respective states consistent with 40 CFR 58 Appendix D, 4.3.4(a). For additional information about this topic consult the following EPA website resource: <a href="http://www.epa.gov/ttn/amtic/sypop.html">http://www.epa.gov/ttn/amtic/sypop.html</a>


The department added, in 2013, photolytic NO<sub>2</sub> monitors at the Blair Street NCore site and the Forest Park near-roadway site in St. Louis. Now that the evaluation project is complete, the photolytic NO<sub>2</sub> instrument from Forest Park has been moved to Blair Street and is the primary instrument. The Blair instrument is now a backup to the primary. Photolytic NO<sub>2</sub> monitoring is identified in EPA's long term monitoring strategy, and this monitoring supplement the required NOy monitoring being conducted at the NCore site.

### 7.1 NO<sub>2</sub> Near-Roadway Monitoring

The final rule published in 2010 revising the NAAQS to add the 1-hour standard of 100 ppb (3-year average of annual 98<sup>th</sup> percentile) requires near-road NO<sub>2</sub> monitoring at two sites in the St. Louis CBSA (population 2.8 million) and one site in the Kansas City CBSA (population 2.0 million), based on population and traffic count. Sites were to be identified in the 2012 air monitoring network plan and begin operation by 1/1/2013. The schedule was revised in a rulemaking published in 2013 that required the first St. Louis area near-road site to begin operation in January 2014, the Kansas City area site to begin operation in January 2014, and the second St. Louis area site to begin operation in January 2015. Due in part to receipt of EPA funding for establishment of near-road sites, the department established the first St. Louis area site in January 2013, and the Kansas City area site was established in July 2013. The second near-roadway site in the St. Louis area was established in January 2015. The site selection process was described in the 2013 Monitoring Network Plan, http://dnr.mo.gov/env/apcp/2013monitoringnetworkplan.pdf.

The first St. Louis area near-roadway site, Forest Park, is located adjacent to I-64 west of downtown St. Louis. Air monitoring results at that site are consistent with commuter traffic, heaviest on weekday mornings. The second St. Louis area site, called Rider Trail S. I-70, is adjacent to Interstate 70 just west of Interstate 270. Interstate 70 extends across the United States and carries through traffic in addition to commuter traffic and other local traffic. Therefore, the fleet mix and congestion patterns relative to time of day and day of the week are expected to be different than at the first site.

**2017** Missouri Nitrogen Dioxide (NO<sub>2</sub>) Monitoring Network\*, NAAQS=100 ppb (1 hour) (2014-2016 Design Values)

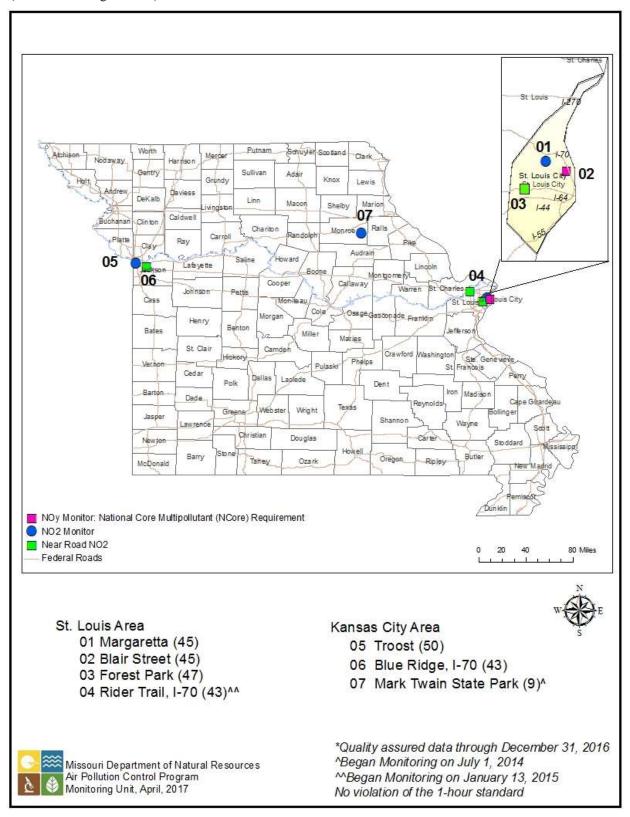


<sup>\*</sup>No changes to the NO<sub>2</sub> network are proposed in this plan.

### 8. Carbon Monoxide (CO) Monitoring Network

On August 12, 2011, the EPA issued a decision to retain the existing NAAQS for CO. A final rule published on August 31, 2013 requires near-road CO monitoring at one site in the St. Louis CBSA by 1/2015 and one site in the Kansas City CBSA by 1/2017. The department established CO monitoring sites at the same time as the  $NO_2$  monitoring sites at the Forest Park I-40/64 and Blue Ridge I-70 near-roadway monitoring sites. No changes to the CO monitoring network are proposed in this plan.

# 2017 Missouri Carbon Monoxide (CO) Monitoring Network\*, NAAQS=35 ppm (1 hour, 9 ppm (8 hour)

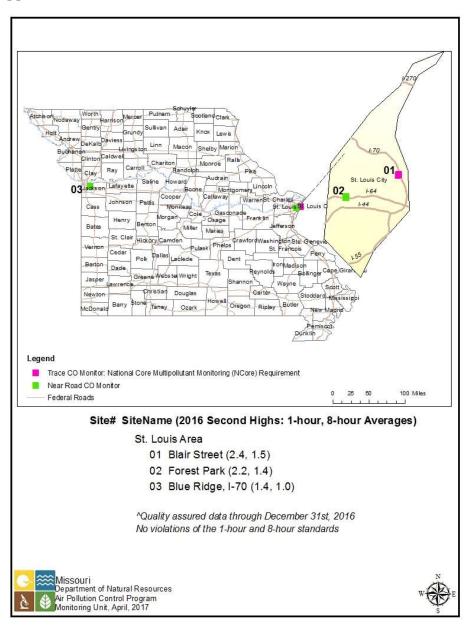

<sup>\*</sup>No changes to the CO network are proposed in this plan.

### 9. Photochemical Assessment Monitoring Station Implementation Plan

### 9.1 Introduction: Regulatory Requirements and Guidance Documents

The "National Ambient Air Quality Standards for Ozone; Final Rule," <u>Federal Register</u>, 80, 206 (October 26, 2015), included amendment of 40 CFR, Part 58, Appendix D (5) to include the following:

- "5. NETWORK DESIGN FOR PHOTOCHEMICAL ASSESSMENT MONITORING STATIONS (PAMS) AND ENHANCED OZONE MONITORING
- (a) State and local monitoring agencies are required to collect and report PAMS measurements at each NCore site required under paragraph 3(a) of this appendix located in a CBSA with a population of 1,000,000 or more, based on the latest available census figures.
- (b) PAMS measurements include:
- (1) Hourly averaged speciated volatile organic compounds (VOCs);
- (2) Three 8-hour averaged carbonyl samples per day on a 1 in 3 day schedule, or hourly averaged formaldehyde;
- (3) Hourly averaged O3;
- (4) Hourly averaged nitrogen oxide (NO), true nitrogen dioxide (NO2), and total reactive nitrogen (NOy);
- (5) Hourly averaged ambient temperature;
- (6) Hourly vector-averaged wind direction;
- (7) Hourly vector-averaged wind speed;
- (8) Hourly average atmospheric pressure;
- (9) Hourly averaged relative humidity;
- (10) Hourly precipitation;
- (11) Hourly averaged mixing-height;
- (12) Hourly averaged solar radiation; and
- (13) Hourly averaged ultraviolet radiation...
- (g) At a minimum, the monitoring agency shall collect the required PAMS measurements during the months of June, July, and August."

The same rule included amendment of 40 CFR, Part 58.10 (a) (10) to include the following:

"A plan for making Photochemical Assessment Monitoring Stations (PAMS) measurements, if applicable, in accordance with the requirements of appendix D paragraph 5(a) of this part shall be submitted to the EPA Regional Administrator no later than July 1, 2018. The plan shall provide for the required PAMS measurements to begin by June 1, 2019."

The US EPA has published a guidance document entitled "PAMS Required Sites Quality Assurance Implementation Plan [QAIP]," October 2016,

https://www3.epa.gov/ttn/amtic/files/ambient/pams/PAMS%20Quality%20Assurance%20Implementation%20Plan\_092716\_V4.0.pdf. The QAIP provides guidance for both US EPA and monitoring organizations in implementation of the above-referenced PAMS requirements. The QAIP includes the following recommendations:

"Monitoring organization PAMS Implementation Plan: The monitoring organization Implementation Plan document will specify how the monitoring organization will perform the measurements for the Required Network. The plan will include details on activities such as monitoring site location, costs, and schedule of events, among other information. The plan will also include any waivers to siting or monitoring methods." (page 13)

"Monitoring organizations should have their PAMS waivers and Required Network Implementation Plans finalized by July 2017 and must have them completed by the end of October 2017.<sup>20</sup>

<sup>20</sup> The regulation requires that monitoring organization Required Network IPs be developed in their Annual Network Plans due July 2018. However, in order to be operational by June 2019, it would be beneficial to have plans finalized by the end of October 2017." (page 21)

US EPA is also developing additional guidance including a PAMS Technical Assistance Document (TAD), standard operating procedures for some of the instrument systems, and either a national Quality Assurance Project Plan (QAPP) or model QAPP for monitoring organizations. US EPA also conducts monthly conference calls to disseminate information and guidance on PAMS monitoring.

This section of the 2017 Monitoring Network Plan is intended to fulfill the regulatory requirement in 40 CFR, Part 58.10 (a) (10) for submittal of a PAMS implementation plan by July 2018 and to meet the recommended schedule in the QAIP for submittal of the plan by July 2017 in advance of the regulatory requirement. An updated version of this plan will also be included in the 2018 Monitoring Network Plan. That plan will include any changes resulting from revision in regulatory requirements, additional guidance or planning documents from US EPA, and other additional developments in preparation and planning for PAMS monitoring during the year between Monitoring Network Plans.

#### 9.2 PAMS Measurements

MoDNR will conduct PAMS monitoring at the Blair Street Station in St. Louis. The Blair Street Station is an NCore site in a CBSA with a population of greater than 1,000,000. The NCore site in the Kansas City CBSA is in Kansas City, Kansas. Accordingly, we expect that PAMS monitoring in the Kansas City CBSA will be conducted by the state or local agency responsible for operation of that site.

PAMS monitoring will begin at Blair Street in June 2019 and will be conducted during the months of June, July, and August each year as long as the regulatory requirements are in place and funding is available to support this activity.

MoDNR does not plan to request any of the waivers from US EPA described in 40 CFR, Part 58, Appendix D (5) (c) through (f).

Each of the required measurements in 40 CFR, Part 58, Appendix D (5) (b) is discussed below.

1. Hourly averaged speciated volatile organic compounds (VOCs). US EPA has evaluated several gas chromatographs (GC) designed to measure concentrations of hourly average speciated VOCs. US EPA plans to develop national contracts with up to three of the vendors of these GC systems and provide an instrument from one of the vendors to each monitoring organization that is required to conduct PAMS monitoring. Based on information available at this time, MoDNR expects to select either the Markes Unity-XR Thermal Desorber with Agilent 7890B Auto-Gas Chromatograph with Flame Ionization Detection or the Consolidated Analytical Systems (CAS)/Chromatotec AirmOzone Auto-Gas Chromatograph with Flame Ionization Detection. Use of either of these systems will also require procurement and installation of additional equipment and supplies, including a sampling manifold, zero air supply, gas dilution calibrator, calibration gas and associated regulators, and data logger. This list will be refined and become more detailed as more information becomes available and after the specific VOC instrument system is selected. This element of the required PAMS measurements is clearly the one that will require the most planning and preparation and will be the most laborintensive during each summer measurement season.

The table below lists target compounds for this measurement (carbonyl compounds included in the table will be measured in samples described under 2 below).

2. Three 8-hour averaged carbonyl samples per day on a 1 in 3 day schedule, or hourly averaged formaldehyde. We will procure, install, and utilize a sampler capable of collecting multiple 8-hour samples using derivatized sorbent tubes according to EPA method TO-11A. An example of such a sampler is the ATEC 8000 series. We are not aware of an instrument currently available at reasonable cost that reliably measures hourly-averaged formaldehyde; this requirement was likely written into the regulation in anticipation of future instrument development. We expect that analysis of TO-11A samples for the carbonyls listed in the table below (identified by footnote c) will be made available by US EPA using their national contract analytical laboratory.

### **PAMS Target Compound List**

	Priority Compounds	Optional Compounds				
1	1,2,3-trimethylbenzene <sup>a</sup>	1	1,3,5-trimethylbenzene			
2	1,2,4-trimethylbenzene <sup>a</sup>	2	1-pentene			
3	1-butene	3	2,2-dimethylbutane			
4	2,2,4-trimethylpentane b	4	2,3,4-trimethylpentane			
5	acetaldehyde <sup>b,c</sup>	5	2,3-dimethylbutane			
6	acetone <sup>c,a</sup>	6	2,3-dimethylpentane			
7	benzene <sup>a,b</sup>	7	2,4-dimethylpentane			
8	c-2-butene	8	2-methylheptane			
9	ethane <sup>d</sup>	9	2-methylhexane			
10	ethylbenzene <sup>a,b</sup>	10	2-methylpentane			
11	ethylene	11	3-methylheptane			
12	formaldehyde b,c	12	3-methylhexane			
13	isobutane	13	3-methylpentane			
14	isopentane	14	acetylene			
15	isoprene	15	c-2-pentene			
16	m&p-xylenes <sup>a,b</sup>	16	cyclohexane			
17	m-ethyltoluene <sup>a</sup>	17	cyclopentane			
18	n-butane	18	isopropylbenzene <sup>b</sup>			
19	n-hexane <sup>b</sup>	19	m-diethlybenzene			
20	n-pentane	20	methylcyclohexane			
21	o-ethyltoluene <sup>a</sup>	21	methylcyclopentane			
22	o-xylene <sup>a,b</sup>	22	n-decane			
23	p-ethyltoluene <sup>a</sup>	23	n-heptane			
24	propane	24	n-nonane			
25	propylene	25	n-octane			
26	styrene <sup>a,b</sup>	26	n-propylbenzene <sup>a</sup>			
27	toluene <sup>a,b</sup>	27	n-undecane			
28	t-2-butene	28	p-diethylbenzene			
		29	t-2-pentene			
		30	α/β-pinene			
		31	1,3 butadiene <sup>b</sup>			
		32	benzaldehyde <sup>c</sup>			
		33	carbon tetrachloride <sup>b</sup>			
		34	ethanol			
		35	tetrachloroethylene <sup>b</sup>			

Source: Revisions to the Photochemical Assessment Monitoring Stations Compound Target List, US EPA, November 20, 2013

<sup>&</sup>lt;sup>a</sup> Important SOAP (Secondary Organic Aerosols Precursor) Compounds <sup>b</sup> HAP (Hazardous Air Pollutant) Compounds

<sup>&</sup>lt;sup>c</sup> Carbonyl compounds

<sup>&</sup>lt;sup>d</sup> Non-reactive compounds, not considered to be VOC for regulatory purposes

- <u>3. Hourly Averaged O<sub>3</sub></u>. Hourly averaged ozone is already measured at Blair Street as a part of the NCore requirements and will continue.
- 4. Hourly averaged nitrogen oxide (NO), true nitrogen dioxide (NO<sub>2</sub>), and total reactive nitrogen ( $\overline{NO_y}$ ). NO and NO<sub>y</sub> are already measured at Blair Street as a part of the NCore requirements and will continue. True NO<sub>2</sub> is already measured at Blair Street using an analyzer with a photolytic NO<sub>2</sub> converter; this measurement will also continue.
- 5. -10. Hourly averaged ambient temperature, hourly vector-averaged wind direction, hourly vector-averaged wind speed, hourly average atmospheric pressure, hourly averaged relative humidity, and hourly precipitation. Temperature, wind direction, wind speed, atmospheric pressure, and relative humidity are already measured at Blair Street and will continue. We will procure, install, and utilize a precipitation measurement instrument.
- 11. Hourly averaged mixing height. US EPA plans to develop a national contract with one or more vendors of ceilometers, which are instruments using a laser to measure mixing height, and provide an instrument to each monitoring organization that is required to conduct PAMS monitoring. Based on information available at this time, MoDNR expects that the ceilometer to be installed and utilized is likely to be a Vaisala CL-51 with appropriate software.
- 12. Hourly averaged solar radiation. Solar radiation is already measured at Blair Street and will continue.
- 13. Hourly averaged ultraviolet radiation. We will procure, install, and utilize an ultraviolet radiation measurement instrument.

#### 9.3 PAMS Implementation Schedule and Resource Requirements

The following table lists some of the major schedule elements associated with implementation of PAMS measurement and tentative starting and ending dates (month and year) for each activity. It is based on the QAIP referenced above and associated information from US EPA, and includes relevant activities planned by US EPA. As noted in the table, timing of some of the schedule elements, especially capital equipment acquisition, depends on availability of funding and/or availability of instrumentation from national contracts; if the availability of funding or of instrumentation from national contracts is delayed, other schedule elements will be delayed, and startup of sampling in June 2019 could be jeopardized.

Personnel resource and cost estimates for this activity are being developed by MoDNR and will be communicated separately to US EPA Region 7 staff.

### **Tentative PAMS Implementation Schedule**

	Start	Finish
QA Related Tasks		
<b>EPA</b> : PAMS TAD and Auto GC SOPs and workgroup review/iteration/comment	2/17	7/17
<b>EPA</b> : PAMS generic QAPP and SOPs (NO2, ceilometer, carbonyl sampling/analysis)	7/17	12/17
and review/iteration/comment		
EPA: PAMS proficiency testing (PT) and TSA program development and	11/17	4/18
review/iteration/comment		
EPA: Development of quality control/PT reports	4/18	9/18
MoDNR: Draft PAMS QAPP and SOPs	12/17	8/18
EPA (Region 7): Review QAPP and SOPs	8/18	10/18
MoDNR: Finalize QAPP and SOPs	11/18	2/19
EPA: TSA audit training/readiness reviews	10/18	3/19
EPA: Proficiency testing on operational sites/labs	10/18	5/19
Implementation Tasks		•
MoDNR: Implementation plan development (this plan)	1/17	6/17
MoDNR: Personnel resource and cost estimate planning and development	1/17	12/17
MoDNR: Continue to participate in monthly PAMS conference calls and review	1/17	5/19
guidance documents as available		
EPA and MoDNR: Capital equipment acquisition from national contract (GC and	11/17	4/18
ceilometer; depends on EPA schedule)		
MoDNR: Other equipment and supplies acquisition (depends on funding	7/17	4/18
availability)		
MoDNR: Equipment installation	4/18	10/18
MoDNR: Equipment shakedown/testing	4/18	5/19
MoDNR: First PAMS measurement season	6/19	8/19

#### NETWORK DESCRIPTION/COMPONENTS

See Appendix 1 for the Network Description, which includes the following components.

#### Site Data

All ambient air monitoring sites are recorded in the EPA's Air Quality System database. Data includes location data such as latitude & longitude.

#### Air Quality System Site Code

The site code includes a numerical designation for State, county, and individual site. The state and county codes are assigned a number based on the alphabetical order of the State or county. Site numbers are assigned sequentially by date established in most counties. St. Louis County sites also have a division for municipality within St. Louis County.

#### Street Address

The official Post Office address of the lot where the monitors are located. Because not all sites are located in cities or towns, the street address is occasionally given as the intersection of the nearest streets or highways.

#### Geographical Coordinates

The coordinate system used by Missouri Department of Natural Resources is latitude and longitude.

#### **Air Quality Control Region**

Air Quality Control Regions, or AQCR, are defined by EPA and designates either urban regions, like St. Louis or Kansas City, or rural sections of a state, such as northeast or southwest Missouri.

<u>AQCR</u>	AQCR Name
070	Metropolitan St. Louis
094	Metropolitan Kansas City
137	Northern Missouri
138	SE Missouri
139	SW Missouri

#### Core Based Statistical Area

Core Based Statistical Areas, or CBSA are defined by the U.S. Census Bureau.

CBSA Code	CBSA Name
00000	Not in a CBSA
16020	Cape Girardeau-Jackson, MO-IL
17860	Columbia, MO
27620	Jefferson City, MO
27900	Joplin, MO
28140	Kansas City, MO-KS
41140	St. Joseph, MO-KS
41180	St. Louis, MO-IL

### 44180 Springfield, MO

#### Monitor Data

Each monitor is designed to detect a specific chemical pollutant or group of related pollutants. A site may have one or many monitors and not all sites will have the same monitors.

#### Pollutant

The common name of the pollutant. "Criteria" pollutants are defined by statute in the Clean Air Act.

#### Air Quality System Pollutant Code

Each pollutant has a specific numerical code to distinguish it from others.

Pollutant Code	<u>Pollutant</u>
14129	Lead – Local Conditions
42101	Carbon Monoxide
42401	Sulfur Dioxide
42406	Sulfur Dioxide 5-min
42600	Reactive Oxides of N (NOY)
42601	Nitric Oxide
42602	Nitrogen Dioxide
42603	Oxides of Nitrogen
44201	Ozone
61103	Resultant Wind Speed
61104	Resultant Wind Direct
62101	Outdoor Temperature
62107	Indoor Temperature
62201	Relative Humidity
63301	Solar Radiation
64101	Barometric Pressure
68105	Average Ambient Temperature
68108	Sample Baro Pressure
81102	$PM_{10}$
88313	Black Carbon-Local Condition
85101	$PM_{10}$ - $LC$
85129	Lead PM10 LC - FRM/FEM
86101	PMCoarse - LC (FRM Diff)
88101	$PM_{2.5}$ FRM
88500	PM <sub>2.5</sub> Tot Atmospheric
88502	PM <sub>2.5</sub> AQI/Speciation
88503	PM <sub>2.5</sub> Reference
61106	Sigma Theta
62106	Temperature Difference
65102	Precipitation
88314	UV Carbon PM2.5-Local Condition

85102	Antimony
85103	Arsenic PM10 LC
85107	Barium PM10 LC
85109	Bromine PM10 LC
85110	Cadmium PM10 LC
85111	Calcium PM10 LC
85112	Chromium PM10 LC
85113	Cobalt PM10 LC
85114	Copper PM10 LC
85126	Iron PM10 LC
85128	Lead PM10 LC
85132	Manganese PM10 LC
85136	Nickel PM10 LC
85142	Mercury PM10 LC
85154	Selenium PM10 LC
85160	Tin PM10 LC
85161	Titanium PM10 LC
85164	Vanadium PM10 LC
85166	Silver PM10 LC
85167	Zinc PM10 LC
85173	Thallium PM10 LC
85180	Potassium PM10 LC
88160	Tin PM10 LC
88305	OC CSN Unadj PM2.5 LC TOT
88312	Total Carbon PM2.5 LC TOT
88316	Optical EC PM2.5 LC TOT

#### Parameter Occurrence Code

The Parameter Occurrence Code (POC) distinguishes between different monitors for the same pollutant, most often collocated monitors used for precision and quality assurance. For PM<sub>2.5</sub>, different parameter occurrence codes are assigned to FRM, collocated FRM, continuous, and speciation monitors.

#### Collocated

Collocated monitors are used for precision and quality assurance activities, and for redundancy for critical pollutants such as ozone.

#### Sampling Frequency

Sampling frequency varies for each pollutant, depending on the nature of the NAAQS standard and the technology used in the monitoring method. Most gaseous pollutants, PM<sub>2.5</sub> and PM<sub>10</sub> monitors use continuous monitoring FEM methods and are averaged over

one hour. Some particulate pollutants are filter-based FRM methods and averaged over one day.

#### Scale of Representation

Each monitor is intended to represent an area with similar pollutant concentration. The scales range from only a few meters to many kilometers.

- MIC Microscale defines the concentration in air volumes associated with area dimensions ranging from several meters up to about 100 meters.
- MID Middle defines the concentration typical of areas up to several city blocks in size with dimensions ranging from about 100 meters to 0.5 kilometers.
- NBR Neighborhood defines concentrations within an extended area of a city that has relatively uniform land use with dimensions in the 0.5 to 4.0 kilometers.
- <u>URB</u> <u>Urban</u> defines an overall citywide condition with dimensions on the order of 4 to 50 kilometers.
   <u>REG</u> <u>Regional</u> defines air quality levels over areas having dimensions of 50 to hundreds of kilometers.

### **Monitor Type**

The monitor's administrative classification as determined by the purpose for the monitor in the agency sampling strategy. Assignment of monitor types "NCORE" and "PAMS" is limited to EPA Headquarters and is done only after a complete review and approval is done for all site/monitor metadata.

Code	<u>Description</u>
IMPROVE	IMPROVE or IMPROVE Protocol
INDEX SITE	(not currently used by MO)
INDUSTRIAL	Used to indicate sites operated by an industry Primary
	Quality Assurance Organization (PQAO)
NATTS	National Air Toxics Trends Station
NON-EPA FEDERAL	(not currently used by MO)
NON-REGULATORY	Not used for NAAQS Compliance
PAMS	(not currently used by MO)
PROPOSED NCORE	
QA COLLOCATED	Collocated to Satisfy 40 CFR Part 58, Appendix A
SLAMS	State or Local Air Monitoring Station
SPECIAL PURPOSE	Special Purpose Monitoring Station (SPM or SPMS)
SUPLMNTL SPECIATION	
TRENDS SPECIATION	
TRIBAL MONITORS	(not currently used by MO)
UNOFFICIAL PAMS	(not currently used by MO)

#### **State Monitoring Objective**

Each monitor has a distinct objective such as providing real-time data for public awareness or use in determining compliance with regulations. The state monitoring objective provides more information about the purpose of the monitoring in addition to the monitor objective required of 40 CFR 58.10(a)(6).

State Objective Code	<u>Objective</u>
AQI	<b>Public Information</b>
COM	<b>NAAQS</b> Compliance
MET	Meteorological Data
RES	Research
STA	State Standard

#### **Units**

The physical terms used to quantify the pollutant concentration, such as parts per million or micrograms per cubic meter.

<b>Unit Code</b>	Unit Description
001	$\mu g/m^3$
007	parts per million
008	parts per billion
011	meters per second
012	miles per hour
013	knots
014	degree, compass
015	degree Fahrenheit
016	millbars
017	degree Celsius
018	Langleys
019	percent humidity
021	inches
022	inches Mercury
025	Langleys per minute
059	Millimeter (Mercury)
073	Liters/minute STP-Flow
077	Micrograms
079	Watts/m <sup>2</sup>
083	Cubic meter/minute
105	μg/m³ LC
106	Minutes
107	Percent
118	Liters/minute LC-Flow
119	Cubic meters/minute LC-Flow
121	parts per trillion

#### Monitoring/Analytical Method

Each monitor relies on a scientific principle to determine the pollutant concentration, which is described by the sampling method. Each method code is specific for a particular pollutant; therefore a three numeral code may be used for different methods for different pollutants. This is required of 40 CFR 58.10(a)(3).

#### **Monitoring Objective**

This is the primary monitoring objective(s) for the monitoring parameter required of 40 CFR 58.10(a)(6). The monitoring Objective is specific to the pollutant. Some sites may have more than one monitoring objective, but the primary objective is listed first.

### APPENDIX 1: MISSOURI MONITORING NETWORK DESCRIPTION

# Missouri Ambient Air Monitoring Network



MIC Microscale Several meters up to about 100 meters

MID Middle 100 meters to 0.5 kilometer NBR Neighborhood 0.5 to 4.0 kilometers range

URB Urban 4 to 50 kilometers

REG Regional Tens to hundreds of kilometers

COM National Ambient Air Quality Standards (NAAQS) Compliance

MET Meteorological Data N/A Not Applicable

NCore National Multi-Pollutant Monitoring Stations

NON-A Non-Ambient Site NON-R Non-Regulatory

PQAO Primary Quality Assurance Organization

RES Research

**SLAMS** State and Local Monitoring Stations

SIP State Implementation Plan

SPEC Speciation STA State Standard

SPM Special Purpose Monitoring SPP Special Purpose Project

Keep Monitor under performance evaluation. Data is not reported to EPA Air Quality System (AQS)

Thursday, June 01, 2017 Page 1 of 74

## Ameren Missouri (PQAO - 1440)

Labadie, N	orth								AQ	S Site Nu	mber29 <b>-</b> 18	3-9004
~150 ft. north	of Terry Rd	and ~200	ft. Kii	ngfish	er Ct, A	August	a, MO	63332				
Latitude:	38.59557	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.82864	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft):  Pollutant	816  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Sulfur Dioxide Max Avg	k 5-min 42406	Industrial	1		1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
	orthwest	12 magnetha	inton	aatian	i4la (	Cabbase	ralessura l	Dood	AQ	S Site Nu	mber <b>29-1</b> 8	3-9002
Rt. 94, Augus	38.5818	2 near the AQCR:	o70		เ W1เก ร politan S		sourg 1	Koau				
Lannaue.  Longitude:	-90.865528	MSA:	7040		ouis, MO-							
Elevation (ft):  Pollutant		AQS Monitor Type	AQS POC	Кеер	AQS		State- Obj	AQS Unit- Code	_	AQS Method Code	AQS Method	AQS Monitor Objective
Outdoor Temperat	ure 62101	<b>I</b> ndustrial	2		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (10m Probe Height)

Thursday, June 01, 2017 Page 2 of 74

Outdoor Temperature Diff	62106	Industrial	1	1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other (10m - 2m Probe Heights)
Sulfur Dioxide	42401	Industrial	1	1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Sulfur Dioxide Max 5-min Avg	42406	Industrial	1	1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
WD - Sigma Theta (Vertical)	61107	Industrial	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
Wind Direction - Resultant	61104	Industrial	1	1	N/A	MET	014	deg	020	Vector Summation	Other (10m Tower)
Wind Direction - Scalar	61102	Industrial	1	1	N/A	MET	014	deg	063	Climatronics	Other (10m Tower)
Wind Speed - Resultant	61103	Industrial	1	1	N/A	MET	011	m/s	020	Vector Summation	Other (10m Tower)
Wind Speed - Scalar	61101	Industrial	1	1	N/A	MET	011	m/s	063	Climatronics	Other (10m Tower)
Wind Speed - Vertical	61109	Industrial	1	1	N/A	MET	011	m/s	020	Electronic Averaging	Other (10m Tower)

Thursday, June 01, 2017 Page 3 of 74

WS - Sigma Theta (Vertical)	61110	Industrial	1		1	N/A	MET	011	m/s	020	Arithmetic Standard Deviation	Other (10m Tower)
Labadie, So	outhwest								AQ	S Site Nu	mber <b>29-07</b> 1	-9002
870 Albertina	Lane, Labao	die, MO 63	3055									
Latitude:	38.52825	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.86301	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft): Pollutant	630  AQS  Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	_	AQS Method Code	AQS Method	AQS Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	COM	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Sulfur Dioxide Max Avg	5-min 42406	Industrial	1		1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
	illey Site	d Labadia	MO	62055	-				AQ	S Site Nu	mber <b>29-071</b>	-9001
2901 Labadie Latitude:		AQCR:	070		, politan S	t. Louis						
	38.572522	-	7040		uis, MO-							
Longitude: Elevation (ft): Pollutant	-90.796911 525 AQS Code	MSA:  AQS  Monitor  Type	AQS	Кеер	AQS		State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Barometric Pressu	re 64101	Industrial	1		1	N/A	MET	016	Millbars	015	Instrumental- Barometric Press Transducer	Other
Outdoor Temperatu	ıre 62101	Industrial	2		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (10m Probe Height)

Thursday, June 01, 2017 Page 4 of 74

Outdoor Temperature	62101	Industrial	3	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (2m Probe Height)
Outdoor Temperature Diff	62106	Industrial	1	1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other (10m - 2m Probe Heights)
Precipitation	65102	Industrial	1	1	N/A	MET	021	inches	014	Heated Tipping Bucket	Other
Relative Humidity	62201	Industrial	1	1	N/A	MET	019	%humidity	061	Met One 083D	Other
Solar Radiation	63301	Industrial	1	1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Sulfur Dioxide	42401	Industrial	1	1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Sulfur Dioxide Max 5-min Avg	42406	Industrial	1	1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
WD - Sigma Theta (Vertical)	61107	Industrial	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
Wind Direction - Resultant	61104	Industrial	1	1	N/A	MET	014	deg	020	Vector Summation	Other (10m Tower)

Thursday, June 01, 2017 Page 5 of 74

Wind Direction - Scalar	61102	Industrial	1		1	N/A	MET	014	deg	063	Climatronics	Other (10m Tower)
Wind Speed - Resultant	61103	Industrial	1		1	N/A	MET	011	m/s	020	Vector Summation	Other (10m Tower)
Wind Speed - Scalar	61101	Industrial	1		1	N/A	MET	011	m/s	063	Climatronics	Other (10m Tower)
Wind Speed - Vertical	61109	Industrial	1		1	N/A	MET	011	m/s	020	Electronic Averaging	Other (10m Tower)
WS - Sigma Theta (Vertical)	61110	Industrial	1		1	N/A	MET	011	m/s	020	Arithmetic Standard Deviation	Other (10m Tower)
Rush Island, F	Tults-S	ite, IL							AQ	S Site Nu	mber17-133	-9001
Off Ivy Road, Ful	ts, IL 62	244										
Latitude: 38.1	5908	AQCR:	138									
Longitude: -90.		1120111	100	SE M	issouri							
	22728	MSA:	0000		issouri a MSA							
Elevation (ft): 446  Pollutant			0000  AQS	Not in		AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code		AQS Monitor Objective
Lievation (jt).	AQS	MSA:  AQS  Monitor	0000  AQS	Not in	a MSA			Unit-		Method	AQS	Monitor Objective Other

Thursday, June 01, 2017 Page 6 of 74

Outdoor Temperature	62101	Industrial	3	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (2m Probe Height)
Outdoor Temperature Diff	62106	Industrial	1	1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other (10m - 2m Probe Heights)
Precipitation	65102	Industrial	1	1	N/A	MET	021	inches	014	Heated Tipping Bucket	Other
Relative Humidity	62201	Industrial	1	1	N/A	MET	019	%humidity	061	Met One 083D	Other
Solar Radiation	63301	Industrial	1	1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Sulfur Dioxide	42401	Industrial	1	1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Sulfur Dioxide Max 5-min Avg	42406	Industrial	1	1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
WD - Sigma Theta (Horizontal)	61106	Industrial	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
WD - Sigma Theta (Vertical)	61107	Industrial	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)

Thursday, June 01, 2017 Page 7 of 74

Wind Direction - Resultant	61104	Industrial	1		1	N/A	MET	014	deg	020	Vector Summation	Other (10m Tower)
Wind Direction - Scalar	61102	Industrial	1		1	N/A	MET	014	deg	063	Climatronics	Other (10m
									Ü			Tower)
Wind Speed - Resultant	61103	<b>I</b> ndustrial	1		1	N/A	MET	011	m/s	020	Vector Summation	Other (10m Tower)
Wind Speed - Scalar	61101	Industrial	1		1	N/A	MET	011	m/s	063	Climatronics	Other (10m
												Tower)
Wind Speed - Vertical	61109	Industrial	1		1	N/A	MET	011	m/s	020	Electronic Averaging	Other (10m Tower)
WS - Sigma Theta	61110	Industrial	1		1	N/A	MET	011	m/s	020	Arithmetic	Other (10m
(Vertical)											Standard Deviation	Tower)
Rush Island, Ja	hnso	n Tall T	owei	•					AQ	S Site Nu	mber29 <b>-</b> 099	9-9008
600 Johnson Rd., F	estus, l	MO 63028										
<b>Latitude:</b> 38.11	999	AQCR:	070	Metro	politan S	St. Louis						
Longitude: -90.28	3214	MSA:	7040	St. Lo	ouis, MO-	·IL						
Elevation (ft): 656		AQS						400		40C		40C
	AQS	Monitor	AQS		AQS		State-	AQS Unit-		AQS Method		AQS Monitor
Pollutant	Code	Type	POC	Keep	Freq	Scale	Obj	Code	Unit	Code	Method	<b>Objective</b>
Outdoor Temperature	62101	Industrial	2		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (62.5m Probe Height)

Thursday, June 01, 2017 Page 8 of 74

Outdoor Temperature	62101	Industrial	3	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (132.5m Probe Height)
Outdoor Temperature Diff	62106	Industrial	1	1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other (132.5m- 62.5m Probe Heights)
WD - Sigma Theta (Horizontal)	61106	Industrial	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)
WD - Sigma Theta (Horizontal)	61106	Industrial	2	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
WD - Sigma Theta (Horizontal)	61106	Industrial	3	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
WD - Sigma Theta (Horizontal)	61106	Industrial	4	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
WD - Sigma Theta (Horizontal)	61106	Industrial	5	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
WD - Sigma Theta (Horizontal)	61106	Industrial	6	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
WD - Sigma Theta (Vertical)	61107	Industrial	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)
WD - Sigma Theta (Vertical)	61107	Industrial	2	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)

Thursday, June 01, 2017 Page 9 of 74

WD - Sigma Theta (Vertical)	61107	Industrial	3	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)
WD - Sigma Theta (Vertical)	61107	Industrial	4	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)
WD - Sigma Theta (Vertical)	61107	Industrial	5	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)
WD - Sigma Theta (Vertical)	61107	Industrial	6	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)
Wind Direction - Resultant	t 61104	Industrial	1	1	N/A	MET	014	deg	020	Vector Summation	Other (132.5m Probe Height)
Wind Direction - Resultant	t 61104	Industrial	2	1	N/A	MET	014	deg	020	Vector Summation	Other (62.5m Probe Height)
Wind Direction - Resultant	t 61104	Industrial	3	1	N/A	MET	014	deg	020	Vector Summation	Other (62.5m Probe Height)
Wind Direction - Scalar	61102	Industrial	1	1	N/A	MET	014	deg	063	Climatronics	Other (132.5m Probe Height)
Wind Direction - Scalar	61102	Industrial	2	1	N/A	MET	014	deg	063	Climatronics	Other (62.5m Probe Height)
Wind Direction - Scalar	61102	Industrial	3	1	N/A	MET	014	deg	063	Climatronics	Other (62.5m Probe Height)

Thursday, June 01, 2017 Page 10 of 74

Wind Speed - Resultant	61103	<b>I</b> ndustrial	1	1	N/A	MET	011	m/s	020	Vector Summation	Other (132.5m Probe Height)
Wind Speed - Resultant	61103	Industrial	2	1	N/A	MET	011	m/s	020	Vector Summation	Other (62.5m Probe Height)
Wind Speed - Resultant	61103	Industrial	3	1	N/A	MET	011	m/s	020	Vector Summation	Other (62.5m Probe Height)
Wind Speed - Scalar	61101	Industrial	1	1	N/A	MET	011	m/s	063	Climatronics	Other (132.5m Probe Height)
Wind Speed - Scalar	61101	Industrial	2	1	N/A	MET	011	m/s	063	Climatronics	Other (62.5m Probe Height)
Wind Speed - Scalar	61101	Industrial	3	1	N/A	MET	011	m/s	063	Climatronics	Other (62.5m Probe Height)
Wind Speed - Vertical	61109	Industrial	1	1	N/A	MET	011	m/s	020	Electronic Averaging	Other (132.5m Probe Height)
Wind Speed - Vertical	61109	Industrial	2	1	N/A	MET	011	m/s	020	Electronic Averaging	Other (62.5m Probe Height)
Wind Speed - Vertical	61109	Industrial	3	1	N/A	MET	011	m/s	020	Electronic Averaging	Other (62.5m Probe Height)
WS - Sigma Theta (Vertical)	61110	Industrial	1	1	N/A	MET	011	m/s	020	Arithmetic Standard Deviation	Other (132.5m Probe Height)

Thursday, June 01, 2017 Page 11 of 74

WS - Sigma Theta (Vertical)	61110	Industrial	2		1	N/A	MET	011	m/s	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
WS - Sigma Theta (Vertical)	61110	Industrial	3		1	N/A	MET	011	m/s	020	Arithmetic Standard Deviation	Other (62.5m Probe Height)
Rush Island	l, Natche.	Z							ΑQ	QS Site Nu	mber <b>29-09</b>	9-9009
917 Natchez	Trace Drive,	Bloomsda	le, M	O 636	27							
Latitude:	38.10525	AQCR:	070	Metro	politan S	St. Louis						
Longitude:	-90.29842	MSA:	7040	St. Lo	ouis, MO	-IL						
Elevation (ft):	505	AQS						405		405		40C
Pollutant	AQS Code	Monitor Type	AQS POC	Keep	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	COM	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Sulfur Dioxide Max Avg	c 5-min 42406	Industrial	1		1	MID	COM	008	ppb	100	Ultra-violet Fluorescence	Source Oriented
Ruch Island	d. Weaver	· Road &	2. <b>L</b> I;	ahw	a	4			40	DS Site Nu	mber29 <b>-</b> 09	9-9007
802 Weaver F				211111	4 V 212				719	ob Bue I w	mber 20 00	0 0001
Latitude:	38.144972	AQCR:	070	Metro	politan S	St. Louis						
Longitude:	-90.304783	MSA:	7040	St. Lo	ouis, MO	-IL						
Elevation (ft):	502	AQS						400		400		400
Pollutant	AQS Code	Monitor Type	AQS POC	Keep	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code		AQS Method Code	AQS Method	AQS Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	СОМ	008	ppb	100	Ultra-violet Fluorescence	Source Oriented

Thursday, June 01, 2017 Page 12 of 74

Thursday, June 01, 2017 Page 13 of 74

## Doe Run Buick (PQAO - 1288)

County Roc	ad 75								AQ	S Site Nu	mber29-093	3-9010
98 Iron Count	y Road, Bix	by, MO 65	3439									
Latitude:	37.64876	AQCR:	138	SE M	issouri							
Longitude:	-91.14980	MSA:	0000	Not in	a MSA							
Elevation (ft):  Pollutant	1365 <i>AQS Code</i>	AQS Monitor Type	AQS POC	Кеер	AQS Frea	AQS Scale	State-	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
1 ounum	Coue	-JF -	100	псер	Treq	Scure	Obj	Coue	Onn	Coue	Memou	Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	COM	008	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide Max Avg	: 5-min 42406	Industrial	1		1	MID	COM	008	ppb	060	Pulsed Fluorescent	Source Oriented
Doe Run Bi	uick - Bui	ick NE (	Pbs	amp	ling t	o cho	ınge ı	to 1 in	1) AQ	S Site Nu	mber <b>29-09</b> 3	3-9008
346 Power La	ne, Bixby W	est, MO 6	5439									
Latitude:	37.65214	AQCR:	138	SE M	issouri							
Longitude:	-91.11689	MSA:	0000	Not in	a MSA							
Elevation (ft):  Pollutant	1423 <i>AQS</i> <i>Code</i>	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC FI	RM/FEM 14129	Industrial	1		1/6	MID	СОМ	105	ug/m^3-L0	C 192	Inductive Coupled Plasma Spectrometry	Source Oriented

Thursday, June 01, 2017 Page 14 of 74

Doe Run Bi	uick - Noi	rth #5 (1	VON	(-A)					A <b>Q</b> .	S Site Nu	mber <b>29-0</b> 93	3-0021
Doe Run Buic	ck - North#5	, Buick, M	O 654	139								
Latitude:	37.65178	AQCR:	138	SE M	issouri							
Longitude:	-91.13094	MSA:	0000	Not in	a MSA							
Elevation (ft):  Pollutant	1443  AQS  Code	AQS Monitor Type	AQS POC	Keep	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	_	AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC Ff	RM/FEM 14129	Industrial	1		1/6	MID	SIP	105	ug/m^3-L(	C 192	Inductive Coupled Plasma Spectrometry	Source Oriented
Doe Run Bi	uick - Soi	ıth #1 (1	VON	(-A)					AQ	S Site Nu	mber29-093	3-0016
Doe Run Buic			O 654	139								
Latitude:	37.62400	AQCR:	138	SE M	issouri							
Longitude:	-91.12827	MSA:	0000	Not in	a MSA							
Elevation (ft):  Pollutant	1502 <i>AQS</i> <i>Code</i>	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC FI	RM/FEM 14129	Industrial	1		1/6	MID	SIP	105	ug/m^3-L0	C 192	Inductive Coupled Plasma Spectrometry	Source Oriented
Lead (TSP) - LC FI	RM/FEM 14129	Industrial	2	✓	1/6	MID	SIP	105	ug/m^3-L0	C 192	Inductive Coupled Plasma Spectrometry	Quality Assurance (Collocation)
Hwy 32 No	rtheast								AQ	S Site Nu	mber <b>29-0</b> 93	<b>3-9009</b>
1582 Highway	y 32, Bixby,	MO 6543	9									
Latitude:	37.65319	AQCR:	138	SE M	issouri							
Longitude:	-91.12795	MSA:	0000	Not in	a MSA							
Elevation (ft):  Pollutant	1384  AQS  Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective

Thursday, June 01, 2017 Page 15 of 74

Sulfur Dioxide	42401	<b>I</b> ndustrial	1		1	MID	СОМ	800	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide Max 5 Avg	5-min 42406	Industrial	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
West Entrar	ice								AQ	QS Site Nu	mber29 <b>-</b> 09	3-9011
18594 Hwy KI	K, Boss, M	O 65440										
Latitude:	37.63211	AQCR:	138	SE M	issouri							
Longitude:	-91.13565	MSA:	0000	Not in	a MSA							
Elevation (ft):	1463	AQS						AQS		AQS		AQS
Pollutant	AQS Code	Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	Unit- Code		Method Code	AQS Method	Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide Max 5 Avg	5-min 42406	Industrial	1		1	MID	СОМ	800	ppb	060	Pulsed Fluorescent	Source Oriented

Thursday, June 01, 2017 Page 16 of 74

## Doe Run Glover (PQAO - 1289)

<u>Doe Run G</u>	lover - Bi	ig Creek	#5	(NOI	V-A				AQ.	S Site Nu	<i>mber</i> 29-093	3-0029
Doe Run Glo	ver - Big Cre	ek #5, Hw	y 49 (	Glover	;, MO	65439						
Latitude:	37.47211	AQCR:	138	SE M	issouri							
Longitude:	-90.68919	MSA:	0000	Not in	a MSA							
Elevation (ft):	836	AQS						400		40C		405
Pollutant	AQS Code	Monitor Type	AQS POC	Keep	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC F	RM/FEM 14129	Industrial	1		1/6	MID	SIP	105	ug/m^3-L0	C 189	Inter-Mountain Lab, Inc Mass Spectra ICAP	Source Oriented
Doe Run G	lover - Po	ost Offic	e #2	(NC	N-A	)			AQ.	S Site Nu	mber29-093	3-0027
Dog Bun Cla	D + 0.0		4.0									
Doe Kull Glo	ver - Post Of	fice #2, H	wy 49	Glove	er, MO	6543	9					
Latitude:	ver - Post Of 37.48532	fice #2, Hv <i>AQCR:</i>	wy 49 138		er, MC issouri	) 6543!	9					
		•	•	SE M		) 6543 <u>!</u>	9					
Latitude:	37.48532 -90.68991	AQCR:	138 0000 <i>AQS</i>	SE M	issouri n a MSA		State-	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Latitude: Longitude: Elevation (ft):	37.48532 -90.68991 831 <i>AQS</i> <i>Code</i>	AQCR: MSA: AQS Monitor	138 0000 <i>AQS</i>	SE M	issouri n a MSA	AQS	State-	Unit-	_	Method Code	_	Monitor

Thursday, June 01, 2017 Page 17 of 74

## Doe Run Herculaneum (PQAO - 1290)

Herculaneu	ım, Churc	ch Stree.	t (NO	ON-A	1)				AQS	Site Nu	mber29-099	-0024
951 Church St	t., Herculane	eum, MO 6	3048									
Latitude:	38.258667	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.380889	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft):  Pollutant	463  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code		AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC FF	RM/FEM 14129	Industrial	1		1/6	NBR	СОМ	105	ug/m^3-LC	192	Inductive Coupled Plasma Spectrometry	Source Oriented
Lead (TSP) - LC FF	RM/FEM 14129	Industrial	2		1/6	NBR	СОМ	105	ug/m^3-LC	192	Inductive Coupled Plasma Spectrometry	Quality Assurance (Collocation)
Herculaneu 360 Short Stre	ini, Civ, I	Hall (Ma							AQS	S Site Nu	mber <b>29-0</b> 99	-0020
Herculanes 360 Short Stre	ini, Civ, I	neum, MO,		8	politan S	t. Louis			AQS	S Site Nu	mber <b>29-09</b> 9	-0020
360 Short Stre	eet, Hercular		, 6304	8 Metro					AQS	S Site Nu	mber <b>29-0</b> 99	-0020
360 Short Stre	eet, Herculan 38.263394	neum, MO,	, 6304 070 7040	8 Metro	politan S uis, MO-	IL	State- Obj	AQS Unit- Code		S Site Nu AQS Method Code		AQS Monitor Objective
360 Short Stre Latitude: Longitude: Elevation (ft):	eet, Herculan 38.263394 -90.379667 468 <i>AQS</i> <i>Code</i>	neum, MO, AQCR: MSA: AQS Monitor	, 6304 070 7040	8 Metro St. Lo	politan S uis, MO- <i>AQS</i>	AQS		Unit-	AQS	AQS Method Code	AQS	AQS Monitor

Thursday, June 01, 2017 Page 18 of 74

Herculaneu	ım, Dunk	lin High	Sch	ool					AQS	Site Nu	mber <b>29-09</b> 9	-9002
1 Black Cat D	r., Herculan	eum, MO,	63048	8								
Latitude:	38.26703	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.37875	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft):  Pollutant	445  AQS  Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC FF	RM/FEM 14129	Industrial	1		1/3	NBR	СОМ	105	ug/m^3-LC	192	Inductive Coupled Plasma Spectrometry	Source Oriented & Population Exposure
Herculaneu	ım, North	Cross							AQS	Site Nu	mber <b>29-09</b> 9	-0023
North Cross, I	Herculaneun	n, MO 630	48									
Latitude:	38.263378	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.381122	MSA:	7040	St. Lc	ouis, MO-	IL						
Elevation (ft):  Pollutant	463  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code		AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC FF	RM/FEM 14129	<b>I</b> ndustrial	1		1/1	NBR	СОМ	105	ug/m^3-LC	C 192	Inductive Coupled Plasma Spectrometry	Source Oriented & Population Exposure
Herculaneu	ım, Shern	ıan							AQS	Site Nu	mber <b>29-</b> 099	-9004
460 Sherman	St., Hercular	neum, MO	, 6304	18								
Latitude:	38.27176	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.37648	MSA:	7040	St. Lo	ouis, MO-	IL						
Elevation (ft):  Pollutant	462  AQS  Code	AQS Monitor Type	AQS	Кеер	AQS Freq	AQS Scale	State-	AQS Unit- Code		AQS Method Code	AQS Method	AQS Monitor Objective

Page 19 of 74 Thursday, June 01, 2017

Thursday, June 01, 2017 Page 20 of 74

## Environmental Services Program (ESP) [PQAO - 0588]

Alba 💮 💮									AQS	S Site Nu	mber29 <b>-</b> 097	7-0004
20400 Millwo	od Rd., Alba	a, MO 647	755									
Latitude:	37.2385	AQCR:	139	SW M	lissouri							
Longitude:	-94.42468	MSA:	3710	Joplin	, MO							
Elevation (ft):  Pollutant	965  AQS  Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	_	AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperature	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Max Ozone Concentration & Population Exposure
Ozone	44201	SLAMS	2		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	-
Arnold Wes	W A TIAT O			bmit	ting .	AOS (	data		AQ.	S Site Nu	mber <b>29-09</b> 9	9-0019
1709 Lonedell <i>Latitude:</i>	38.44862	ı, MO 030 <i>AQCR:</i>	070	Metro	politan S	St. Louis						
	-90 <b>.</b> 3958	MSA:	7040		uis, MO-							
Longitude: Elevation (ft):  Pollutant	639  AQS Code	AQS Monitor Type	AQS	Кеер	AQS		State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Ammonium Ion PM	2.5 LC 88301	SLAMS	6		1/6	NBR	RES	105	ug/m^3-L(	C 812	Met One SASS Nylon	Population Exposure (UC-Davis)

Thursday, June 01, 2017 Page 21 of 74

Barometric Pressure	64101	SPM	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
OP CSN_Rev Undj PM2.5 LC TOR	88378	SLAMS	6		1/6	NBR	RES	105	ug/m^3-LC	842	URG 3000N w/Pall Quartz filter & Cyclone Inlet	Population Exposure (UC-Davis)
Outdoor Temperature	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Ozone	44201	SLAMS	1		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone	44201	SLAMS	2		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	-
PM10 - LC/FEM/NonFEM	85101	SPM	5		1	NBR	COM	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	NBR	COM	105	ug/m^3-LC	208	FMDS- Gravimetric 1405 DF	Population - Exposure
PM10 - STP FRM/FEM	81102	SLAMS	3		1	NBR	COM	001	ug/m^3	079	R&P SA246B TEOM	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	NBR	COM	001	ug/m^3	208	FMDS- Gravimetric 1405 DF	Population - Exposure

Thursday, June 01, 2017 Page 22 of 74

PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	COM	105	ug/m^3-LC	182	FMDS- Gravimetric 1405 DF	Population - Exposure
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PMCoarse - LC FRM/FEN	И 86101	SLAMS	8		1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405 DF	Population - Exposure
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Wind Direction - Resultar	it 61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (10m Tower)
Wind Speed - Resultant	61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (10m Tower)
Blair Street: P.	M10-F	EM no	t sub	mitti	ing A	OS d	ata		AQS	S Site Nu	mber29 <b>-</b> 510	-0085
3247 Blair Street,	St. Louis	s, MO 63	107									
Latitude: 38.69	5638	AQCR:	070	Metro	politan S	t. Louis						
Longitude: -90.1	9825	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft): 492  Pollutant	AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS	AQS Method Code		AQS Monitor Objective

Thursday, June 01, 2017 Page 23 of 74

Ammonium Ion PM2.5 LC	88301	SLAMS	6	1/3	NBR	RES	105	ug/m^3-LC	812	Met One SASS Nylon	Highest Concentration (UC-Davis)
Barometric Pressure	64101	SLAMS	1	1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Black Carbon PM2.5 LC	88313	SLAMS	1	1	NBR	RES	105	ug/m^3-LC	894	Magee Scientific TAPI M633 Aethalometer	Population Exposure
Carbon Monoxide	42101	NCORE	1	1	NBR	СОМ	007	ppm	055	Gas Filter Corr Thermo Electron 48C-TL	Population Exposure
Indoor Temperature	62107	SLAMS	1	1	N/A	MET	017	deg C	013	Electronic Averaging	Other (Large Shelter)
Indoor Temperature	62107	SLAMS	2	1	N/A	MET	017	deg C	013	Electronic Averaging	Other (Small Shelter)
Lead PM10 LC - FRM/FEI	M 85129	SLAMS	6	1/6	NBR	RES	108	ng/m^3-LC	907	R&P Partisol 2025 Teflon	Population Exposure (ERG)
Lead PM10 LC - FRM/FEI	M 85129	SLAMS	7	1/6	NBR	RES	108	ng/m^3-LC	907	R&P Partisol 2025 Teflon	Population Exposure (ERG)
Nitric Oxide	42601	NCORE	1	1	NBR	СОМ	008	ppb	699	Teledyne API 200 EU/501	Population Exposure
Nitric Oxide	42601	SPM	2	1	NBR	СОМ	008	ppb	200	Teledyne API T200UP Photolytic	Population Exposure

Thursday, June 01, 2017 Page 24 of 74

Nitrogen Dioxide	42602	SPM	2	1	NBR	COM	008	ppb	200	Teledyne API T200UP Photolytic	Population Exposure
OC CSN Unadj PM2.5 LC TOT	88305	SLAMS	1	1	NBR	RES	105	ug/m^3-LC	867	Sunset Labs	Population Exposure
OP CSN_Rev Undj PM2.5 LC TOR	88378	SLAMS	6	1/3	NBR	RES	105	ug/m^3-LC	842	URG 3000N w/Pall Quartz filter & Cyclone Inlet	Highest Concentration (UC-Davis)
Optical EC PM2.5 LC TOT	88316	SLAMS	1	1	NBR	RES	105	ug/m^3-LC	895	Sunset Lab	Population Exposure
Outdoor Temperature	62101	NCORE	1	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Oxides of Nitrogen	42603	SPM	2	1	NBR	COM	008	ppb	200	Teledyne API T200UP Photolytic	Population Exposure
Ozone	44201	NCORE	1	1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone	44201	NCORE	2	1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	-
PM10 - LC/FEM/NonFEM	85101	SLAMS	1	1/3	NBR	СОМ	105	ug/m^3-LC	127	Lo-Vol R&P 2025 Sequential	Population Exposure

Thursday, June 01, 2017 Page 25 of 74

PM10 - LC/FEM/NonFEM	85101	SLAMS	2		1/6	NBR	COM	105	ug/m^3-LC	127	Lo-Vol R&P 2025 Sequential	Quality Assurance (Collocation)
PM10 - LC/FEM/NonFEM	85101	SLAMS	5		1	NBR	СОМ	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	NBR	СОМ	105	ug/m^3-LC	208	FMDS- Gravimetric 1405- DF	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	1		1/3	NBR	COM	001	ug/m^3	127	Lo-Vol R&P 2025 Sequential	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	2		1/6	NBR	COM	001	ug/m^3	127	Lo-Vol R&P 2025 Sequential	Quality Assurance (Collocation)
PM10 - STP FRM/FEM	81102	SLAMS	8	✓	1	NBR	COM	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Population Exposure
PM2.5 - LC FRM/FEM	88101	NCORE	2		1/3	NBR	COM	105	ug/m^3-LC	145	R&P 2025 Sequential w/VSCC	Quality Assurance (Collocation)
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	COM	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Population Exposure
PM2.5 Tot Atmospheric	88500	SLAMS	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM2.5 Volatile Channel	88503	SLAMS	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure

Thursday, June 01, 2017 Page 26 of 74

PMCoarse - LC FRM/FEN	1 86101	SLAMS	1	1/3	NBR	СОМ	105	ug/m^3-LC	176	Thermo 2025 Sequential PM10 PM2.5	Population - Exposure
PMCoarse - LC FRM/FEM	1 86101	SLAMS	8	1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405 DF	Population - Exposure
Reactive Oxides of N (NOY)	42600	NCORE	1	1	NBR	СОМ	008	ppb	699	Teledyne API 200 EU/501	Population Exposure
Relative Humidity	62201	NCORE	1	1	N/A	MET	019	%humidity	014	Instrumental- Hygromer C94 Probe	Other
Solar Radiation	63301	SLAMS	1	1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Sulfur Dioxide	42401	NCORE	1	1	NBR	СОМ	008	ppb	600	Ultraviolet Fluorenscence API 100 EU	Population Exposure
Sulfur Dioxide Max 5-min Avg	42406	NCORE	1	1	NBR	СОМ	008	ppb	600	Ultraviolet Fluorenscence API 100 EU	Population Exposure
Total Carbon PM2.5 LC TOT	88312	SLAMS	1	1	NBR	RES	105	ug/m^3-LC	867	Sunset Labs	Population Exposure
UV Carbon PM2.5 LC	88314	SLAMS	1	1	NBR	RES	105	ug/m^3-LC	894	Magee Scientific TAPI M633 Aethalometer	Population Exposure

Thursday, June 01, 2017 Page 27 of 74

WD - Sigma Theta (Horizontal)	61106	SPM	1		1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
Wind Direction - Resultan	t 61104	NCORE	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Wind Speed - Resultant	61103	NCORE	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Blue Ridge, I-7	0: PN	410-FE.	M no	ot sul	bmitt	ing A	OS de	ata	AQS	S Site Nu	mber29 <b>-</b> 095	-0042
4018 Harvard Lane	e, Kansa	as City, M	O 641	33								
Latitude: 39.04	7911	AQCR:	094	Metro	politan K	ansas Ci	ty					
Longitude: -94.4	50513	MSA:	3760	Kansa	as City, N	/IO-KS						
Elevation (ft): 960		AQS						405		105		405
	AQS	Monitor	AQS		AQS	AQS	State-	AQS Unit-		AQS Method		AQS Monitor
Pollutant						_					_	
1 00000000	Code	Type	POC	Keep	Freq	Scale	Obj	Code		Code	_	<b>Objective</b>
Barometric Pressure	<b>Code</b> 64101	<i>Type</i> SPM	<b>POC</b>	Кеер	<b>Freq</b> 1	Scale N/A	<i>Obj</i> MET				_	
				П	•			Code	Unit	<b>Code</b> 014	Method  Instrumental-Barometric	Objective Other
Barometric Pressure	64101	SPM	1		1	N/A	MET	<b>Code</b> 059	Wnit mm (Hg)	<b>Code</b> 014	Method  Instrumental- Barometric Sensor  Magee Scientific TAPI M633	Other  Source Oriented

Thursday, June 01, 2017 Page 28 of 74

Nitric Oxide	42601	SPM	1		1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	n Source Oriented
Nitrogen Dioxide	42602	SLAMS	1		1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	n Source Oriented
Outdoor Temperature	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Outdoor Temperature	62101	SPM	2		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (10m Probe Height)
Outdoor Temperature	62101	SPM	3		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (2m Probe Height)
Outdoor Temperature Diff	62106	SPM	1		1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other
Oxides of Nitrogen	42603	SPM	1		1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	n Source Oriented
PM10 - LC/FEM/NonFEM	85101	SPM	5		1	MIC	СОМ	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Source - Oriented
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	MIC	COM	105	ug/m^3-LC	208	FMDS- Gravimetric 1405 DF	Source - Oriented
PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	MIC	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405 DF	Source - Oriented

Thursday, June 01, 2017 Page 29 of 74

PM2.5 - LC FRM/FEM	88101	SLAMS	4	1	MIC	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Source Oriented
PM2.5 Tot Atmospheric	88500	SPM	1	1	MIC	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Source Oriented
PM2.5 Volatile Channel	88503	SPM	1	1	MIC	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Source Oriented
PMCoarse - LC FRM/FEM	86101	SLAMS	8	1	MIC	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405- DF	Source Oriented
Precipitation	65102	SPM	1	1	N/A	MET	021	inches	014	Heated Tipping Bucket	Other
Relative Humidity	62201	SPM	1	1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Solar Radiation	63301	SPM	1	1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
UV Carbon PM2.5 LC	88314	SPM	1	1	MIC	сом	105	ug/m^3-LC	894	Magee Scientific TAPI M633 Aethalometer	Source Oriented
WD - Sigma Theta (Horizontal)	61106	SPM	1	1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)

Thursday, June 01, 2017 Page 30 of 74

Wind Direction - Resulta	ant 61104	SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Wind Speed - Resultant	61103	SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Bonne Terre									AQ	S Site Nu	mber29-186	-0005
15797 Highway D	), Bonne	Terre, Mo	O 6362	28								
Latitude: 37.9	90084	AQCR:	138	SE M	issouri							
Longitude: -90.	42388	MSA:	0000	Not in	a MSA							
Elevation (ft): 840  Pollutant	AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obi	AQS Unit- Code	AQS Unit	AQS Method Code	AQS	AQS Monitor Objective
			100		2709	201110		Couc		Couc	1,201100	<u>oojeeure</u>
Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	REG	СОМ	007	ppm	047	Ultraviolet Photometric	Regional Transport
Ozone	44201	SLAMS	2		1	REG	СОМ	007	ppm	047	Ultraviolet Photometric	-
Solar Radiation	63301	SPM	1		1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Wind Direction - Resulta	ant 61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)

Thursday, June 01, 2017 Page 31 of 74

St. Louis, 3.65643 0.18977	AQCR:	2 070	N / = 4 · · ·								
0.18977	_	070	N / - +								
	MC 4.		ivietro	politan S	t. Louis						
29	MSA:	7040	St. Lo	uis, MO-	IL						
AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq			AQS Unit- Code	AQS Unit	AQS Method Code	AQS	AQS Monitor Objective
64101	SPM	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
EM 85101	SPM	5		1	MID	СОМ	105	ug/m^3-LC	C 790	FDMS- Gravimetric 1405- DF	Source - Oriented
EM 85101	SLAMS	8	<b>V</b>	1	MID	COM	105	ug/m^3-L0	208	FMDS- Gravimetric 1405- DF	Source - Oriented
/I 81102	SLAMS	3		1	MID	СОМ	001	ug/m^3	079	R&P SA246B TEOM	Source Oriented
	64101 62107 62101 EM 85101	AQS Code         Monitor Type           64101         SPM           62107         SPM           62101         SPM           EM         85101         SPM           EM         85101         SLAMS	AQS Code         Monitor Type         AQS POC           64101         SPM         1           62107         SPM         1           62101         SPM         1           EM         85101         SPM         5           EM         85101         SLAMS         8	AQS Code       Monitor Type       AQS POC Keep         64101       SPM       1         62107       SPM       1         62101       SPM       1         EM       85101       SPM       5         EM       85101       SLAMS       8	AQS Code       Monitor Type       AQS POC Keep       AQS Freq         64101       SPM       1       1         62107       SPM       1       1         62101       SPM       1       1         EM       85101       SPM       5       □       1         EM       85101       SLAMS       8       ✓       1	AQS Code         Monitor Type         AQS POC Keep         AQS Freq Scale           64101         SPM         1         □         1         N/A           62107         SPM         1         □         1         N/A           62101         SPM         1         □         1         N/A           EM         85101         SPM         5         □         1         MID           EM         85101         SLAMS         8         ✓         1         MID	AQS Code         Monitor Type         AQS POC Keep         AQS Freq Freq Scale         AQS Obj           64101         SPM         1         □         1         N/A         MET           62107         SPM         1         □         1         N/A         MET           62101         SPM         1         □         1         N/A         MET           EM         85101         SPM         5         □         1         MID         COM           EM         85101         SLAMS         8         ✓         1         MID         COM	AQS Code         Monitor Type         AQS POC Keep         AQS Freq Freq Freq         AQS State Code         Unit-Code           64101         SPM         1         1         N/A         MET         059           62107         SPM         1         1         N/A         MET         017           62101         SPM         1         1         N/A         MET         017           EM         85101         SPM         5         □         1         MID         COM         105           EM         85101         SLAMS         8         ✓         1         MID         COM         105	AQS Code         Monitor Type         AQS POC Keep         AQS Scale Obj         Vinit Code Unit         AQS Code Unit           64101         SPM         1         1         N/A         MET         059         mm (Hg)           62107         SPM         1         1         N/A         MET         017         deg C           62101         SPM         1         1         N/A         MET         017         deg C           EM         85101         SPM         5         1         MID         COM         105         ug/m^3-LG           EM         85101         SLAMS         8         ✓         1         MID         COM         105         ug/m^3-LG	AQS Code         Monitor Type         AQS POC Keep         AQS Freq Freq         AQS Scale Obj Code         Unit Code         AQS Method Code           64101         SPM         1         □         1         N/A         MET         059         mm (Hg)         014           62107         SPM         1         □         1         N/A         MET         017         deg C         013           62101         SPM         1         □         1         N/A         MET         017         deg C         040           EM         85101         SPM         5         □         1         MID         COM         105         ug/m^3-LC         790           EM         85101         SLAMS         8         ☑         1         MID         COM         105         ug/m^3-LC         208	AQS Code         Monitor Type         AQS POC Keep         AQS Freq         Scale Obj         Unit Ocde         AQS Method Unit Ocde         AQS Method Method           64101         SPM         1         □         1         N/A         MET         0.59         mm (Hg)         0.14         Instrumental-Barometric Sensor           62107         SPM         1         □         1         N/A         MET         0.17         deg C         0.13         Electronic Averaging           62101         SPM         1         □         1         N/A         MET         0.17         deg C         0.40         Electronic Averaging           EM         85101         SPM         5         □         1         MID         COM         1.05         ug/m^3-LC         790         FDMS-Gravimetric 1405-DF           EM         85101         SLAMS         8         ✓         1         MID         COM         1.05         ug/m^3-LC         208         FMDS-Gravimetric 1405-DF           EM         85101         SLAMS         3         □         1         MID         COM         0.01         ug/m^3         0.79         R&P SA246B

Thursday, June 01, 2017 Page 32 of 74

PM10 - STP FRM/FEM	81102	SLAMS	8	✓	1	MID	COM	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Source Oriented
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	MID	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Source Oriented
PM2.5 Tot Atmospheric	88500	SPM	1		1	MID	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Source Oriented
PM2.5 Volatile Channel	88503	SPM	1		1	MID	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Source Oriented
PMCoarse - LC FRM/FEM	86101	SLAMS	8		1	MID	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405- DF	Source Oriented
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
WD - Sigma Theta (Horizontal)	61106	SPM	1		1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
Wind Direction - Resultant	61104	SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Wind Speed - Resultant	61103	SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)

Thursday, June 01, 2017 Page 33 of 74

Thursday, June 01, 2017 Page 34 of 74

Elevation (ft):  Pollutant		lQS ode	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale		AQS Unit- Code		AQS Method Code	AQS	AQS Monitor Objective
Longitude:	-94.317	02	MSA:	3710	Joplin	, MO							
Latitude:	37.1982	22	AQCR:	139		lissouri							
530 Juniper, C	arthag	ge, MC	64836										
Carthage										AQS	Site Nui	mber29-097	-0003
Wind Speed - Resu	ltant	61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (6 meters)
Wind Direction - Re	sultant	61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (6 meters)
Sulfur Dioxide Max Avg	5-min	42406	SPM	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide		42401	SPM	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
Lead (TSP) - LC FR	RM/FEM	14129	SLAMS	2		1/6	MID	СОМ	105	ug/m^3-LC	813	Inductively Coupled Plasma Mass Spectroscopy	Quality Assurance (Collocation)
Lead (TSP) - LC FR	RM/FEM	14129	SLAMS	1		1/6	MID	COM	105	ug/m^3-LC	813	Inductively Coupled Plasma Mass Spectroscopy	Source Oriented & Highest Concentration
Indoor Temperature	÷	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other

Thursday, June 01, 2017 Page 35 of 74

Indoor Temperature	6210	7 SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
PM10 - STP FRM/FI	EM 8110	2 SLAMS	3		1	MID	СОМ	001	ug/m^3	079	R&P SA246B TEOM	Source Oriented
PM10 - STP FRM/FI	EM 8110	2 SLAMS	4		1	MID	COM	001	ug/m^3	079	R&P SA246B TEOM	Quality Assurance (Collocation)
Wind Direction - Res	sultant 6110	4 SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (5.5 meters)
Wind Speed - Resul	tant 6110	3 SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (5.5 meters)
El Douado S	Cravita con	. DM10 1		11 O t	b	ittino	. 105	date	40	C Cita Nec	b20_030	_0001
El Dorado S					, , , , , , , , , , , , , , , , , , , ,		· AOS	S date	AQ.	S Site Nu	mber <b>29-039</b>	-0001
Highway 97 &		toad, El Doi	ado Sp	orings,	, MO 6		AOS	date	AQ.	S Site Nu	mber <b>29-039</b>	-0001
Highway 97 &				orings,	, , , , , , , , , , , , , , , , , , , ,		AOS	<u>date</u>	AQ.	S Site Nu	mber <b>29-039</b>	-0001
Highway 97 & Latitude:	Barnes F	toad, El Doi	ado Sp	orings, sw m	, MO 6		AOS	S date	AQ.	S Site Nu	mber <b>29-039</b>	-0001
Highway 97 & Latitude: Longitude:	Barnes F 37.70097	toad, El Doi <i>AQCR:</i>	rado S <sub>I</sub> 139  0000	orings, sw m	, MO 6 lissouri a MSA <i>AQS</i>	54744	State-	AQS	AQS Unit	S Site Nur AQS Method Code		-0001  AQS  Monitor  Objective
Highway 97 & Latitude: Longitude: Elevation (ft):	Barnes F 37.70097 -94.03474 965 <i>AQS</i> <i>Code</i>	Aoad, El Doi AQCR: MSA: AQS Monitor Type	rado S <sub>I</sub> 139  0000	orings, SW M Not in	, MO 6 lissouri a MSA <i>AQS</i>	54744  AQS	State-	AQS Unit-	AQS	AQS Method	AQS	AQS Monitor

Thursday, June 01, 2017 Page 36 of 74

Outdoor Temperature	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Ozone	44201	SLAMS	1		1	REG	СОМ	007	ppm	047	Ultraviolet Photometric	Regional Transport
Ozone	44201	SLAMS	2		1	REG	СОМ	007	ppm	047	Ultraviolet Photometric	-
PM10 - LC/FEM/NonFEM	85101	SPM	5		1	REG	СОМ	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Regional - Transport
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	REG	СОМ	105	ug/m^3-LC	208	FMDS- Gravimetric 1405 DF	Regional - Transport
PM10 - STP FRM/FEM	81102	SLAMS	8	✓	1	REG	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405 DF	Regional - Transport
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	REG	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405 DF	Regional - Transport
PM2.5 Tot Atmospheric	88500	SPM	1		1	REG	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Regional - Transport
PM2.5 Volatile Channel	88503	SPM	1		1	REG	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Regional - Transport
PMCoarse - LC FRM/FEM	1 86101	SLAMS	8		1	REG	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405 DF	Regional - Transport

Thursday, June 01, 2017 Page 37 of 74

Relative Humidity	62201	SPM	2		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Wind Direction - Result	ant 61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Wind Speed - Resultan	t 61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Farrar									AQS	Site Nu	mber29 <b>-</b> 157	-0001
County Rd. 342,	Farrar, M	IO 63746										
Latitude: 37.	70264	AQCR:	138	SE Mi	ssouri							
Longitude: -89	.698640	MSA:	0000	Not in	a MSA							
Elevation (ft): 497	7	400										
Pollutant	AQS Code	AQS Monitor Type	AQS POC	Кеер		AQS Scale	State- Obj	AQS Unit- Code	AQS	AQS Method Code	AQS	AQS Monitor Objective
		Monitor		<i>Keep</i> □				Unit-	AQS	Method	AQS	Monitor
Pollutant	Code	Monitor Type	POC		Freq 1	Scale	<i>Obj</i> MET	Unit- Code	AQS Unit	Method Code 013	AQS Method	Monitor Objective
Pollutant Indoor Temperature Ozone	62107 44201	Monitor Type  SPM  SLAMS	1 1		1 1	N/A NBR	<i>Obj</i> MET  COM	Unit- Code 017 007	AQS Unit	Method Code 013	AQS Method  Electronic Averaging  Ultraviolet Photometric	Monitor Objective  Other  Max Ozone Concentration & Extreme Downwind
Pollutant Indoor Temperature	62107 44201 44201	Monitor Type	<b>POC</b>		Freq 1	Scale N/A	<i>Obj</i> MET	Unit-Code 017	AQS Unit	Method Code 013	AQS Method  Electronic Averaging  Ultraviolet	Monitor Objective  Other  Max Ozone Concentration & Extreme Downwind

Thursday, June 01, 2017 Page 38 of 74

Wind Speed - Resu	ultant 61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Fellows La	ke								AQ	S Site Nu	mber <b>29-07</b> 7	<b>'-0042</b>
4208 E. Farm	Rd. 66, Spr	ingfield, M	1O 658	303								
Latitude:	37.319444	AQCR:	139	SW M	lissouri							
Longitude:	-93.204444	MSA:	7920	Spring	gfield, Mo	)						
Elevation (ft):	1346	400										
Pollutant	AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperatur	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	URB	СОМ	007	ppm	047	Ultraviolet Photometric	Max Ozone Concentration & Population Exposure
Ozone	44201	SLAMS	2		1	URB	СОМ	007	ppm	047	Ultraviolet Photometric	-
Finger Lak	es								AQ	S Site Nu	mber <b>29-0</b> 19	-0011
1505 E. Peabo	ody Road, C	Columbia, N	AO 65	202					~			
Latitude:	39.07803	AQCR:	137	North	ern Miss	ouri						
Longitude:	-92.31632	MSA:	1740	Colun	nbia, MO							
Elevation (ft):  Pollutant	726  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperatur	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other

Page 39 of 74 Thursday, June 01, 2017

44201	SLAMS	1		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	Max Ozone Concentration & Population Exposure
44201	SLAMS	2		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	-
								AQ	S Site Nu	mber <b>29-1</b> 79	-0002
36, Westfork	t, MO 644	98									
37.46889	AQCR:	138	SE M	issouri							
-91.08847	MSA:	0000	Not in	a MSA							
1256 <i>AQS Code</i>	AQS Monitor Type	AQS POC	Кеер						AQS Method Code	AQS Method	AQS Monitor Objective
RM/FEM 14129	SLAMS	1		1/6	NBR	СОМ	105			Mass Spectroscopy	
y Y Foley, M	10 63347										
39.04577	AQCR:	137	North	ern Miss	ouri						
-90.84927	MSA:	7040	St. Lo	uis, MO-	IL						
715 AQS Code	AQS Monitor Type	AQS POC	Кеер						AQS Method Code		AQS Monitor Objective
re 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
	44201  36, Westfork 37.46889 -91.08847 1256  AQS Code  RM/FEM 14129  y Y Foley, M 39.04577 -90.84927 715  AQS Code	36, Westfork, MO 644 37.46889	36, Westfork, MO 64498  37.46889	### Add   SLAMS   2	### Add   Stams   2						

Thursday, June 01, 2017 Page 40 of 74

Ozone	44201	SLAMS	2		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	-
Wind Direction - Re	esultant 61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Wind Speed - Rest	ultant 61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Forest City	, Exide L	evee							AQ.	S Site Nu	mber <b>29-0</b> 87	-0008
300 S. Washii	ngton St., Or	egon MO,	64473	3								
Latitude:	40.027222	AQCR:	137	North	ern Miss	ouri						
Longitude:	-95.235833	MSA:	0000	Not in	n a MSA							
Elevation (ft):	904 <i>AQS</i>	AQS Monitor	AQS		AQS	405	State-	AQS Unit-	AQS	AQS Method	AQS	AQS Monitor
Pollutant	Code	Type		Keep	Freq	Scale		Code	Unit	Code	Method	Objective
Lead (TSP) - LC FI	RM/FEM 14129	SLAMS	1		1/6	MID	COM	105	ug/m^3-L0	C 813	Inductively Coupled Plasma	Source Oriented
											Mass Spectroscopy	
Forast Pari	k. PM10-	FFM ov	nt sul	hmiti	ing /	105/	lata		40	S Site Nu	Spectroscopy	-0094
Forest Pari	<u>k: PM10-</u> Avenue St				ing A	1 <i>08 a</i>	lata		AQ.	S Site Nu		-0094
Forest Pari		Louis, MO	O 6311	10	<b>'ing</b> /		lata		AQ.	S Site Nu	Spectroscopy	-0094
Latitude:	38.63114	Louis, Mo		l 0 Metro		t. Louis	lata		AQ	S Site Nu	Spectroscopy	-0094
Latitude: Longitude:		Louis, MO AQCR: MSA:	O 6311 070	l 0 Metro	ppolitan S	t. Louis	lata		AQ		Spectroscopy	
Latitude:	38.63114 -90.28115	Louis, Mo	0 6311 070 7040	Metro St. Lo	ppolitan S	t. Louis IL	State-	AQS Unit- Code	AQS Unit	S Site Nu AQS Method Code	Spectroscopy  mber29-510	AQS Monitor Objective

Thursday, June 01, 2017 Page 41 of 74

Black Carbon PM2.5 LC	88313	SPM	1	1	MIC	СОМ	105	ug/m^3-LC	894	Magee Scientific TAPI M633 Aethalometer	Source Oriented
Carbon Monoxide	42101	SLAMS	1	1	MIC	СОМ	007	ppm	055	Gas Filter Corr Thermo Electron 48C-TL	Source Oriented
Indoor Temperature	62107	SPM	1	1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Nitric Oxide	42601	SPM	1	1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	Source Oriented
Nitrogen Dioxide	42602	SLAMS	1	1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	Source Oriented
Outdoor Temperature	62101	SPM	1	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Outdoor Temperature	62101	SPM	2	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (10m Probe Height)
Outdoor Temperature	62101	SPM	3	1	N/A	MET	017	deg C	040	Electronic Averaging	Other (2m Probe Height)
Outdoor Temperature Diff	62106	SPM	1	1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other (10m - 2m Probe Height)
Oxides of Nitrogen	42603	SPM	1	1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	Source Oriented

Thursday, June 01, 2017 Page 42 of 74

PM10 - LC/FEM/NonFEM	85101	SPM	5		1	MIC	СОМ	105	ug/m^3-LC	790	FDMS- Source Gravimetric 1405- Oriented DF
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	<b>✓</b>	1	MIC	СОМ	105	ug/m^3-LC	208	FMDS- Source Gravimetric 1405- Oriented DF
PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	MIC	СОМ	001	ug/m^3	208	FMDS- Source Gravimetric 1405- Oriented DF
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	MIC	СОМ	105	ug/m^3-LC	182	FMDS- Source Gravimetric 1405- Oriented DF
PM2.5 Tot Atmospheric	88500	SPM	1		1	MIC	AQI	105	ug/m^3-LC	790	FDMS- Source Gravimetric 1405- Oriented DF
PM2.5 Volatile Channel	88503	SPM	1		1	MIC	AQI	105	ug/m^3-LC	790	FDMS- Source Gravimetric 1405- Oriented DF
PMCoarse - LC FRM/FEM	86101	SLAMS	8		1	MIC	СОМ	105	ug/m^3-LC	207	FMDS- Source Gravimetric 1405- Oriented DF
Precipitation	65102	SPM	1		1	N/A	MET	021	inches	014	Heated Tipping Other Bucket
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Other Computed (Indirect)

Thursday, June 01, 2017 Page 43 of 74

Solar Radiation	63301	SLAMS	1		1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
UV Carbon PM2.5 LC	88314	SPM	1		1	MIC	СОМ	105	ug/m^3-LC	C 894	Magee Scientific TAPI M633 Aethalometer	Source Oriented
WD - Sigma Theta (Horizontal)	61106	SPM	1		1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
Wind Direction - Resultar	nt 61104	SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Wind Speed - Resultant	61103	SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Front Street									AQS	S Site Nu	mber29-095	-0018
Front Street 1331 N. Jackson, I	Kansas (	City, MO	54120						AQS	S Site Nu	<u>mber29-095</u>	-0018
1331 N. Jackson,	Kansas (	City, MO (	64120 094	Metro	politan K	ansas Cii	ty		<i>AQ</i> S	S Site Nu	<u>mber29-095</u>	-0018
1331 N. Jackson, J. Latitude: 39.1		•			politan K as City, N		y		AQS	S Site Nu	<u>mber<b>29-</b>095</u>	<u>-0018</u>
1331 N. Jackson, J. Latitude: 39.1	3198	AQCR:	094 3760 <i>AQS</i>	Kansa	as City, N	10-KS	State-			AQS	AQS	-0018  AQS  Monitor  Objective
1331 N. Jackson, Latitude: 39.1  Longitude: -94.8  Elevation (ft): 728	3198 53128 <i>AQS</i>	AQCR: MSA: AQS Monitor	094 3760 <i>AQS</i>	Kansa	as City, N	10-KS <i>AQS</i>	State-	Unit-	AQS	AQS Method	AQS	AQS Monitor

Thursday, June 01, 2017 Page 44 of 74

Thursday, June 01, 2017 Page 45 of 74

Scale Obj

POC Keep Freq

Code Unit

Method

**Objective** 

Code

Type

Code

Pollutant

Pollutant	A	IQS ode	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS	AQS Method Code	AQS	AQS Monitor Objective
Elevation (ft):	-90.376 462			· -	_5	, '							
Latitude: Longitude:	38.271° -90.376		AQCR: MSA:	7040		uis, MO-							
460 Sherman S	•		•	, 6304 070		politan S	t Louis						
Herculaneu				(00:	0					AQS	Site Nu	mber <b>29-099</b>	-0013
Wind Speed - Resu	ıltant	61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Wind Direction - Re	sultant	61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Sulfur Dioxide Max Avg	5-min	42406	SPM	1		1	MID	СОМ	800	ppb	060	Pulsed Fluorescent	Source Oriented & Highest Concentration
Sulfur Dioxide		42401	SLAMS	1		1	MID	СОМ	800	ppb	060	Pulsed Fluorescent	Source Oriented & Highest Concentration
Lead (TSP) - LC FF	RM/FEM	14129	SLAMS	2		1/2	MID	СОМ	105	ug/m^3-LC	813	Inductively Coupled Plasma Mass Spectroscopy	Quality Assurance (Collocation)
Lead (TSP) - LC FF	RM/FEM	14129	SLAMS	1		1/1	MID	COM	105	ug/m^3-LC	813	Inductively Coupled Plasma Mass Spectroscopy	Source Oriented & Highest Concentration
Indoor Temperature	e	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other

Thursday, June 01, 2017 Page 46 of 74

Hillcrest High	Schoo	ol: PM1	0-FE	M n	ot su	bmitt	ing A	OS d	at AQ	S Site Nu	mber29 <b>-</b> 077	-0036
3319 N. Grant, Spi	ringfield	d, MO 658	03									
Latitude: 37.25	56069	AQCR:	139	SW M	lissouri							
Longitude: -93.2	299692	MSA:	7920	Spring	gfield, Mo	)						
Elevation (ft): 1321  Pollutant	AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code		AQS Monitor Objective
Barometric Pressure	64101	SPM	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Outdoor Temperature	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Ozone	44201	SLAMS	1		1	URB	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone	44201	SLAMS	2		1	URB	COM	007	ppm	047	Ultraviolet Photometric	-
PM10 - LC/FEM/NonFEM	1 85101	SPM	5		1	NBR	СОМ	105	ug/m^3-L0	C 790	FDMS- Gravimetric 1405 DF	Population - Exposure

Thursday, June 01, 2017 Page 47 of 74

PM10 - LC/FEM/NonFEM	85101	SLAMS	8	<b>✓</b>	1	NBR	COM	105	ug/m^3-LC	208	FMDS- Gravimetric 1405 DF	Population - Exposure
PM10 - STP FRM/FEM	81102	SLAMS	3		1	NBR	СОМ	001	ug/m^3	079	R&P SA246B TEOM	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	NBR	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405 DF	Population - Exposure
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405 DF	Population - Exposure
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PMCoarse - LC FRM/FEM	1 86101	SLAMS	8		1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405 DF	Population - Exposure
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other

Thursday, June 01, 2017 Page 48 of 74

Labadie, N	orthwest								AQS	S Site Nu	mber29-183	3-9002
Rt. 94, Augus	ta, MO 6333	32 near the	inters	ection	with S	Schlue	sburg l	Road				
Latitude:	38.5818	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.865528	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft):  Pollutant	550  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Relative Humidity	62201	Industrial	1		1	N/A	MET	019	%humidity	v 061	Met One 083D	Other
Ladue									AQ.	S Site Nu	mber29-189	9-3001
73 Hunter Av	e., Ladue, M	IO 63124										
Latitude:	38.65028	AQCR:	070	Metro	politan S	st. Louis						
Longitude:	-90.35021	MSA:	7040	St. Lo	uis, MO-	IL.						
Elevation (ft):  Pollutant	511  AQS Code	AQS Monitor Type	AQS POC	Кеер		AQS Scale		AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Barometric Pressu	ıre 64101	SPM	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Indoor Temperatur	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Outdoor Temperati	ure 62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)

Page 49 of 74 Thursday, June 01, 2017

NBR

COM

105

ug/m^3-LC 181

SLAMS 1 1

PM2.5 - LC FRM/FEM

88101

PM2.5 VSCC Population FEM or Thermo Scientific 1405-F

Population

PM2.5 - LC FRM/FEM	88101	SLAMS	2		1/6	NBR	COM	105	ug/m^3-L(	C 145	R&P 2025 Sequential w/VSCC	Quality Assurance (Collocation)
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Wind Direction - Resultant	t 61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (10m Tower)
Wind Speed - Resultant	61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (10m Tower)
Liberty: PM10-	-FEM	not sub	mitt	ing A	lOS a	data			AQ	S Site Nu	mber <b>29-04</b> 7	-0005
Highway 33 & Cou	ınty Ho	me Rd., L	iberty,	, MO 6	54068							
Latitude: 39.30	314	AQCR:	094	Metro	politan K	ansas Ci	ty					
Latitude: 39.30 Longitude: -94.3		AQCR: MSA:	094 3760		oolitan K ıs City, N		ty					
		MSA:					ty					
Longitude: -94.33 Elevation (ft): 941		_	3760  AQS		is City, N $A = A Q S$		State-	AQS Unit- Code		AQS Method Code		AQS Monitor Objective
Longitude: -94.33 Elevation (ft): 941	7678 <b>AQS</b>	MSA:  AQS  Monitor	3760  AQS	Kansa	is City, N $A = A Q S$	no-ks	State-	Unit-		Method	AQS	Monitor
Longitude: -94.3.  Elevation (ft): 941  Pollutant	7678 AQS Code	MSA:  AQS  Monitor Type	3760  AQS POC	Kansa	as City, N AQS Freq	AQS Scale	State- Obj	Unit- Code	Unit	Method Code	AQS Method  Instrumental- Barometric	Monitor Objective

Thursday, June 01, 2017 Page 50 of 74

Ozone	44201	SLAMS	1		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone	44201	SLAMS	2		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	-
PM10 - LC/FEM/NonFEM	85101	SPM	5		1	NBR	СОМ	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	NBR	COM	105	ug/m^3-LC	208	FMDS- Gravimetric 1405 DF	Population - Exposure
PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	NBR	COM	001	ug/m^3	208	FMDS- Gravimetric 1405 DF	Population - Exposure
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405 DF	Population - Exposure
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405 DF	Population - Exposure
PMCoarse - LC FRM/FEN	1 86101	SLAMS	8		1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405 DF	Population - Exposure
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other

Thursday, June 01, 2017 Page 51 of 74

Solar Radiation	63301	SPM	1		1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Wind Direction - Resultar	nt 61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Wind Speed - Resultant	61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Margaretta									AQ	S Site Nu	mber29-510	-0086
4520 Margaretta, S	St. Louis	s, MO 631	05									
Latitude: 38.6	73172	AQCR:	070	Metro	politan S	t. Louis						
Longitude: -90.2	239086	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft): 514	AQS	AQS Monitor	AQS		AQS	AQS	State-	AQS Unit-	AQS	AQS Method		AQS Monitor
Pollutant	Code	Туре		Keep	Freq			Code	Unit	Code		<b>Objective</b>
Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Nitric Oxide	42601	SPM	1		1	NBR	СОМ	008	ppb	074	Chemiluminescer ce	n Population Exposure
Nitrogen Dioxide	42602	SLAMS	1		1	NBR	COM	008	ppb	074	Chemiluminescer ce	Population Exposure

Thursday, June 01, 2017 Page 52 of 74

PM10 - STP FRM/FEM	81102	SLAMS	3		1	MID	СОМ	001	ug/m^3	079	R&P SA246B TEOM	Population Exposure
Sulfur Dioxide	42401	SLAMS	1		1	NBR	СОМ	008	ppb	060	Pulsed Fluorescent	Population Exposure
Sulfur Dioxide Max 5-mi Avg	n 42406	SLAMS	1		1	NBR	СОМ	008	ppb	060	Pulsed Fluorescent	Population Exposure
Mark Twain S	tate Po	ark							AQ	S Site Nu	mber <b>29-13</b> 7	-0001
20057 State Park	Office R	d., Stouts	ville, N	AO 65	5283							
Latitude: 39.4	7510	AQCR:	137	North	ern Miss	ouri						
Longitude: -91.	78899	MSA:	0000	Not in	n a MSA							
Elevation (ft): 710	AQS	AQS Monitor	AQS		AQS	AQS	State-	AQS Unit-	AQS	AQS Method		AQS Monitor
Pollutant	Code	Туре	POC	Keep	Freq	Scale	Obj	Code	Unit	Code	Method	<b>Objective</b>
Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Indoor Temperature  Nitric Oxide	62107 42601	SPM SPM	1		1	N/A REG	MET	017	deg C		Electronic	Other
										013	Electronic Averaging Chemiluminescer	Other  General/Back ground

Thursday, June 01, 2017 Page 53 of 74

Pollutant	AQS Code		AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code		AQS Monitor Objective
Longitude: Elevation (ft):	-90.47606 607	MSA:	7040	5í. L0	uis, MO-	IL						
Latitude:	38.71085	AQCR:			politan S							
13044 Marine	ŕ		•									
Marvland E									AQS	S Site Nui	mber <b>29-1</b> 89	-0014
Wind Speed - Resu	ıltant 611	03 SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Wind Direction - Re	esultant 611	04 SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Sulfur Dioxide Max Avg	5-min 424	06 SPM	1		1	NBR	СОМ	008	ppb	060	Pulsed Fluorescent	General/Back ground
Sulfur Dioxide	424	01 SPM	1		1	REG	SIP	008	ppb	060	Pulsed Fluorescent	General/Back ground
PM10 - STP FRM/F	FEM 811	02 SPM	3		1	REG	SIP	001	ug/m^3	079	R&P SA246B TEOM	General/Back ground
Ozone	442	01 SLAMS	2		1	REG	COM	007	ppm	047	Ultraviolet Photometric	-
Ozone	442	01 SLAMS	1		1	REG	COM	007	ppm	047	Ultraviolet Photometric	General/Back ground

Thursday, June 01, 2017 Page 54 of 74

Indoor Temperature	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone	44201	SLAMS	2		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	·
New Bloom	field								AQ	S Site Nu	mber29 <b>-</b> 02	7-0002
2625 Meadow	Lake View,	, New Blo	omfiel	d, MC	), 6506	53						
Latitude:	38.70608	AQCR:	137	North	ern Miss	ouri						
Longitude:	00 00000	MSA:	0000	Not in	n a MSA							
Longitude.	-92.09308	MSA:	0000	NOUT	i a ivioA							
Elevation (ft):  Pollutant	-92.09308 860 AQS Code	MSA:  AQS  Monitor  Type	AQS		AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Elevation (ft):	AQS Code	AQS Monitor	AQS		AQS			Unit-		Method		Monitor
Elevation (ft):  Pollutant	AQS Code	AQS Monitor Type	AQS POC		AQS Freq	Scale	Obj	Unit- Code	Unit	Method Code	Method Electronic	Monitor Objective

Thursday, June 01, 2017 Page 55 of 74

Oates									AQ	S Site Nu	mber <b>29-17</b> 9	-0034
13155 Highw	ay KK, Boss	, MO 654	40									
Latitude:	37.56485	AQCR:	138	SE M	issouri							
Longitude:	-91.11423	MSA:	0000	Not in	a MSA							
Elevation (ft):	1134 <i>AQS</i>	AQS Monitor	AQS		AQS	AQS	State-	AQS Unit-	AQS	AQS Method	AQS	AQS Monitor
Pollutant	Code	Туре	PÕC	Keep		Scale		Code	_	Code	Method	<b>Objective</b>
Lead (TSP) - LC Fl	RM/FEM 14129	SLAMS	1		1/6	NBR	СОМ	105	ug/m^3-Lú	C 813	Inductively Coupled Plasma Mass Spectroscopy	Source Oriented
Orchard Fo	arm								AQ	S Site Nu	mber29-183	-1004
2165 Highway	y V, St. Chai	les, MO 6	3301									
Latitude:	38.8994	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.44917	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft):	441	AQS						400		400		105
Pollutant	AQS Code	Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	_	AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperatur	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	URB	СОМ	007	ppm	047	Ultraviolet Photometric	Extreme Downwind
Ozone	44201	SLAMS	2		1	URB	СОМ	007	ppm	047	Ultraviolet Photometric	-

Thursday, June 01, 2017 Page 56 of 74

18701 Old Hi	ghway 66,	Pacific, MO	) 6303	39						S Suc I van		
Latitude:	38.49011	AQCR:	070	Metro	politan S	st. Louis						
Longitude:	-90.70509	MSA:	7040	St. Lo	uis, MO-	IL						
Elevation (ft):  Pollutant	524  AQS Code	AQS Monitor Type	AQS POC		AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS	AQS Monitor Objective
Indoor Temperatur	e 6210	7 SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Outdoor Temperat	ure 6210	1 SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other
Ozone	4420	1 SLAMS	1		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone	4420	1 SLAMS	2		1	NBR	СОМ	007	ppm	047	Ultraviolet	-
020,10		. • • • • • • • • • • • • • • • • • • •	_		·				PP	• • • • • • • • • • • • • • • • • • • •	Photometric	
Wind Direction - Ro	esultant 6110	4 SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Wind Speed - Res	ultant 6110:	3 SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)

Thursday, June 01, 2017 Page 57 of 74

Thursday, June 01, 2017 Page 58 of 74

Ozone	44201	SLAMS	2		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	-
PM10 - LC/FEM/NonFEM	85101	SPM	5		1	NBR	COM	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population - Exposure
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	NBR	СОМ	105	ug/m^3-LC	208	FMDS- Gravimetric 1405- DF	Population - Exposure
PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	NBR	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Population - Exposure
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Population - Exposure
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population - Exposure
PMCoarse - LC FRM/FEN	1 86101	SLAMS	8		1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405- DF	Population - Exposure
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other

Thursday, June 01, 2017 Page 59 of 74

Wind Direction - Re	esultant 61104	SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Wind Speed - Resu	iltant 61103	SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Rider Trail.	<i>I</i> -70								AO	S Site Nu	mber <b>29-18</b> 9	-0016
13080 Hollent		Bridgeton,	, MO 6	3044					112	,5 200 1 100		0010
Latitude:	38.75264	AQCR:	070	Metro	politan S	St. Louis						
Longitude:	-90.44884	MSA:	7040	St. Lo	ouis, MO-	·IL						
Elevation (ft):  Pollutant	515  AQS Code	AQS Monitor Type	AQS POC	Keep	AQS Freq	AQS Scale	State- Obi	AQS Unit- Code	_	AQS Method Code	AQS	AQS Monitor Objective
			100		2,04	20000		Couc		Couc	1/20000	Објесите
Indoor Temperature	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Nitric Oxide	42601	SPM	1		1	MIC	COM	008	ppb	074	Chemiluminescer ce	n Source Oriented
Nitrogen Dioxide	42602	SLAMS	1		1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	n Source Oriented
Outdoor Temperatu	ıre 62101	SPM	2		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (10m Probe Height)
Outdoor Temperatu	ıre 62101	SPM	3		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (2m Probe Height)

Thursday, June 01, 2017 Page 60 of 74

Outdoor Temperature Diff	62106	SPM	1		1	N/A	MET	116	Temp Diff deg C	041	Instrumental: Elect or Mach Avg Lev 2-Lev1	Other (10m - 2m Probe Height)
Oxides of Nitrogen	42603	SPM	1		1	MIC	СОМ	008	ppb	074	Chemiluminescer ce	Source Oriented
Precipitation	65102	SPM	1		1	N/A	MET	021	inches	014	Heated Tipping Bucket	Other
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Solar Radiation	63301	SPM	1		1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Sulfur Dioxide	42401	SPM	1	<b>✓</b>	1	MID	SPP	008	ppb	060	Pulsed Fluorescent	Population Exposure
Sulfur Dioxide Max 5-min Avg	42406	SPM	1	✓	1	MID	SPP	008	ppb	060	Pulsed Fluorescent	Population Exposure
WD - Sigma Theta (Horizontal)	61106	SPM	1		1	N/A	MET	014	deg	020	Arithmetic Standard Deviation	Other (10m Tower)
Wind Direction - Resultant	61104	SPM	1		1	N/A	MET	014	deg	065	Instrumental: RM Young Model 05305	Other (10m Tower)

Thursday, June 01, 2017 Page 61 of 74

Wind Speed - Resu	ıltant	61103	SPM	1		1	N/A	MET	012	mph	065	Instrumental: RM Young Model 05305	Other (10m Tower)
Rocky Cree	k									AQ	S Site Nu	mber <b>29-04</b> 7	-0006
13131 Highwa	ay 169	, Kans	sas City, N	IO 64	165								
Latitude:	39.331	88	AQCR:	094	Metro	politan K	ansas Cit	ty					
Longitude:	-94.580	069	MSA:	3760	Kansa	as City, N	IO-KS						
Elevation (ft):  Pollutant		1QS ode	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperature	e	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone		44201	SLAMS	1		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone		44201	SLAMS	2		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	-
Savannah										AQ	S Site Nu	mber <b>29-00</b> 3	s <b>-</b> 0001
11796 Highwa	ay 71,	Savan	nah, MO (	54485									
Latitude:	39.954	4	AQCR:	137	North	ern Miss	ouri						
Longitude:	-94.849	9	MSA:	7000	St. Jo	seph, M	)						
Elevation (ft):  Pollutant		1QS Tode	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperature	e	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other

Page 62 of 74 Thursday, June 01, 2017

Ozone		44201	SLAMS	1		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	Population Exposure
Ozone		44201	SLAMS	2		1	NBR	СОМ	007	ppm	047	Ultraviolet Photometric	-
South Broa	dwa	v: <i>PN</i>	110-FE	M no	t sul	mitti	ing A	OS de	ata	AQS	S Site Nu	mber29-510	-0007
8227 South Br	roadw	ay, St.	Louis, Mo	O 631	l 1								
Latitude:	38.542	25	AQCR:	070	Metro	politan Si	t. Louis						
Longitude:	-90.26	3611	MSA:	7040	St. Lo	uis, MO-I	L						
Elevation (ft):  Pollutant		A <b>QS</b> Code	AQS Monitor Type	AQS POC	Кеер		AQS Scale	State- Obi	AQS Unit- Code		AQS Method Code	AQS	AQS Monitor Objective
Barometric Pressu	ıre	64101	SLAMS	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Indoor Temperature	e	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Outdoor Temperatu	ure	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
PM10 - LC/FEM/No	onFEM	85101	SPM	5		1	NBR	сом	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM10 - LC/FEM/No	onFEM	85101	SLAMS	8	✓	1	NBR	СОМ	105	ug/m^3-LC	208	FMDS- Gravimetric 1405- DF	Population Exposure

Thursday, June 01, 2017 Page 63 of 74

PM10 - STP FRM/FEM	81102	SLAMS	8	<b>✓</b>	1	NBR	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Population - Exposure
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	COM	105	ug/m^3-LC	C 182	FMDS- Gravimetric 1405- DF	Population - Exposure
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-L0	C 790	FDMS- Gravimetric 1405- DF	Population - Exposure
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-L(	C 790	FDMS- Gravimetric 1405- DF	Population - Exposure
PMCoarse - LC FRM/FEN	1 86101	SLAMS	8		1	NBR	СОМ	105	ug/m^3-L(	C 207	FMDS- Gravimetric 1405- DF	Population Exposure
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
St. Joe State Pa	ırk								AQ.	S Site Nu	mber29 <b>-</b> 187	-0007
2800 Pimville Rd.,		ills, MO 6	3601									
<b>Latitude:</b> 37.81	413	AQCR:	138	SE Mis	ssouri							
Longitude: -90.50	0738	MSA:	0000	Not in a	a MSA							
Elevation (ft): 937		AQS						100		40C		105
	AQS Code	Monitor Type	AQS POC	Keep	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS	AQS Monitor Objective
Lead (TSP) - LC FRM/FEI	M 14129	SPM	1		1/6	NBR	СОМ	105	ug/m^3-L0	C 813	Inductively Coupled Plasma Mass Spectroscopy	Source Oriented

Thursday, June 01, 2017 Page 64 of 74

St. Joseph 1	$p_{um}$	p Stai	tion: PN	<u> 110-</u>	FEN	l not	subm	iitting	<i>AO</i> .	S d AQ	S Site Nu	mber29-021	-0005
S. Highway 75	59, St	. Josepl	h, MO 64:	501									
Latitude:	39.74	1667	AQCR:	094	Metro	politan K	ansas Ci	ty					
Longitude:	-94.85	8333	MSA:	7000	St. Jo	seph, M0	)						
Elevation (ft):  Pollutant		AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS	AQS Monitor Objective
Barometric Pressu	re	64101	SPM	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Barometric Pressu	re	64101	SPM	2		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Indoor Temperature	Э	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Outdoor Temperatu	ure	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Outdoor Temperatu	ıre	62101	SPM	2		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
PM10 - LC/FEM/No	onFEM	85101	SPM	5		1	NBR	COM	105	ug/m^3-L0	C 790	FDMS- Gravimetric 1405 DF	Population - Exposure
PM10 - LC/FEM/No	nEEM	85101	SPM	6		1	NBR	СОМ	105	πα/mγ3 I (	C 790	FDMS-	Quality
PIVITU - LO/FEM/INC	υIΓ⊏IVI	00101	SYN	Ö		ı	NDK	COIVI	105	ug/m^3-L0	2 190	Gravimetric 1405 DF	Quality - Assurance (Collocation)

Thursday, June 01, 2017 Page 65 of 74

PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	NBR	COM	105	ug/m^3-LC	208	FMDS- Gravimetric 1405- DF	Population Exposure
PM10 - LC/FEM/NonFEM	85101	SLAMS	9	✓	1	NBR	СОМ	105	ug/m^3-LC	208	FMDS- Gravimetric 1405- DF	Quality Assurance (Collocation)
PM10 - STP FRM/FEM	81102	SLAMS	3		1	NBR	СОМ	001	ug/m^3	079	R&P SA246B TEOM	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	8	✓	1	NBR	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	9	✓	1	NBR	COM	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Quality Assurance (Collocation)
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Population Exposure
PM2.5 - LC FRM/FEM	88101	SLAMS	5		1	NBR	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Quality Assurance (Collocation)
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM2.5 Tot Atmospheric	88500	SPM	2		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Quality Assurance (Collocation)
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure

Thursday, June 01, 2017 Page 66 of 74

Elevation (ft):  Pollutant		IQS ode	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS	AQS Method Code	AQS	AQS Monitor Objective
Longitude:	-94.555	594	MSA:	3760	Kansa	s City, N	10-KS						
Latitude:	39.530	63	AQCR:	137		ern Misso							
7536 SW. O H	Highwa	ay, Trii											
Trimble										AQS	Site Nu	mber29-049	-0001
Wind Speed - Resu	ultant	61103	SPM	1		1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Wind Direction - Re	esultant	61104	SPM	1		1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (5.5 meters)
Relative Humidity		62201	SPM	2		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Relative Humidity		62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
PMCoarse - LC FR	M/FEM	86101	SLAMS	9		1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405- DF	Quality Assurance (Collocation)
PMCoarse - LC FR	M/FEM	86101	SLAMS	8		1	NBR	СОМ	105	ug/m^3-LC	207	FMDS- Gravimetric 1405- DF	Population Exposure
PM2.5 Volatile Cha	innel	88503	SPM	2		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Quality Assurance (Collocation)

Thursday, June 01, 2017 Page 67 of 74

Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	NBR	сом	007	ppm	047	Ultraviolet Photometric	Max Ozone Concentration
Ozone	44201	SLAMS	2		1	NBR	COM	007	ppm	047	Ultraviolet Photometric	-
Troost: PM10	-FEM	not sub	mitti	ng A	OS a	lata			AQ.	S Site Nu	mber <b>29-0</b> 95	-0034
724 Troost (Rear	), Kansa	s City, MO	0 6410	06								
Latitude: 39.	10465	AQCR:	094	Metro	politan K	Kansas Ci	ty					
Longitude: -94	.57055	MSA:	3760	Kans	as City, N	MO-KS						
Elevation (ft): 941	AQS	AQS Monitor	AQS		AQS	AQS	State-	AQS Unit-	AQS	AQS Method		AQS Monitor
Pollutant	Code	Type	POC	Keep		Scale		Code		Code		<b>Objective</b>
Barometric Pressure	64101	SPM	1		1	N/A	MET	059	mm (Hg)	014	Instrumental- Barometric Sensor	Other
Indoor Temperature	62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Nitric Oxide	42601	SPM	1		1	URB	сом	008	ppb	074	Chemiluminescen ce	Population Exposure

Thursday, June 01, 2017 Page 68 of 74

Outdoor Temperature	62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other (4m Probe Height)
Oxides of Nitrogen	42603	SPM	1		1	URB	СОМ	008	ppb	074	Chemiluminescen ce	Population Exposure
PM10 - LC/FEM/NonFEM	85101	SPM	5		1	NBR	СОМ	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM10 - LC/FEM/NonFEM	85101	SLAMS	8	✓	1	NBR	СОМ	105	ug/m^3-LC	208	FMDS- Gravimetric 1405- DF	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	3		1	NBR	СОМ	001	ug/m^3	079	R&P SA246B TEOM	Population Exposure
PM10 - STP FRM/FEM	81102	SLAMS	8	✓	1	NBR	СОМ	001	ug/m^3	208	FMDS- Gravimetric 1405- DF	Population Exposure
PM2.5 - LC FRM/FEM	88101	SLAMS	4		1	NBR	СОМ	105	ug/m^3-LC	182	FMDS- Gravimetric 1405- DF	Population Exposure
PM2.5 Tot Atmospheric	88500	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PM2.5 Volatile Channel	88503	SPM	1		1	NBR	AQI	105	ug/m^3-LC	790	FDMS- Gravimetric 1405- DF	Population Exposure
PMCoarse - LC FRM/FEN	1 86101	SLAMS	8		1	NBR	COM	105	ug/m^3-LC	207	FMDS- Gravimetric 1405-	Population Exposure

Thursday, June 01, 2017 Page 69 of 74

Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	020	Instrumental- Computed (Indirect)	Other
Sulfur Dioxide	42401	SLAMS	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide Max Avg	5-min 42406	SLAMS	1		1	MID	СОМ	800	ppb	060	Pulsed Fluorescent	Source Oriented
Ursuline No	orth								AQS	S Site Nu	mber <b>29-0</b> 99	-0025
210 Glennon l		, Crystal C	ity, M	O 630	19							
Latitude:	38.243	AQCR:	070	Metro	politan S	St. Louis						
Longitude:	-90.37372	MSA:	7040	St. Lo	ouis, MO	-IL						
Elevation (ft):	578	AQS						405		400		105
Pollutant	AQS Code	Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	_	AQS Method Code	AQS Method	AQS Monitor Objective
Lead (TSP) - LC FF	RM/FEM 14129	SLAMS	1		1/6	NBR	СОМ	105	ug/m^3-LC	813	Inductively Coupled Plasma Mass Spectroscopy	Source Oriented & Upwind Background
Watkins Mi	ll State F	Park							AQS	S Site Nu	mber29-047	<b>'-0003</b>
Watkins Mill	Road, Laws	on, MO 64	1062									
Latitude:	39.407419	AQCR:	094	Metro	politan k	Kansas Ci	ity					
Longitude:	-94.265142	MSA:	3760	Kans	as City, <b>I</b>	MO-KS						
Elevation (ft):  Pollutant	1009  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code		AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperature	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other

Thursday, June 01, 2017 Page 70 of 74

Ozone	44201	SLAMS	1		1	URB	COM	007	ppm	047	Ultraviolet Photometric	Extreme Downwind
Ozone	44201	SLAMS	2		1	URB	COM	007	ppm	047	Ultraviolet Photometric	-
West Alton									AO.	S Site Nu	mber <b>29-18</b> :	3-1002
General Elecr	ic Store, Hig	ghway 94,	West 2	Alton,	MO 6	3386			112.	3 2000 1 100		<u> </u>
Latitude:	38.8725	AQCR:	070	Metro	politan S	t. Louis						
Longitude:	-90.226389	MSA:	7040	St. Lo	ouis, MO-	IL						
Elevation (ft):  Pollutant	425  AQS  Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obi	AQS Unit- Code		AQS Method Code	AQS Method	AQS Monitor Objective
Indoor Temperatur	e 62107	SPM	1		1	N/A	MET	017	deg C	013	Electronic Averaging	Other
Outdoor Temperati	ure 62101	SPM	1		1	N/A	MET	017	deg C	040	Electronic Averaging	Other
Ozone	44201	SLAMS	1		1	URB	СОМ	007	ppm	047	Ultraviolet Photometric	Max Ozone Concentration & Population Exposure
Ozone	44201	SLAMS	2		1	URB	COM	007	ppm	047	Ultraviolet	-
Relative Humidity	62201	SPM	1		1	N/A	MET	019	%humidity	, 020	Instrumental- Computed (Indirect)	Other

Thursday, June 01, 2017 Page 71 of 74

Solar Radiation	63301	SPM	1	1	N/A	MET	079	W/m^2	011	Instrumental- Pyranometer	Other
Wind Direction - Resultant	61104	SPM	1	1	N/A	MET	014	deg	067	Instrumental: RM Young Model 05103	Other (10m Tower)
Wind Speed - Resultant	61103	SPM	1	1	N/A	MET	012	mph	067	Instrumental: RM Young Model 05103	Other (10m Tower)

Thursday, June 01, 2017 Page 72 of 74

## **Magnitude 7 Metals (PQAO - 2368)**

Magnitude	7 Metals	s. Site # .	<u>l AE</u>	CIN	/ater	Tow	er Lo	<u>catio</u>	$^{\prime\prime}$ $AQ$	S Site Nu	mber29-14	3-9001
391 St Jude In	ndustrial Pa	rk, New Ma	adrid,	MO 6	3869							
Latitude:	36.51364	AQCR:	138	SE M	issouri							
Longitude:	-89.56093	MSA:	0000	Not in	a MSA							
Elevation (ft):  Pollutant	297  AQS Code	AQS Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	AQS Method	AQS Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide Max Avg	c 5-min 42406	industrial	1		1	MID	COM	008	ppb	060	Pulsed Fluorescent	Source Oriented
Magnitude	7 Metal.	), DUU 11 2	2 <i>Ea</i> .		avey	ard			ΑQ	S Site Nu	mber <b>29-1</b> 4	3-9002
Magnitude 391 St Jude In	ndustrial Pa	rk, New Ma		MO 6	3869	ard			ΑQ	S Site Nu	mber <b>29-14</b>	3-9002
Latitude:	ndustrial Pa 36.50838	rk, New Ma	138	MO 6 SE M	3869 issouri	ard			ΑQ	S Site Nu	mber <b>29-14</b>	3-9002
Latitude: Longitude:	ndustrial Pa 36.50838 -89.56074	rk, New Ma		MO 6 SE M	3869	ard			ΑQ	S Site Nu	mber <b>29-14</b>	3-9002
Latitude:	ndustrial Pa 36.50838 -89.56074	rk, New Ma	138 0000 <i>AQS</i>	MO 6 SE M	3869 issouri n a MSA		State- Obj	AQS Unit- Code	AQS Unit	AQS Method Code	mber <b>29-14</b> AQS Method	AQS Monitor Objective
Latitude: Longitude: Elevation (ft):	ndustrial Pa 36.50838 -89.56074 296 <i>AQS</i>	rk, New Ma AQCR: MSA: AQS Monitor Type	138 0000 <i>AQS</i>	MO 6. SE M Not ir	3869 issouri n a MSA	AQS		Unit-	AQS	AQS Method	AQS	AQS Monitor

Thursday, June 01, 2017 Page 73 of 74

391 St Jude Industrial Park, New Madrid, MO 63869												
Latitude:	36.50899	AQCR:	138	SE M	issouri							
Longitude:	-89.57099	MSA:	0000	Not in	a MSA							
Elevation (ft):	298	AQS						AQS		AQS		AQS
Pollutant	AQS Code	Monitor Type	AQS POC	Кеер	AQS Freq	AQS Scale	State- Obj		AQS Unit	Method Code	AQS Method	Monitor Objective
Sulfur Dioxide	42401	Industrial	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented
Sulfur Dioxide Max Avg	5-min 42406	Industrial	1		1	MID	СОМ	008	ppb	060	Pulsed Fluorescent	Source Oriented

Thursday, June 01, 2017 Page 74 of 74

## APPENDIX 2: COMMENTS ON PROPOSED 2017 MONITORING NETWORK PLAN, RESPONSES TO COMMENTS, AND CORRECTIONS

This proposed Monitoring Network Plan was posted on the internet for public comment on June 1, 2017. No comments were received through July 3, 2017. Therefore, no response to comments is needed.

Two corrections to the proposed plan are included in this final plan, both in Section 1:

- The discussion of the NorthStar Battery facility was updated to refer to the most recent revised permit for the facility and the lead emission limit in that permit.
- The date for proposed discontinuation of the Pevely lead monitoring site was corrected to the end of calendar year 2017.