

2018 Delaware Ambient Air Monitoring Network Description for Criteria Pollutants



Division of Air Quality
Department of Natural Resources and Environmental Control

715 Grantham Lane
New Castle, DE 19720
(302) 323-4542

And

State Street Commons
100 W. Water St.
Suite 6A
Dover, DE 19904
(302) 739-9402

June 30, 2018

| | |
|---|-----------|
| LIST OF ACRONYMS | 2 |
| INTRODUCTION | 3 |
| REQUIREMENTS FOR MONITORING NETWORK DESCRIPTIONS | 3 |
| DELAWARE AMBIENT AIR MONITORING NETWORK ASSESSMENT 2015 | 5 |
| Executive Summary | 5 |
| Results | 6 |
| DELAWARE AIR MONITORING NETWORK | 7 |
| History of air monitoring in Delaware | 7 |
| Network Overview | 7 |
| National Core Monitoring Strategy – NCore | 7 |
| Monitoring Site Network Map and Information..... | 8 |
| CRITERIA POLLUTANT NETWORK DESCRIPTION BY PARAMETER | 12 |
| Ozone (O3) | 12 |
| Monitoring Requirements | 12 |
| Ozone Design Values | 13 |
| Sulfur Dioxide (SO2) | 13 |
| Monitoring Requirements | 13 |
| Carbon Monoxide (CO) | 15 |
| Monitoring Requirements | 15 |
| Nitrogen Dioxide (NO2) | 15 |
| Monitoring Requirements | 15 |
| Total Reactive Oxides of Nitrogen (NOY) | 16 |
| Particulate Matter - Fine (PM2.5) | 16 |
| Monitoring Requirements | 17 |
| Continuous PM2.5 | 18 |
| PM2.5 Design Values (2014 – 2016) | 18 |
| Particulate Matter (PM10) | 19 |
| Monitoring Requirements | 19 |
| Particulate Matter (PMcoarse) | 19 |
| AIR TOXICS POLLUTANT MONITORS | 20 |
| PHOTOCHEMICAL ASSESSMENT MONITORING SYSTEM (PAMS) MONITORS | 21 |
| SUMMARY OF CHANGES FROM 2016 | 23 |
| CHANGES ANTICIPATED FOR 2017 | 23 |
| DETAILED SITE DESCRIPTIONS | 24 |
| MONITORING METHOD INFORMATION | 35 |
| Ozone (O3)..... | 37 |
| Sulfur Dioxide (SO2) | 37 |
| Carbon Monoxide (CO)..... | 37 |
| Nitrogen Dioxide (NO2) and NOy..... | 37 |
| Particulate Matter - Fine (PM2.5), PM10, and PMcoarse | 37 |
| PM2.5 Speciation | 38 |
| VOCs | 38 |
| Metals | 38 |
| APPENDIX A PAMS MONITORING IMPLEMENTATION NETWORK PLAN - DELAWARE | 39 |

List of Acronyms

AQS – Air Quality System

CAA – Clean Air Act

CFR – Code of Federal Regulations

CO – carbon monoxide

CSA – combined statistical area

DNREC – Department of Natural Resources and Environmental Control

EPA – Environmental Protection Agency

FEM – Federal Equivalent Method

FRM – Federal Reference Method

lpm – liters per minute

MSA – metropolitan statistical area

NAAQS – National Ambient Air Quality Standards

NO – nitric oxide

NO₂ – nitrogen dioxide

NO_x – nitrogen oxides

O₃ – ozone

PAMS – Photochemical Assessment Monitoring System

Pb - lead

PM_{2.5} – fine particulate matter (2.5 microns)

PM₁₀ – respirable particulate matter (10 microns)

PM_{10-2.5} – coarse particulate matter (PM₁₀ – PM_{2.5})

SLAMS – state and local monitoring stations

SO₂ – sulfur dioxide

SPM – Special Purpose Monitor UFP – ultrafine particles

WS/WD – wind speed/wind direction

Introduction

In 1970, Congress passed the Clean Air Act that authorized the Environmental Protection Agency (EPA) to establish National Ambient Air Quality Standards (NAAQS) for pollutants shown to threaten human health and welfare. Primary standards were set according to criteria designed to protect public health, including an adequate margin of safety to protect sensitive populations such as children and asthmatics. Secondary standards were set according to criteria designed to protect public welfare (decreased visibility, damage to crops, vegetation, and buildings, etc.).

Seven pollutants currently have NAAQS: ozone (O₃), carbon monoxide (CO), sulfur dioxide (SO₂), nitrogen dioxide (NO₂), particulate matter less than 10 microns (PM₁₀), particulate matter less than 2.5 microns (PM_{2.5}) and lead (Pb). These are commonly called the "criteria" pollutants. When air quality does not meet the NAAQS, the area is said to be in "nonattainment" with the NAAQS.

Requirements for Monitoring Network Descriptions

In October 2006, the EPA issued final regulations concerning state and local agency ambient air monitoring networks (see 71 FR 61298). These regulations are codified at 40 CFR Part 58, and require periodic assessments of the monitoring networks including the information described below.

§58.10 Annual monitoring network plan and periodic network assessment, Section §58.10 (a) requires for each existing and proposed monitoring site:

- 1) A statement that the operation of each monitor meets the requirements of appendices A, C, D, and E of 40 CFR Part 58, where applicable.
- 2) Proposals for any State and Local Air Monitoring station (SLAMS) network modifications.

Section §58.10 (b) The annual monitoring network plan must contain the following information for each existing and proposed site:

- 1) The Air Quality System (AQS) site identification number.
- 2) The location, including street address and geographical coordinates.
- 3) The sampling and analysis method(s) for each measured parameter.
- 4) The operating schedules for each monitor.
- 5) Any proposals to remove or move a monitoring station within a period of 18 months following plan submittal.
- 6) The monitoring objective and spatial scale of representativeness for each monitor as defined in Appendix D to 40 CFR Part 58.
- 7) The identification of any sites that are suitable and sites that are not suitable for comparison against the annual PM_{2.5} NAAQS as described in §58.30.
- 8) The Metropolitan Statistical Area (MSA), Core Based Statistical Area (CBSA), Combined Statistical Area (CSA) or other area represented by the monitor.
- 9) The identification of required NO₂ monitors as either near-road or area-wide sites

in accordance with Appendix D to 40 CFR Part 58.

All proposed changes of SLAMS monitors in annual monitoring network plans and periodic network assessments are subject to EPA Regional approval according to 40 CFR Part 58.14.

Delaware Ambient Air Monitoring Network Assessment 2015

Executive Summary

40 CFR Part 58.10(d) requires Delaware to perform and submit to the EPA Regional Administrator an assessment of the air quality surveillance system every 5 years to determine, at a minimum, if the network meets the monitoring objectives defined in Appendix D of this part, whether new sites are needed, whether existing sites are no longer needed and can be terminated, and where new technologies are appropriate for incorporation in the ambient air monitoring network.

The 2015 network assessment report served as Delaware's most recent assessment under this requirement. For the 2015 5-Year Monitoring Network Assessment (Assessment), the Division of Air Quality (DAQ) performed a technical review of the data collected in the ambient monitoring network including the following:

1. Population data was summarized for all three counties in Delaware. This information was used to determine the appropriateness of monitoring for population exposure.
2. Meteorological parameters were reviewed to establish upwind / downwind relationships between a monitor site and surrounding emission sources.
3. Emission inventory summary data was reviewed. This information was used to determine if a monitor is sited appropriately to represent maximum pollution concentrations or specific ambient source impacts quantification.
4. Historical data collected at each site was reviewed for trends and comparison to the current National Ambient Air Quality Standards. This is helpful to determine if Delaware is achieving air quality improvements and meeting air quality standards.
5. Site by site correlation analysis was performed using tools supplied by EPA. Currently, EPA has provided this tool for O₃, PM_{2.5}, and PM₁₀. This information is used to determine if information collected at sites is redundant and if the site may be considered for elimination.
6. A bias calculation was performed to determine impacts that may occur if a monitor is removed from the network.

DAQ evaluated the data from this technical review according to defined performance measures. We also expanded performance measures beyond application of this technical information. Performance measures were organized into the following categories:

- a) Data Criteria
- b) Statistical Criteria
- c) Situational Criteria
- d) Future Needs and Special Considerations

Specific performance measures used in the Assessment were detailed in the Delaware Air

Monitoring Network – Current Network Description section. Not all performance measures were applicable to every monitor / site.

Based upon the evaluation of these performance measures, DAQ determined the importance (critical, credible, marginal, new site required) of each monitor in the network. Critical sites are of high value and will be continued. Credible sites are expected to continue, but may not be the design value location at or above the NAAQS. Marginal sites or monitors are subject for removal or movement. Any new site required represents potential areas of investment.

Results

The results of this Assessment indicated that the network contains only critical or credible sites. Issues that may impact future network design include new monitoring requirements associated with new or revised NAAQS, aging equipment/maintenance issues, and resource availability. When any future monitoring rules are promulgated, Delaware will work closely with EPA Region 3 to ensure that all new monitoring requirements are met.

The annual network plan for 2018 incorporates the results of the 2015 Assessment. Since all monitors are rated critical or credible, no changes were recommended for 2018.

Delaware Air Monitoring Network

History of air monitoring in Delaware

Air pollution monitoring in Delaware began in the 1950s, prior to the establishment of the US EPA. The first monitors were simple mechanisms or passive collectors such as dust-fall buckets and tape samplers. These were followed in the 1960s by wet-chemistry instruments, which were soon replaced by more advanced electronic instruments. The addition of computer technology in operating monitoring systems and air pollution data collection in the late 1970s and early 1980s was critical to the development of the core monitoring network that exists today.

The earliest monitors were placed near pollution sources to measure direct impact of pollution emissions. As ambient air pollution standards became established and monitoring methods standardized, the monitoring network expanded to include monitors in both urban and suburban areas. Monitoring goals shifted to include measuring high pollution concentrations in population centers, detecting trends, and determining compliance with the new national and ambient air quality standards, as well as establishing background levels and measuring pollution transported from areas outside of Delaware.

With the passage of the Clean Air Act in 1970, and the Clean Air Act Amendments in 1990, various control measures implemented by the federal and state governments resulted in major improvements in air quality, particularly regarding major industrial sources. Pollutants of concern today come from a variety of sources including mobile (both on road and off road vehicles) sources, large industrial facilities, and smaller industries and business. Delaware continues to use its ambient monitoring network to track changes in air quality across the state and evaluate compliance with ambient air quality standards.

Network Overview

The State of Delaware has established an air monitoring network to determine the ambient levels of the pollutants for which NAAQS have been established. The Delaware Air Monitoring Network consists of the sites and monitors throughout the state, which are listed and described in this document. This network is maintained and operated by the Ambient Monitoring Group of the Division of Air Quality, DNREC.

National Core Monitoring Strategy – NCore

In October 2006 the United States Environmental Protection Agency (EPA) issued final amendments to the ambient air monitoring regulations for criteria pollutants. These amendments are codified in 40 CFR parts 53 and 58. The purpose of the amendments was to enhance ambient air quality monitoring to better serve current and future air quality needs. One of the most significant changes in the regulations was the requirement to establish National Core (NCore) multi-pollutant monitoring stations. These stations provide data on several pollutants at lower detection limits and replace the National Air Monitoring Station (NAMS)

networks that have existed for several years. The final network plan was submitted to EPA on July 1, 2009 and the station was fully operational on January 1, 2011.

The NCore Network addresses the following monitoring objectives:

- timely reporting of data to the public through AirNow, air quality forecasting, and other public reporting mechanisms
- support development of emission strategies through air quality model evaluation and other observational methods
- accountability of emission strategy progress through tracking long-term trends of criteria and non-criteria pollutants and their precursors
- support long-term health assessments that contribute to ongoing reviews of the National Ambient Air Quality Standards (NAAQS)
- compliance through establishing nonattainment/attainment areas by comparison with the NAAQS
- support multiple disciplines of scientific research, including; public health, atmospheric and ecological

The NCore sites must measure, at a minimum, PM_{2.5} particle mass using continuous and integrated/filter-based samplers, speciated PM_{2.5}, PM_{10-2.5} particle mass, O₃, SO₂, CO, NO/NO_y, lead, wind speed, wind direction, relative humidity, and ambient temperature.

Each State is required to operate at least one NCore site. The objective is to locate sites in broadly representative urban (about 50 sites) and rural or regional (about 20 sites) locations throughout the country to help characterize urban- and regional-scale patterns of air pollution. Monitoring agencies are encouraged by EPA to collocate NCore sites with existing sites already measuring ozone precursors, air toxics, or PM_{2.5} speciation components. By combining these monitoring programs at a single location, stakeholders can maximize the multi-pollutant information available. This approach not only leverages existing resources but notably enhances the foundation for future health studies and NAAQS revisions.

In 2009, EPA provided funding to begin the process of establishing an NCore station in Delaware. After evaluating the existing network, historical data, census data, meteorology, and topography, Delaware's proposal for the existing MLK monitoring site as Delaware's NCore site was accepted by EPA.

Delaware's NCore monitoring, including PMcoarse, ozone, and NO_y, became operational on January 1, 2011.

Monitoring Site Network Map and Information

Following is the Delaware ambient air monitoring site network map as of June 2017.



Below is a table with summary information on every SLAMS site in Delaware. Information includes site name and AQS ID, active parameters as of June 2017, the date when each monitor began collecting information, the scale of representativeness for each parameter, the monitoring objective, and any other comments relating to the site or monitor. Street address and geographic coordinates are included for each site in Appendix A.

All monitoring sites that are part of a CBSA/MSA meet the minimum monitoring requirements specified in 40 CFR Part 58 Appendix D.

There are no changes from the 2017 Monitoring Plan.

| Site Name & AQS ID | Parameter | Start Date | Scale of Rep | Objective | Comments |
|-----------------------------|-------------------------|------------|--------------|--|-------------------------------------|
| Killens Pond 10-001-0002 | Ozone | 4/1/1995 | Urban | General/Background | Rural site |
| | PM2.5 | 1/1/1999 | Urban | General/Background | |
| | PM2.5 Continuous FEM | 9/1/2012 | Urban | General/Background | |
| | WSWD | 4/1/1995 | N/A | N/A | |
| Dover 10-001-0003 | PM2.5 | 1/1/1999 | Neighborhood | Population Exposure | |
| Brandywine 10-003-1010 | Ozone | 7/1/1994 | Neighborhood | Population Exposure | Secondary downwind of Wilmington |
| | WSWD | 11/1/2013 | N/A | N/A | |
| Bellefonte2 10-003-1013 | Ozone | 4/1/2001 | Neighborhood | Population Exposure | Primary downwind of Wilmington |
| | SO2 | 3/1/2003 | Neighborhood | Population Exposure | |
| Bellefonte 10-003-1003 | PM2.5 | 1/1/1999 | Neighborhood | Population Exposure | |
| MLK 10-003-2004 | SO2 | 1/1/1999 | Neighborhood | Population Exposure | Urban NCore site |
| | CO | 1/1/1999 | Middle | Population Exposure | |
| | NO2 | 1/1/2001 | Neighborhood | Population Exposure/ Maximum Concentration | |
| | NOy | 1/1/2011 | Neighborhood | Population Exposure/ NCore | |
| | Ozone | 1/1/2011 | Neighborhood | Population Exposure/ NCore | |
| | PM10 | 1/1/2000 | Neighborhood | Population Exposure/ Maximum Concentration | |
| | PM2.5 | 1/1/1999 | Neighborhood | Population Exposure/ Maximum Concentration | |
| | PM2.5 Continuous FEM | 7/1/2007 | Neighborhood | Air Quality Index/Population Exposure | |
| | PMcoarse | 1/1/2011 | Neighborhood | Population Exposure/ NCore | |
| | PM2.5 speciation | 6/1/2001 | N/A | Population Exposure | |
| | BC | 1/1/2001 | N/A | Population Exposure | |
| | VOCs | 1/1/1999 | N/A | Population Exposure | |

| Site Name & AQS ID | Parameter | Start Date | Scale of Rep | Objective | Comments |
|------------------------------|-------------------------|------------|--------------|--|--|
| | Metals | 1/1/2003 | N/A | Population Exposure | |
| | WS/WD | 6/1/2000 | N/A | N/A | |
| | Temp/RH | 1/1/2011 | N/A | N/A | |
| Newark 10-003-1012 | PM2.5 | 12/15/1999 | Neighborhood | Population Exposure | |
| Lums Pond 10-003-1007 | Ozone | 1/1/1992 | Urban | Upwind Background/ Population Exposure | Rural/suburban, upwind of Wilmington during ozone season |
| | SO2 | 1/1/2000 | Urban | General Background/ Population Exposure | |
| | PM2.5 | 1/1/1999 | Urban | Regional Transport/ Population Exposure | |
| | WS/WD | 6/1/2013 | N/A | N/A | |
| Delaware City 10-003-1008 | SO2 | 2/1/1992 | Neighborhood | Population Exposure/ Source Oriented | Point source dominated site |
| | PM2.5 Continuous FEM | 6/1/2013 | Neighborhood | Population Exposure/ Source Oriented | |
| | WS/WD | 5/1/2011 | N/A | N/A | |
| Seaford 10-005-1002 | Ozone | 3/1/1990 | Neighborhood | Population Exposure | |
| | PM2.5 | 1/1/1999 | Neighborhood | Population Exposure | |
| | PM2.5 Continuous FEM | 1/1/2013 | Neighborhood | Population Exposure | |
| | WS/WD | 5/1/2011 | N/A | N/A | |
| Lewes 10-005-1003 | Ozone | 5/1/1997 | Neighborhood | Population Exposure | Coastal site |
| | SO2 | 1/1/2013 | Neighborhood | Population Exposure | |
| | WS/WD | 6/1/1997 | N/A | N/A | |

N/A – not applicable

Criteria Pollutant Network Description by Parameter

Ozone (O₃)

Ozone is measured by ultraviolet absorption photometry. Air is drawn through a sample cell where ultraviolet light (254 nm wavelength) passes through it. Light not absorbed by the ozone is converted into an electrical signal proportional to the ozone concentration.

Monitoring Requirements

Within an O₃ network, at least one O₃ site for each MSA, or CSA if multiple MSAs are involved, must be designed to record the maximum concentration for that metropolitan area. More than one maximum concentration site may be necessary in some areas. Other types of monitoring sites are needed to determine maximum population exposure, background concentrations, and concentrations being transported into an area (boundary conditions). In Delaware, New Castle County is part of the larger Philadelphia CSA, Kent County is covered by the Dover MSA, and Sussex County is part of the Salisbury MSA.

Number of Ozone SLAMS Sites Required (based on Table D-2 , Appendix D to 40 CFR Part 58, Ozone minimum monitoring requirements)

| MSA Name | County in Delaware | Population | DE Monitors | Total Required Monitors |
|--|--------------------|------------|-------------|-------------------------|
| Philadelphia-Camden-Wilmington- Newark, PA-DE-MD | | 6,018,800 | | 3 |
| | New Castle | 538,479 | 4 | |
| Dover, DE | Kent | 162,310 | 1 | 1 |
| Salisbury, MD-DE | | 381,868 | | 1 |
| | Sussex | 197,145 | 2 | |
| Total in DE | | | 7 | |

The appropriate spatial scales for O₃ sites are neighborhood, urban, and regional. Since O₃ requires appreciable formation time, the mixing of reactants and products occurs over large volumes of air, and this reduces the importance of monitoring for small scale spatial variability.

The prospective maximum concentration monitor site should be selected in a direction from the city that is most likely to observe the highest O₃ concentrations, more specifically, downwind during periods of photochemical activity. Since O₃ levels decrease significantly in the colder parts of the year in many areas, O₃ is required to be monitored only during the “ozone season” as designated in the 40 CFR Part 58 Appendix D, which in Delaware is March 1 through October 31.



Delaware operates seven ozone monitoring sites, including sites for population exposure, background concentrations, upwind and downwind directions for the Wilmington area, and NCore monitoring. Monitoring objectives for each site are included in the detailed site description section of this document. The monitors began operating year-round in 2011 although the official EPA ozone monitoring season for Delaware runs from April through October.

Hourly data is sent to the AirNow website to generate the daily Air Quality Index and to be used in mapping ozone concentrations throughout the region.

Operation of all ozone monitors in Delaware meets the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable.

Ozone Design Values

The table below shows the most recent (2015 – 2017) design value for each ozone monitor in Delaware. Ozone design values are calculated by taking the 3-year average of the annual 4th maximum daily maximum 8-hr ozone averages. The 8-hr ozone standard established in 2015 is 0.070 ppm.

Ozone 8-hour design values in ppm, 2015 – 2017.

| Site | Design Value in ppm |
|--------------|---------------------|
| Brandywine | 0.074 |
| Bellefonte2 | 0.071 |
| Lums Pond | 0.067 |
| Killens Pond | 0.066 |
| Seaford | 0.065 |
| Lewes | 0.067 |
| MLK NCore | 0.072 |

Sulfur Dioxide (SO₂)

Sulfur dioxide is measured with a fluorescence analyzer. Air is drawn through a sample cell where it is subjected to high intensity ultraviolet light. This causes the sulfur dioxide molecules in the air to fluoresce and release light. The fluorescence is detected with a photo multiplier tube and converted to an electrical signal proportional to the SO₂ concentration.

Monitoring Requirements

On June 2, 2010, EPA strengthened the primary National Ambient Air Quality Standard (NAAQS) for sulfur dioxide (SO₂). The primary SO₂ standard was revised by establishing a new 1-hour standard at a level of 75 parts per billion (ppb). The new form of the standard is the 3-year average of the 99th percentile of the annual distribution of daily maximum 1-hour average concentrations.

EPA also revised the ambient air monitoring requirements for SO₂. For Delaware, the new standard requires one additional monitoring site be established in Sussex County. New monitors needed to meet the network design regulations for the new 1-hour SO₂ standard had to be sited and operational by January 1, 2013 in accordance with the requirements of 40 CFR Part 58 Appendix D. Delaware complied with this requirement by adding a monitor in Sussex County to fulfill the requirement for monitoring in the Sussex County portion of the Salisbury metropolitan statistical area (MSA).



On August 10, 2015, the U.S. Environmental Protection Agency initialized requirements for air agencies to monitor or model ambient sulfur dioxide (SO₂) levels in areas with large sources of SO₂ emissions to help implement the 1-hour SO₂ National Air Ambient Quality Standard (NAAQS). This final rule established that, at a minimum, air agencies must characterize air quality around sources that emit 2,000 tons per year (tpy) or more of SO₂. Delaware has determined that there are no sources within the state above this threshold emissions total.

EPA also made changes to data reporting requirements for SO₂. State and local agencies are now required to report two data values for every hour of monitoring conducted:

- the 1-hour average SO₂ concentration; and
- the maximum 5-minute block average SO₂ concentration of each hour.

More detailed information on the new SO₂ standard and monitoring requirements can be found on the EPA website at <http://www3.epa.gov/airquality/sulfurdioxide/implement.html>

Delaware currently operates four SO₂ monitoring sites in New Castle County, which operate year-round. The fifth site in Sussex County became operational as a SPM in late summer 2012 and a SLAMS on January 1, 2013. Operation of all SO₂ monitors in Delaware meets the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable.

SO₂ design values for 2015 – 2017: 3-year average of 98th percentile 1-hour averages

| Site | Design Value in ppb |
|---------------|---------------------|
| Bellefonte2 | 7* |
| MLK NCore | 6 |
| Delaware City | 10 |
| Lums Pond | 8* |
| Lewes | 3 |

*Does not meet completeness criteria

Carbon Monoxide (CO)

Carbon monoxide is measured by infrared absorption photometry. Air is drawn continuously through a sample cell where infrared light passes through it. Carbon monoxide molecules in the air absorb part of the infrared light, reducing the intensity of the light reaching a light sensor. The light is converted into an electrical signal related to the concentration of carbon monoxide in the sample cell.



Monitoring Requirements

EPA revised the minimum number of required CO monitoring sites on August 12, 2011. Since Delaware does not operate a near-road urban monitoring site with a population of 1 million or more and does not have a Photochemical Air Monitoring Site (PAMS), Delaware is only required to monitor CO at its urban NCore MLK monitoring site in Wilmington. For the larger Philadelphia-Camden-Wilmington-Newark, PA-DE-MD MSA, the requirements are met by monitors installed in the urban Philadelphia area.

Operation of the CO monitor at the MLK site meets the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable. The CO values are well below the ambient standards and close to the minimum detectable limits of the monitor.

Nitrogen Dioxide (NO₂)

Nitrogen oxides are measured using the chemiluminescence reaction of nitric oxide (NO) with ozone (O₃). Air is drawn into a reaction chamber where it is mixed with a high concentration of ozone from an internal ozone generator. Any NO in the air reacts with the ozone to produce NO₂. Light emitted from this reaction is detected with a photo multiplier tube and converted to an electrical signal proportional to the NO concentration. NO₂ must be measured indirectly. NO_x is measured by passing the air through a converter where any NO₂ in the air is reduced to NO before the air is passed to the reaction chamber. By alternately passing the air directly to the reaction chamber, and through the converter before the reaction chamber, the analyzer alternately measures NO and NO_x. The NO₂ concentration is equal to the difference between NO and NO_x.

Monitoring Requirements

On January 22, 2010, EPA strengthened the health-based National Ambient Air Quality Standard (NAAQS) for nitrogen dioxide (NO₂). EPA set a new 1-hour NO₂ standard at the level of 100 parts per billion (ppb). The form for the 1-hour NO₂ standard is the 3-year average of the 98th percentile of the annual distribution of daily maximum 1-hour average concentrations. EPA also retained, with no change, the current annual average NO₂ standard of 53 ppb.



On March 14, 2013, EPA published revised monitoring requirements for NO₂. Monitoring for NO₂ is now required at near road sites in CBSAs with populations greater than 500,000, in CBSAs with

populations greater than 1 million, and at NCore sites. In accordance with the new rule, Delaware is required to monitor NO₂ only at its NCore MLK site in Wilmington. For the larger Philadelphia-Camden-Wilmington-Newark, PA-DE-MD MSA, the requirements are met by monitors installed by the Pennsylvania Department of Environmental Protection (PADEP).

The 2015-2017 one hour NO₂ design value based on the MLK monitor data is 46 ppb.

Operation of all NO₂ monitors in Delaware meets the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable.

More detailed information on the new NO₂ standard and monitoring requirements can be found on the EPA website at <http://www3.epa.gov/airquality/nitrogenoxides/actions.html#oct12>

Total Reactive Oxides of Nitrogen (NO_y)

Oxides of Nitrogen are measured using the chemiluminescence reaction of nitric oxide (NO) with ozone (O₃). Air is drawn into a reaction chamber where it is mixed with a high concentration of ozone from an internal ozone generator. Any NO in the air reacts with the ozone to produce NO₂. Light emitted from this reaction is detected with a photo multiplier tube and converted to an electrical signal proportional to the NO concentration. NO_(Diff) must be measured indirectly. NO_y is measured by passing the air through a converter that is mounted 10 meters from ground level. Reactive Oxides of Nitrogen in the air are reduced to NO in the convertor before the air is passed to the reaction chamber. By alternately passing the air directly to the reaction chamber, and through the converter before the reaction chamber, the analyzer alternately measures NO and NO_y. The NO_(Diff) concentration is equal to the difference between NO and NO_y.

On January 1, 2011 NO_y monitoring began at the MLK site as part of the NCore program. Operation of all NO_y monitors in Delaware meets the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable.


Particulate Matter - Fine (PM_{2.5})

The federal reference method (FRM) monitors for PM_{2.5} operate by drawing air through a specially designed inlet that excludes particles larger than 2.5 microns in diameter. The particles are collected on a Teflon⁷ microfiber filter that is weighed to determine the particulate mass.

Monitoring Requirements

State agencies must operate at least the minimum number of required PM_{2.5} sites listed in 40 CFR Part 58 Appendix D Table D-5. These required monitoring stations or sites must be sited to represent community-wide air quality. In addition, the following specific criteria apply:

- (1) At least one monitoring station is to be sited in a population-oriented area of expected maximum concentration.
- (2) For areas with more than one required station, a monitoring station is to be sited in an area of poor air quality.
- (3) Each State shall install and operate at least one PM_{2.5} site to monitor for regional background and at least one PM_{2.5} site to monitor regional transport.

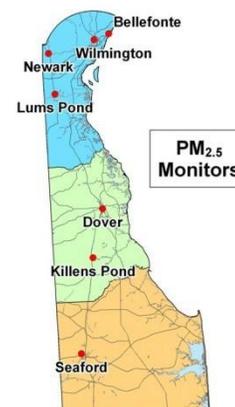

Number of PM_{2.5} SLAMS Sites Required (based on Table D-5 , Appendix D to 40 CFR Part 58, PM_{2.5} minimum monitoring requirements)

| MSA Name | County in Delaware | Population | Design Value Daily/Annual NAAQS: 35/15.0 | DE Monitors | Total Required Monitors |
|---|--------------------|------------|--|-------------|-------------------------|
| Philadelphia-Camden-Wilmington-Newark, PA-DE-MD | | 6,018,800 | 29/12.3 | | 3 |
| | New Castle | 538,479 | 25/9.6 | 4 | |
| Dover, DE | Kent | 162,310 | 21/8.1 | 2 | |
| Salisbury, MD-DE | | 381,868 | | | 0 |
| | Sussex | 197,145 | 21/8.4 | 1 | |
| Total in DE | | | | 7 | |

Based on tables available at <http://www.epa.gov/airtrends/values.html>.

Delaware operates more than the minimum number of required PM_{2.5} monitors at seven sites throughout the state. All monitors operate year-round. There is one collocated site at MLK in Wilmington. The normal sampling schedule is 24 hours every third day, however, at MLK samples are collected every day.

Operation of all PM_{2.5} monitors in Delaware meets the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable.

PM_{2.5} Chemical Speciation

Chemical speciation is encouraged at sites where the chemically resolved data would be useful in developing State implementation plans and supporting atmospheric or health effects related

studies. The sites in Delaware were established at MLK in Wilmington and Dover in Kent County.

In 2014 EPA completed the process of assessing the national speciation network. The purpose of the assessment was to create a network that is sustainable going forward with the current situation of reduced federal funding by redistributing resources to new or high priorities from those of low-priority or low-benefit. As part of this process EPA developed a scoring metric to identify existing speciation sites of lower value for defunding, and the Dover site was identified as low-value due to redundancy. Speciation monitoring at the Dover site therefore ended in 2014 in response to termination of support from the EPA. Speciation monitoring continues at the MLK site in Wilmington on a 1-in-three day schedule.

Continuous PM_{2.5}

Delaware operates a designated FEM continuous PM_{2.5} monitor for hourly and 24-hour data at the MLK, Killens Pond, and Seaford sites. These monitors operate year-round, and are collocated with an FRM PM_{2.5} monitor. In 2013 Delaware added another FEM continuous PM_{2.5} monitor to the Delaware City site which operated as a SPM monitor through 2015, and was designated as a SLAMS beginning on January 1, 2016.

Correlation of continuous PM_{2.5} FEM data with collocated FRM data: Under the most recent revisions to the 40 CFR, Part 50, Appendix N data handling requirements, the data capture requirement for annual and daily Design Values is 75% of scheduled samples per quarter. “Creditable” data includes all PM_{2.5} data from scheduled sampling days, valid make-ups and collocated suitable monitors. This data is acceptable for comparison to the annual and daily NAAQS and computations are based on a “combined site record”. “Suitable” monitors are all monitors designated as either FRM or FEM. (Note: This does not include specific continuous FEMs disqualified by the monitoring agency in the annual network plan and approved by the EPA Regional Administrator. Delaware has not disqualified any continuous FEM monitors.) The PM_{2.5} data from the designated primary monitor is therefore supplemented with the average of daily data from all collocated “suitable” monitors, including continuous FEM monitors, for any missing primary monitor days.

PM_{2.5} Design Values (2015 – 2017)

Below are the design values for PM_{2.5} using 2015 through 2017 data. PM_{2.5} annual design values are calculated using the 3-year average of the respective annual averages. The current annual PM_{2.5} standard is 12 µg/m³. PM_{2.5} daily design values are calculated using the 3-year average of the annual 98th percentile values. The daily PM_{2.5} standard is 35 µg/m³.

| Site | Annual Design Value µg/m ³ | Daily Design Value µg/m ³ |
|---------------------|--|---|
| Bellefonte | 7.7 | 21 |
| MLK – Wilmington | 8.5 | 21 |
| Newark | 8.3 | 22 |
| Rte 9/Delaware City | 8.0 | 18 |

| | | |
|--------------|-----------|-----------|
| Lums Pond | 7.6 | 18 |
| Dover | 7.1 | 17 |
| Killens Pond | 7.0 | 17 |
| Seaford | 7.3 | 17 |
| NAAQS | 12 | 35 |

*At least one year has less than 75% data completeness.

Currently, all Delaware monitors are measuring attainment for both the annual and daily PM_{2.5} standards.

Particulate Matter (PM₁₀)

PM₁₀ is sampled using the federal reference method (FRM) monitor similar to PM_{2.5} that operates by drawing air through a specially designed inlet that excludes particles larger than 10 microns in diameter. The particles are collected on a Teflon 7 microfiber filter that is weighed to determine the particulate mass.

Monitoring Requirements

State, and where applicable local, agencies must operate the minimum number of required PM₁₀ monitoring sites listed in Table D-4 of 40 CFR Part 58 Appendix D. For the Philadelphia-Camden-Wilmington-Newark, PA-DE-MD MSA, the requirements are met by monitors installed in the Philadelphia urban area. No other PM₁₀ monitors are required in Delaware.

Although microscale monitoring may be appropriate in some circumstances, the most important spatial scales to effectively characterize the emissions of PM₁₀ from both mobile and stationary sources are the middle scales and neighborhood scales.

Delaware operates one PM₁₀ monitor at MLK in Wilmington to calculate the PM_{coarse} concentrations; therefore the PM₁₀ data is reported at Local, not Standard, temperature and pressure for consistency with the PM_{2.5} collocated data.



Particulate Matter (PM_{coarse})

PM_{coarse} is calculated as the difference between concentrations of PM₁₀ and PM_{2.5} at collocated monitors. PM_{coarse} is part of the NCore monitoring at the Wilmington MLK site. Monitoring began on January 1, 2011. There are no ambient air quality standards for PM_{coarse}.

Operation of all PM₁₀ and PM_{coarse} monitors in Delaware meet the requirements of 40 CFR Part 58 appendices A, C, D, and E as applicable.

Air Toxics Pollutant Monitors

Toxic air pollutants, also called air toxics or hazardous air pollutants are pollutants that are known or suspected to cause cancer or other serious health effects, such as reproductive effects or birth defects, or adverse environmental effects.

As part of the EPA Region III Cooperative Toxic Monitoring Program, Delaware operates one air toxic monitoring station to assess general urban levels. Toxics are sampled every sixth day year-round at the MLK site in Wilmington. The compounds measured are shown in the Monitoring Method table.

The two main classes of air toxics compounds currently monitored in Delaware are volatile organic compounds (VOCs) and heavy metals. VOC samples are collected for 24 hours in canisters with a XonTech 910A canister sampler. The canisters are returned to the Maryland Department of the Environment laboratory for analysis on an Entech/Agilent gas chromatograph mass spectrometer system.

The heavy metals are collected for 24 hours on a total suspended particulate quartz filter which is sent to the West Virginia Department of Environmental Protection laboratory for analysis using Inductively Coupled Plasma/Mass Spectrometry (ICP/MS). Results of the monitoring are submitted to the national Air Quality System (AQS) database.

Delaware previously included carbonyl monitoring as part of the EPA Region III program but monitoring ended in 2015 due to problems with data quality and aging monitoring equipment.

No changes to the program are planned for 2018.

Photochemical Assessment Monitoring System (PAMS) Monitors

The Clean Air Act (CAA) of 1990, Section 182 (c)(1), required the EPA to promulgate rules for enhanced monitoring of O₃, NO_x, and volatile organic compounds (VOCs) for O₃ nonattainment areas based on their classification with the goal of obtaining more comprehensive and representative data on O₃ air pollution.

The following information is taken (and condensed) from the document “PAMS Required Quality Assurance Implementation Plan”, U.S. Environmental Protection Agency, October 2016.

In 2011, the EPA initiated an effort to re-evaluate the PAMS requirements in light of changes in the needs of PAMS data users and the improvements in monitoring technology. The EPA consulted with the Clean Air Science Advisory Committee (CASAC), Air Monitoring and Methods Subcommittee (AMMS) to seek advice on potential revisions to the technical and regulatory aspects of the PAMS program, including changes to required measurements and associated network design requirements. The EPA also requested advice on appropriate technology, sampling frequency, and overall program objectives in the context of the most recently revised O₃ NAAQS and changes to atmospheric chemistry that have occurred over the previous 10 to 15 years in the significantly impacted areas.

Based on the findings of the PAMS evaluation and the consultations with the CASAC AMMS and NACAA MSC, the EPA proposed to revise several aspects of the PAMS monitoring requirements. The current objective of the PAMS air monitoring program is to provide data to evaluate and support the development of air quality models and track trends in ozone precursor concentrations so as to aid ongoing efforts to attain the ozone NAAQS.

Network Design - The first part of the network design change involved EPA requiring PAMS measurements minimally during the PAMS (summer) sampling season, which is June 1 through August 31, at all NCore sites in Core-Based Statistical Areas (CBSAs) with a population of 1,000,000 people or more. The final network design will result in approximately 40 “Required” PAMS sites,

The new regulations specify that the following parameters will be measured at PAMS Required sites:

- **Volatile organic compounds (VOCs)** – It is strongly suggested that all Required PAMS sites take hourly speciated VOC measurements with auto-gas chromatographs (GCs).
- **Carbonyls** - All Required PAMS sites will conduct carbonyl sampling with a frequency of three 8-hour samples on a one-in-three-day basis (~90 samples per PAMS sampling season).
- **Nitrogen Oxides** - All Required PAMS sites must monitor for NO and NO_y (total oxides of nitrogen) in addition to true NO₂, where the latter must be measured with a cavity attenuated phase shift (CAPS) spectroscopy direct-reading NO₂ instrument or a photolytic-converter NO_x analyzer.

- **Meteorology Measurements** - All Required PAMS sites must measure wind speed and direction, temperature, humidity, atmospheric pressure, precipitation, solar radiation, ultraviolet radiation, and mixing height. A ceilometer will be used to determine the height of a cloud ceiling or cloud base (mixing height).

As part of the Philadelphia CBSA and OTR Delaware is required to establish a PAMS site at the NCore site in Wilmington (MLK AQS ID 10-003-2004). As part of the PAMS network, the following measurements are required:

1. Hourly speciated VOC measurements with auto-GCs
2. Carbonyl sampling (three 8-hour samples on a one-in-three-day sampling frequency)
3. NO, true NO₂, and NO_y measurements
4. Surface meteorology measurements including mixing height

Planned equipment is included in Appendix A. Purchasing of equipment began in 2017 in order to meet the goal of initial installation and preliminary data collection by August 2018.

Enhanced Monitoring Program (EMP) - for OTR states

States in the Ozone Transport Region (OTR) states are required by 40CFR Part 58 Appendix D to submit a plan for an enhanced monitoring program by October 1, 2019. Delaware will submit an EMP plan on schedule based on availability of funding and appropriate resources.

Summary of Changes from 2017

Following are the changes from the monitoring network in 2017:

- No changes from 2017.

Changes anticipated for 2018-2019

Following are the changes anticipated to occur in 2018:

- Delaware plans to replace most of the FRM and existing FEM PM_{2.5} monitors with new continuous FEM monitors (Teledyne T-API 640 at 5.0 lpm). At the time of this writing, we estimate that replacement of all FRM and FEM monitors located at monitoring shelters should be completed by the end of 2018, but the specific timetable has not yet been developed. The stand-alone FRM monitors (Bellefonte 10-003-1003, Newark 10-003-1012, and Dover 10-001-0003) will be replaced last since the new FEM monitors must have stand-alone monitor enclosures and wireless modem communications that have not yet been installed. When Delaware proceeds with the FRM/FEM replacement, Delaware will comply with all relevant EPA collocation and other siting and data handling requirements for the new FEM continuous monitors. FRM monitoring will continue at the NCore site at MLK in Wilmington.


Detailed Site Descriptions

The following pages contain additional site specific information on all active SLAMS monitoring sites in Delaware. Sites are shown in alphabetical order for New Castle, Kent, and Sussex Counties.

Site: Bellefonte and Bellefonte2

| | | | | |
|----------------|---|-------------------------|---|---|
| County: | New Castle | Latitude: | Bellefonte 39.7613 Bellefonte2 39.7739 |  |
| Address: | Bellefonte: River Road Park Bellefonte2: Bellevue State Park | Longitude: | Bellefonte -75.4920 Bellefonte2 -75.4965 | |
| AQS site ID: | Bellefonte: 10-003-1003 Bellefonte2: 10-003-1013 | Year Established: | Bellefonte 1969 Bellefonte2 2001 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Philadelphia-Camden-Wilmington PA-NJ-DE-MD | |

Bellefonte and Bellefonte2 locations

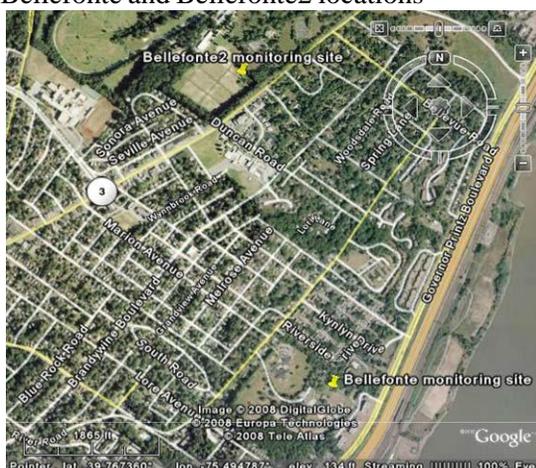

Bellefonte2



Monitored Parameters

| | Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
|-------------|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| Bellefonte | | | | | X | | | | | |
| Bellefonte2 | X | X | | | | | | | | |


Site Description: Bellefonte was originally established in 1969 to monitor O₃ (primary downwind direction from Wilmington) and SO₂. PM_{2.5} was added in 1999. When changing site characteristics began to interfere with ozone monitoring, a new site (Bellefonte2) was established in 2001, less than a mile to the north. The O₃ and SO₂ monitors were relocated to the new site, while the PM_{2.5} monitor remained at the original site to provide data continuity. Both sites meet all EPA siting criteria.

Monitoring Objectives: Both monitoring sites are neighborhood scale, and collect data to determine compliance with the NAAQS, to determine population exposures, and to track trends. Bellefonte2 is the O₃ maximum downwind concentration site for Wilmington. The SO₂ monitor is sited for general population exposure and trends, with major point sources located to the northeast in Marcus Hook, PA and to the south in Edgemoor.

Planned Changes through 2018: No changes planned. 2019: replace existing PM_{2.5} FRM with new PM_{2.5} FEM.

Site: Brandywine

| | | | | |
|----------------|-----------------------------|-------------------------|---|---|
| County: | New Castle | Latitude: | 39.8172 |  |
| Address: | Brandywine Creek State Park | Longitude: | -75.5639 | |
| AQS site ID: | 10-003-1010 | Year Established: | 1994 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Philadelphia-Camden-Wilmington PA-NJ-DE-MD | |

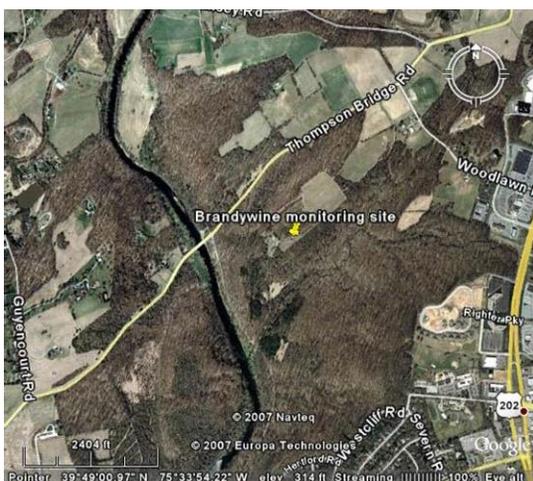

Monitored Parameters

| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| X | | | | | | | | X | X |

| |
|---|
| <p>Site Description: The Brandywine site is located in Brandywine Creek State Park, and was established when a secondary downwind site in Claymont was discontinued to changes in nearby land use and ownership. This is a neighborhood scale site for O₃ monitoring. The site meets all EPA siting requirements. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.</p> |
| <p>Monitoring Objectives: The Brandywine site is in the secondary downwind direction from Wilmington. The objectives are population exposure, compliance with the O₃ NAAQS, and trends.</p> |
| <p>Planned Changes through 2018: No changes planned.</p> |

Site: Delaware City

| | | | | |
|----------------|------------------------|-------------------------|---|---|
| County: | New Castle | Latitude: | 39.5777 |  |
| Address: | Route 9, Delaware City | Longitude: | -75.6036 | |
| AQS site ID: | 10-003-1008 | Year Established: | 1992 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Philadelphia-Camden-Wilmington PA-NJ-DE-MD | |



Monitored Parameters

| | | | | | | | | | |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
| | X | | | | | X | | X | X |


Site Description: The Delaware City site was established at a location along Route 9 that is between the Delaware City industrial complex and the nearest populated area (Delaware City) in the predominant downwind direction. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.

Monitoring Objectives: This monitoring site is a stationary source-impacted site for SO₂. The monitoring objectives are population exposure, compliance with the NAAQS, and trends.

Planned Changes through 2018: No major changes; replace existing PM_{2.5} FEM with new PM_{2.5} FEM.

Site: Lums Pond

| | | | | |
|----------------|----------------------|-------------------------|----------------------|---|
| County: | New Castle | Latitude: | 39.5513 |  |
| Address: | Lums Pond State Park | Longitude: | -75.7320 | |
| AQS site ID: | 10-003-1007 | Year Established: | 1991 | |
| Spatial Scale: | Urban | Area Represented (MSA): | Not in an urban area | |

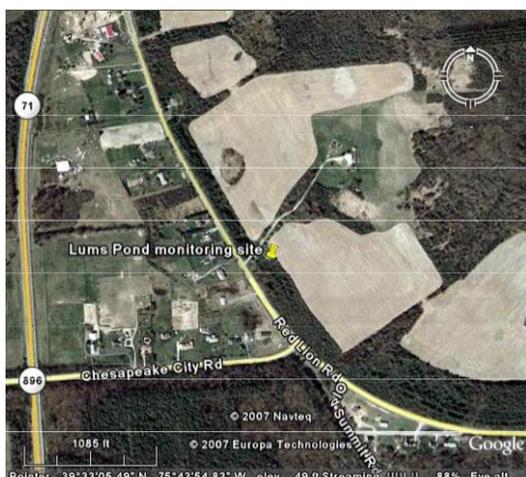

Monitored Parameters

| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| X | X | | | X | | | | X | X |

Site Description: The Lums Pond site is a neighborhood scale site located in a general upwind direction from Wilmington. The immediate area is rural. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.

Monitoring Objectives: The site objectives for O₃ are upwind background for the Wilmington area, population exposure, NAAQS compliance, and trends. This site was originally planned to monitor O₃ transported into Delaware from the Baltimore/Washington area, and continues to serve this purpose. The SO₂ monitor was added 2000 to detect impacts from major point sources directly to the east. PM_{2.5} monitoring began in 1999 as both a regional transport and general population exposure site, as well as for NAAQS compliance. The scale of representation was changed to Urban (4 – 50 km) to reflect the background and transport monitoring objectives.

Planned Changes through 2018: No major changes; replace existing PM_{2.5} FRM with new continuous PM_{2.5} FEM.

Site: MLK

| | | | | |
|----------------|---------------------------|-------------------------|--|---|
| County: | New Castle | Latitude: | 39.7395 |  |
| Address: | Justison St. and MLK Blvd | Longitude: | -75.5575 | |
| AQS site ID: | 10-003-2004 | Year Established: | 1999 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Philadelphia- Camden- Wilmington PA- NJ- DE-MD | |



Monitored Parameters



| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction | NO/NO _y | Lead | PM _{10-2.5} | VOCs | Metals | Black Carbon | Temp & Rel. Hum. |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|--------------------|------|----------------------|------|--------|--------------|------------------|
| X | X | X | X | X | X | X | X | X | X | X | | X | X | X | X | X |


Site Description: The MLK site is located in Wilmington at the intersection of Justison St. and MLK Blvd. It replaced another urban site at 12th and King Streets that had operated at that location for over 20 years and was discontinued due to a change in land ownership. The MLK site is the state NCore site and represents urban population exposure to multiple pollution sources. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.

Monitoring Objectives: Monitoring objectives are population exposure, maximum concentration, NAAQS compliance, NCore, and trends.

Planned Changes through 2018: Begin preliminary PAMS monitoring before the end of 2018.

Site: Newark

| | | | | |
|----------------|-------------------------------------|-------------------------|--|---|
| County: | New Castle | Latitude: | 39.6919 |  |
| Address: | University of Delaware North Campus | Longitude: | -75.7617 | |
| AQS site ID: | 10-003-1012 | Year Established: | 1999 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Philadelphia- Camden- Wilmington PA- NJ- DE-MD | |

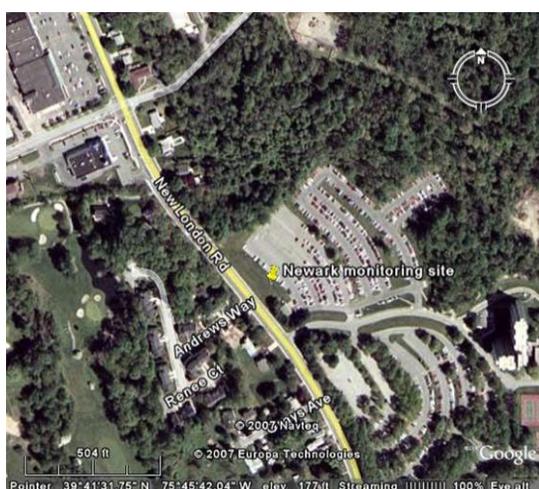

Monitored Parameters

| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| | | | | X | | | | | |


Site Description: The Newark site is a platform only and was established to understand PM_{2.5} concentrations in the Newark area and potentially transported PM_{2.5} from upwind areas to the west. It is a PM_{2.5} neighborhood scale site. The location is suburban and generally impacted by mobile sources and regional transport. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.

Monitoring Objectives: The objectives are population exposure, NAAQS compliance, regional transport, and trends.

Planned Changes through 2018: No changes planned. 2019: replace existing PM_{2.5} FRM with new continuous PM_{2.5} FEM.

Site: Dover

| | | | | |
|----------------|--------------|-------------------------|----------|---|
| County: | Kent | Latitude: | 39.1556 |  |
| Address: | Water St. | Longitude: | -75.5182 | |
| AQS site ID: | 10-001-0003 | Year Established: | 1999 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Dover | |

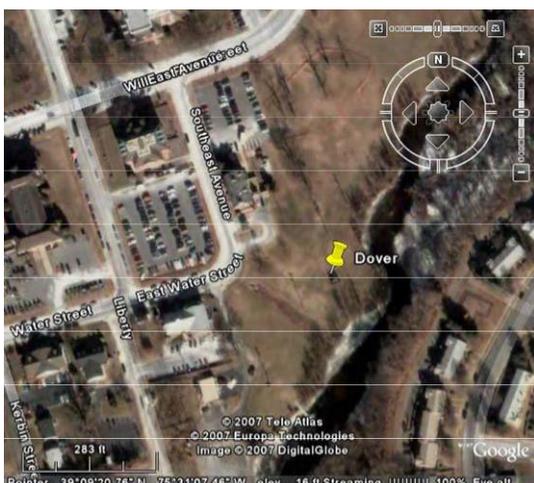

Monitored Parameters

| | | | | | | | | | |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
| | | | | X | | | | | |


Site Description: The Dover site is a platform only and was established to understand fine particulate concentrations in the Dover area as well as speciated components of fine particulate. It is a neighborhood scale site representative of the Dover MSA, and is impacted by a combination of source types including mobile, large and small point sources. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.

Monitoring Objectives: The monitoring objectives are population exposure, NAAQS compliance, and trends.

Planned Changes through 2018: No changes planned. 2019: replace existing PM_{2.5} FRM with new continuous PM_{2.5} FEM.

Site: Killens Pond

| | | | | |
|----------------|------------------|-------------------------|----------------------|---|
| County: | Kent | Latitude: | 38.9867 |  |
| Address: | Killens Pond Rd. | Longitude: | -75.5568 | |
| AQS site ID: | 10-001-0002 | Year Established: | 1995 | |
| Spatial Scale: | Urban | Area Represented (MSA): | Not in an urban area | |

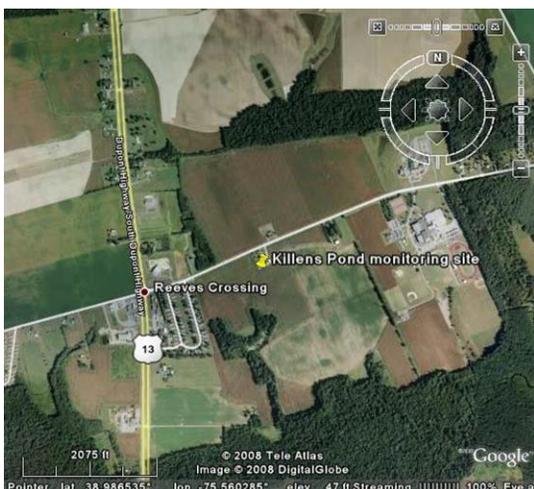


Monitored Parameters

| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| X | | | | X | | X | | X | X |

| |
|---|
| <p>Site Description: The Killens Pond site is located in a rural area that is part of Killens Pond State Park. It was established to understand background concentrations of ozone and PM_{2.5}. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.</p> |
| <p>Monitoring Objectives: The objectives for this site are background concentrations, NAAQS compliance, and trends. The scale of representation was changed to Urban (4 – 50 km) to reflect the background monitoring objective.</p> |
| <p>Planned Changes through 2018: No major changes; replace PM_{2.5} FEM with new continuous PM_{2.5} FEM.</p> |

Site: Lewes

| | | | | |
|----------------|--|-------------------------|-----------------|---|
| County: | Sussex | Latitude: | 38.7791 |  |
| Address: | University of Delaware College of Marine Studies | Longitude: | -75.1632 | |
| AQS site ID: | 10-005-1003 | Year Established: | 1997 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Salisbury MD-DE | |

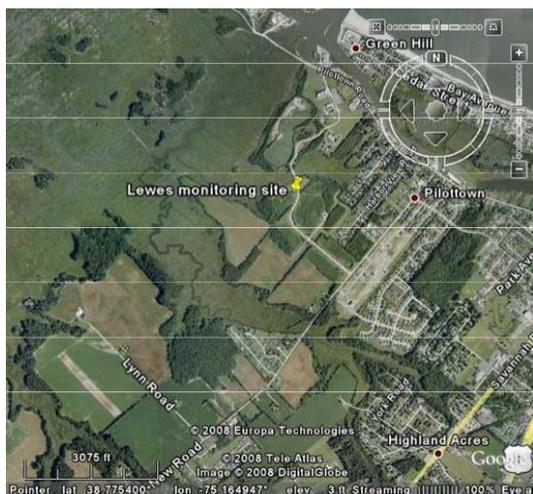


Monitored Parameters

| | | | | | | | | | |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
| X | X | | | | | | | X | X |

| |
|---|
| <p>Site Description: The Lewes site is neighborhood scale, and was established to understand ozone concentrations in the coastal area where population increases significantly in the summer months. SO₂ was added in 2012 in response to the new SO₂ NAAQS monitoring requirements. It is near the University of Delaware College of Marine Studies campus in Lewes, and is representative of the coastal Sussex County area. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.</p> |
| <p>Monitoring Objectives: The objectives include population exposure, NAAQS compliance, and trends.</p> |
| <p>Planned Changes through 2018: No changes planned. For 2019 may be part of EMP.</p> |

Site: Seaford

| | | | | |
|----------------|-------------------|-------------------------|-----------------|---|
| County: | Sussex | Latitude: | 38.6539 |  |
| Address: | 350 Virginia Ave. | Longitude: | -75.6106 | |
| AQS site ID: | 10-005-1002 | Year Established: | 1990 | |
| Spatial Scale: | Neighborhood | Area Represented (MSA): | Salisbury MD-DE | |

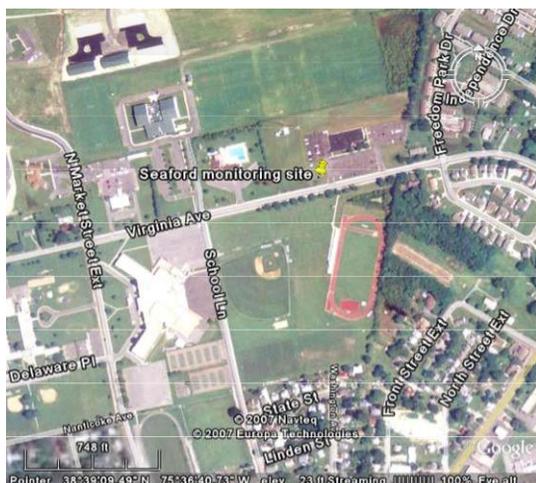

Monitored Parameters

| Ozone | SO ₂ | CO | NO ₂ | PM _{2.5} | PM _{2.5} speciation | PM _{2.5} continuous | PM ₁₀ | Wind Speed | Wind Direction |
|-------|-----------------|----|-----------------|-------------------|------------------------------|------------------------------|------------------|------------|----------------|
| X | | | | X | | X | | X | X |

Site Description: The Seaford site was originally located to monitor pollutant concentrations in the Seaford area. The original site was located further south, near the Seaford water tower. It was relocated to the present location in 1990 due to deteriorating conditions at the original site. The current site is neighborhood scale and is suburban. The site is impacted by local point sources, mobile sources, and regional transport. This site meets all EPA 40 CFR Part 58 App D and E siting criteria.

Monitoring Objectives: The site objectives are population exposure, NAAQS compliance, and trends.

Planned Changes through 2018: No major changes; replace PM_{2.5} FRM with new continuous PM_{2.5} FEM.

Monitoring method information

Monitoring methods and associated AQS codes used in the Delaware ambient air monitoring network:

| Parameter AQS code | AQS Method Code | Method Description/ Analysis Method |
|--|--|---|
| O3 - 44201 | 047 – TE 49i 087 – API T400 Teledyne | UV Absorption |
| SO2 - 42401 | 560 - TE 43i-TLE | UV Fluorescence |
| CO - 42101 | 554 – TE 48i-TLE 593 – TAPI Trace CO | Non-dispersive Infrared |
| NO2 - 42602 | 574 – TE 42i-TL 599 –TAPI T200 NO, NOx 600 –TAPI T200 NO2 | Chemiluminescence |
| NOy - 42600 | 674 – TE 42i-Y NOy | Chemiluminescence |
| PM _{2.5} - 88101 | 145 – TE Partisol 2025 VSCC Inlet 184 – TE SHARP 5030i FEM (continuous) 236 – Teledyne T640 | Gravimetric Beta-attenuation/Nephelometer Continuous broadband spectroscopy |
| PM _{2.5} Speciation – Ions* | 812 – Met One SASS | Nylon filter, Ion chromatography |
| PM _{2.5} Speciation – Carbon* | 839 – URG 3000N | Quartz filter and cyclone inlet; IMPROVE carbon Thermal Optical Reflectance (TOR) analysis method |
| PM _{2.5} Speciation – Metals* | 811 – Met One SASS | Teflon filter, energy dispersive XRF |
| PM10 – 85129 local conditions | 127 – TE Partisol 2025 Sequential | Gravimetric |
| PMcoarse – 86101 PM10-2.5 local conditions | 176 – TE Partisol 2025 Sequential Pair | Calculated from paired samplers |
| Lead – 85129 PM10 local conditions | 811 – TE Partisol 2025 Sequential | X-ray fluorescence, low-volume PM10 sampler |
| Air Toxics – VOCs* | 150 – SS 6L – Pressurized Canister | Cryogenic pre-concentration: GC/MS |
| Air Toxics – Metals * | 089 – High-Volume TSP | ICP/MS Quartz filters |
| WS/WD | 020 – Vaisala vector method | Ultrasonic |

* Multiple parameters in this group; see next table for list of compounds.

| Group | Compounds |
|---|--|
| VOCs | Dichlorodifluoromethane, Chloromethane, 1,2-Dichloro-1,1,2,2-tetrafluoroethane, Chloroethene, 1,3-Butadiene, Trichlorofluoromethane, Acetone, Methylene Chloride, 1,1,2-Trichloro-1,2,2-trifluoroethane, 2-methoxy-2-methyl-Propane, Hexane, Chloroform, Tetrahydrofuran, 1,2-Dichloroethane, 1,1,1-Trichloroethane, Benzene, Carbon tetrachloride, Cyclohexane, 1,2-Dichloropropane, Trichloroethene, Heptane, Cis-1,3-Dichloro-1-Propene, Trans-1,3-Dichloro-1-Propene, Toluene, 1,2-Dibromoethane, Tetrachloroethylene, Chlorobenzene, Ethylbenzene, m & p- Xylene, Styrene, 1,1,2,2-Tetrachloroethane, o-Xylene, 1-Ethyl-4-Methylbenzene, 1,3,5-Trimethylbenzene, 1,2,4-Trimethylbenzene, 1,4-Dichlorobenzene |
| Metals | Arsenic (12103), Cadmium (12110), Chromium (12112), Lead (12128), Manganese (12132), Nickel (12136) |
| PM _{2.5} Speciation – ions, carbon, and metals | Ammonium, Nitrate, Sulfate, Potassium, Sodium Elemental carbon (E1 IMPROVE, E2 IMPROVE, E3 IMPROVE, EC IMPROVE TOR, EC IMPROVE TOT) Organic carbon (O1 IMPROVE, O2 IMPROVE, O3 IMPROVE, O4 IMPROVE, OC IMPROVE TOR, OC IMPROVE TOT, OP IMPROVE TOR), OP IMPROVE TOT, TC IMPROVE Aluminum, Antimony, Arsenic, Barium, Bromine, Cadmium, Calcium, Cerium, Cesium, Chlorine, Chromium, Cobalt, Copper, Europium, Gallium, Gold, Hafnium, Indium, Iridium, Iron, Lanthanum, Lead, Magnesium, Manganese, Mercury, Molybdenum, Nickel, Niobium, Phosphorus, Potassium, Rubidium, Samarium, Scandium, Selenium, Silicon, Silver, Sodium, Strontium, Sulfur, Tantalum, Terbium, Tin, Titanium, Vanadium, Wolfram, Yttrium, Zinc, and Zirconium |

Ozone (O₃)

Ozone is measured by ultraviolet absorption photometry. Air is drawn through a sample cell where ultraviolet light (254 nm wavelength) passes through it. Light not absorbed by the ozone is converted into an electrical signal proportional to the ozone concentration.

Sulfur Dioxide (SO₂)

Sulfur dioxide is measured with a fluorescence analyzer. Air is drawn through a sample cell where it is subjected to high intensity ultraviolet light. This causes the sulfur dioxide molecules in the air to fluoresce and release light. The fluorescence is detected with a photo multiplier tube and converted to an electrical signal proportional to the SO₂ concentration.

Carbon Monoxide (CO)

Carbon monoxide is measured by infrared absorption photometry. Air is drawn continuously through a sample cell where infrared light passes through it. Carbon monoxide molecules in the air absorb part of the infrared light, reducing the intensity of the light reaching a light sensor. The light is converted into an electrical signal related to the concentration of carbon monoxide in the sample cell.

Nitrogen Dioxide (NO₂) and NO_y

Nitrogen oxides are measured using the chemiluminescence reaction of NO with O₃. Air is drawn into a reaction chamber where it is mixed with a high concentration of ozone from an internal ozone generator. Any NO in the air reacts with the ozone to produce NO₂. Light emitted from this reaction is detected with a photo multiplier tube and converted to an electrical signal proportional to the NO concentration. NO₂ must be measured indirectly.

NO₂ is measured by passing the air through a converter where any NO₂ in the air is reduced to NO before the air is passed to the reaction chamber. By alternately passing the air directly to the reaction chamber, and through the converter before the reaction chamber, the analyzer alternately measures NO and NO_x. The NO₂ concentration is equal to the difference between NO and NO_x.

NO_y is measured by the same method as NO_x with the exception that the converter is at the sample inlet instead of at the reaction chamber. This position is used because the NO_y compounds are too unstable to be measured when taken in through the entire length of the typical ambient air sampling inlet system. Placing the converter at the inlet allows the catalytic reaction to convert most of the NO_y species (approximately 30 nitroxyl compounds) to NO very close to the point where ambient air is sampled. The more stable NO can then be detected as described previously.

Particulate Matter - Fine (PM_{2.5}), PM₁₀, and PM_{coarse})

PM_{2.5} is sampled by drawing air through a specially designed inlet that excludes particles larger than 2.5 microns in diameter. The particles are collected on a Teflon⁷ microfiber filter that is weighed to determine the particulate mass. The normal sampling schedule is 24 hours every third day, however, at one site (Wilmington-MLK) PM_{2.5} samples are collected for 24 hours every day.

PM_{2.5} with the Thermo SHARP monitors continuous is measured by time-averaged measurements of an integral beta attenuation mass sensor which also incorporates a nephelometer signal to ensure that the measured mass concentration remains independent of changes in the particle population being sampled. The new Teledyne T-API 640 monitors measure particulate mass using a light-scattering spectroscopy method.

PM₁₀ samples are collected using the same general method as PM_{2.5} with a specially designed inlet that excludes particles larger than 10 microns in diameter. Samples are collected every third day.

PM_{coarse} is calculated by subtracting the PM_{2.5} concentration from the collocated PM₁₀ concentration for the same day.

PM_{2.5} Speciation

Some of the gravimetric PM_{2.5} monitors are specially equipped to collect PM_{2.5} samples which are later analyzed into concentrations of the samples' chemical constituents or species. MetOne Super SAAS samplers, URG 3000N, and IMPROVE samplers are used for the collection of samples for the chemical speciation of PM_{2.5}. The samplers collect 3 samples simultaneously every third day for a period of 24 hours. These samples are then sent to an EPA contract laboratory for chemical analyses. There are over 50 species consisting of ions, metals and carbon species quantified by the analyses.

VOCs

Air toxics samples are collected for 24 hours in canisters with a XonTech 910A or Atec 2200 canister sampler on an every sixth day schedule. The canisters are returned to the Maryland Department of the Environment laboratory for analysis on an Entech/Agilent gas chromatograph mass spectrometer system.

Metals

Metals are collected for 24 hours with a high-volume TSP sampler on a quartz filter. The filter is sent to the West Virginia Division of Air Quality laboratory for analysis using ICP/MS.

Appendix A PAMS Monitoring Implementation Network Plan - Delaware

Delaware Division of Air Quality (DAQ) plans to operate one Photochemical Assessment Monitoring Stations (PAMS) site in the air monitoring network in 2018, at the Delaware NCore MLK site in Wilmington in accordance with the recently revised monitoring rule (80 FR 65292; October 26, 2015) which requires PAMS measurements June 1 through August 31 at NCore sites that are located in Core-Based Statistical Areas (CBSAs) with populations of 1,000,000 or more.

Network Decision

- The NCore site located at MLK site id 10-003-2004 will serve as the location of the required PAMS site and will measure the following parameters described below. An Inventory of equipment used at the site is provided in Attachment 1.
- ~~We request a waiver from implementing PAMS at an otherwise required NCore site entirely, or to make PAMS measurements at alternative locations such as existing PAMS sites or existing NATTS sites. Rationale for this waiver is provided in Waiver attachment~~

Auto GC Decision

Volatile organic compounds (VOCs) – A complete list of the targeted compounds are found in Table 1.

- We will measure hourly speciated VOC measurements with an auto-gas chromatograph (GC) using *Consolidated Analytical Systems integrated GC system*.
- ~~We request a waiver to allow three 8-hour samples every third day as an alternative to daily hourly speciated VOC measurements at locations (*insert locations*). Rationale for this waiver is provided in Waiver Attachment~~

Meteorology Measurements Decision – Note: EPA is suggesting the use of ceilometers for determining mixing height, however other types of meteorological equipment that provide for an indication of mixing height can be proposed

- Will measure wind direction, wind speed, temperature, humidity, atmospheric pressure, precipitation, solar radiation, ultraviolet radiation, and mixing height. We have elected to use the following instrumentation to measure the parameters described above: *Vaisala WXT560 – WS/WD, Tem, Humidity, Pressure, Precipitation*
Vaisala CL31 – Mixing Height
Kipp & Zonen CUV5 UV Radiometer – UV Radiation
Kipp & Zonen CMP3 Pyranometer – Solar Radiation
- ~~We request a waiver to allow meteorological measurements to be obtained from other nearby sites. Rationale for this waiver is provided in Waiver attachment~~

Other Required Measurements

- **Carbonyls** - Carbonyl sampling at a frequency of three 8-hour samples on a one-in-three day basis (~90 samples per PAMS sampling season) using *ATEC 2200 Carbonyl Air Sampler*. A complete list of the target carbonyl compounds may be found in Table

1. The TO-11A test method, as used in the National Air Toxics Trends (NATTS) program¹ will be used.
- **Nitrogen Oxides** – Will monitor for NO and NO_y (total oxides of nitrogen) in addition to true NO₂. The true NO₂ is required to be measured with a direct reading NO₂ analyzer, cavity attenuated phase shift (CAPS) spectroscopy or photolytic-converter NO_x analyzer. We have elected to use Model *T500U CAPS NO2* Analyzer for the true NO₂ measurement. NO and NO_y will be measured using a *Thermo Environmental 42i-Y*

Table 1 PAMS Target Compound List

| Priority Compounds | | | | Optional Compounds | | | |
|--------------------|-------------------------------------|----|-----------------------------|--------------------|-------------------------------|----|-----------------------------------|
| 1 | 1,2,3-trimethylbenzene ^a | 19 | n-hexane ^b | 1 | 1,3,5-trimethylbenzene | 19 | m-diethylbenzene |
| 2 | 1,2,4-trimethylbenzene ^a | 20 | n-pentane | 2 | 1-pentene | 20 | methylcyclohexane |
| 3 | 1-butene | 21 | o-ethyltoluene ^a | 3 | 2,2-dimethylbutane | 21 | methylcyclopentane |
| 4 | 2,2,4-trimethylpentane ^b | 22 | o-xylene ^{a,b} | 4 | 2,3,4-trimethylpentane | 22 | n-decane |
| 5 | acetaldehyde ^{b,c} | 23 | p-ethyltoluene ^a | 5 | 2,3-dimethylbutane | 23 | n-heptane |
| 6 | acetone ^{c,d} | 24 | Propane | 6 | 2,3-dimethylpentane | 24 | n-nonane |
| 7 | benzene ^{a,b} | 25 | propylene | 7 | 2,4-dimethylpentane | 25 | n-octane |
| 8 | c-2-butene | 26 | styrene ^{a,b} | 8 | 2-methylheptane | 26 | n-propylbenzene ^a |
| 9 | ethane ^d | 27 | toluene ^{a,b} | 9 | 2-methylhexane | 27 | n-undecane |
| 10 | ethylbenzene ^{a,b} | 28 | t-2-butene | 10 | 2-methylpentane | 28 | p-diethylbenzene |
| 11 | Ethylene | | | 11 | 3-methylheptane | 29 | t-2-pentene |
| 12 | formaldehyde ^{b,c} | | | 12 | 3-methylhexane | 30 | α/β-pinene |
| 13 | Isobutane | | | 13 | 3-methylpentane | 31 | 1,3 butadiene ^b |
| 14 | Isopentane | | | 14 | Acetylene | 32 | benzaldehyde ^c |
| 15 | Isoprene | | | 15 | c-2-pentene | 33 | carbon tetrachloride ^b |
| 16 | m&p-xylenes ^{a,b} | | | 16 | cyclohexane | 34 | Ethanol |
| 17 | m-ethyltoluene ^a | | | 17 | cyclopentane | 35 | Tetrachloroethylene ^b |
| 18 | n-butane | | | 18 | isopropylbenzene ^b | | |

Source: Revisions to the Photochemical Assessment Monitoring Stations Compound Target List. U.S. EPA, November 20, 2013

^a Important SOAP (Secondary Organic Aerosols Precursor) Compounds

^b HAP (Hazardous Air Pollutant) Compounds

^c Carbonyl compounds

^d Non-reactive compounds, not considered to be VOC for regulatory purposes

¹ See NATTS Technical Assistance Document for TO-11A method.

Attachment 1 Equipment Inventory

| | | | |
|---------------|--------------------------------|---|---------------------------------|
| Region | 3 | | |
| State | Delaware | | |
| AQS ID | 10-003-2004 | | |
| CBSA | Philadelphia-Camden-Wilmington | | |
| | Parameter | Category | Detail |
| | Site | Is the AQS site listed above the expected PAMS Core site? | Yes |
| | | What is the status of the decision for the expected PAMS Core site location (not started, draft, or final)? | Final |
| | | Is there an alternate PAMS Core site location selected? | No |
| | | Identify type of alternative site (existing PAMS, NATTS, etc.) | |
| | | Alternate site AQS ID (if known) | |
| | Mixing Height | Is there an existing functional ceilometer or other similar instrument available for use? | No |
| | | Current location (at future PAMS Core site, at other site, not applicable) | |
| | | Instrument type (ceilometer, radar profiler, etc.) | |
| | | Manufacturer | |
| | | Model | |
| | | Date purchased | |
| | | Comments | |
| | Auto GC | Is there an existing Auto GC available for use? | No |
| | | Current location (at future PAMS Core site, at other site, not applicable) | |
| | | Manufacturer | |
| | | Model | |
| | | Date purchased | |
| | | Does it have a service contract? | |
| | | Comments | |
| | True NO2 | Is there an existing true NO2 instrument available for use? | No |
| | | Current location (at future PAMS Core site, at other site, not applicable) | |
| | | Instrument type (photolytic conversion, cavity ringdown, CAPS, etc.) | |
| | | Manufacturer | |
| | | Model | |
| | | Date purchased | |
| | | Comments | |
| | Carbonyls Sampling | Is there an existing sequential carbonyls sampling unit or similar instrument available for use? | No |
| | | Current location (at future PAMS Core site, at other site, not applicable) | |
| | | Instrument type (photolytic conversion, cavity ringdown, CAPS, etc.) | |
| | | Manufacturer | |
| | | Model | |
| | | Date purchased | |
| | | Comments | |
| | Carbonyls Analysis | Does the site currently have a support laboratory for carbonyls or plans to use a support laboratory? | Yes |
| | | Laboratory name | City of Philadelphia AMS |
| | | Comments | |
| | Barometric Pressure | Instrument type (aneroid barometer, etc.) | capacitive silicon |
| | | Manufacturer | Vaisala |
| | | Model | WXT 520 |
| | | Date purchased | 12/2011 |
| | | Comments | |
| | UV Radiation | Instrument type (UV radiometer, etc.) | |
| | | Manufacturer | |
| | | Model | |
| | | Date purchased | |

| | | | |
|--|------------------------|--|-------------------------------|
| | | Comments | |
| | Solar Radiation | Instrument type (pyranometer, etc.) | |
| | | Manufacturer | |
| | | Model | |
| | | Date purchased | |
| | | Comments | |
| | Precipitation | Instrument type (tipping bucket, weighing, etc.) | piezoelectrical sensor |
| | | Manufacturer | Vaisala |
| | | Model | WXT 520 |
| | | Date purchased | 12/2011 |
| | | Comments | |