

Panoramic view of the CASTNET site at Sumatra, FL (SUM156)

2020 CASTNET Annual Network Plan

Clean Air Markets Division Office of Atmospheric Programs US Environmental Protection Agency

April 30, 2020

1.	Network Overview	3				
2.	Ozone and Trace-level Gas Data	6				
3.	Exceptional Events	6				
4.	Network Audit Requirements	7				
5.	Quality Control Checks	7				
6.	Performance Evaluations (PE)	8				
7.	Field Systems Audit (FSA)					
8.	National Performance Audit Program (NPAP)	11				
9.	Technical Systems Audit (TSA)	11				
10.	Annual Monitoring Network Plans and Network Assessment	12				
11.	Network Modification	12				
12.	Data Reporting and Certification	13				
Арр	endix A. Detailed Site Information	14				
Арр	endix B. Quality Assurance Validation Template					
Арр	Appendix C. Ozone Season by State					
Арр	Appendix D. CASTNET QAPP Ozone Certification Flowchart					
Appendix E. EPA Regional Office Contacts Information						
Арр	endix F. Outline for TSA Report	116				
Appendix G. Current list of 40 CFR Part 58 Compliant CASTNET Ozone and Trace-level Gas Monitors						
Арр	Appendix H. CBSA Code and Title for CASTNET Sites					
Арр	Appendix I. Summary of Current CASTNET Ozone and Trace-level Gas Monitors					
Арр	Appendix J. CASTNET Parameter Key					

Table of Contents

List of Tables

Table 1 Quality Control Checks	8
Table 2 Audit Levels for Performance Evaluations (PE)	8
Table 3 Proposed PE and FSA Schedule	9
Table 4 Annual Network Plan Schedule	

List of Figures

Figure 1 CASTNET Project Organization	.3
Figure 2 Active CASTNET sites in 2020	.5

1. Network Overview

The Clean Air Status and Trends Network (CASTNET) is a long-term monitoring network designed to report trends in regional measurements of acidic pollutants and ambient ozone (O₃) concentrations. CASTNET is managed collaboratively by the US Environmental Protection Agency – Clean Air Markets Division (EPA), the National Park Service – Air Resources Division (NPS), and the Bureau of Land Management – Wyoming State Office (BLM-WSO). In addition to EPA, NPS, and BLM-WSO, numerous other participants provide network support including tribes, other federal agencies, states, private landowners, and universities. The EPA contractor, Wood Environment & Infrastructure Solutions, Inc. (Wood), operates the EPA-sponsored sites while the NPS and BLM-WSO contractor, Air Resource Specialists, Inc. (ARS), operates the remaining sites. A table detailing the management structure of CASTNET operations is provided in Figure 1. A summary of the entire CASTNET monitoring program is available online.¹

US Government	US Government Contractors
EPA – Clean Air Markets Division	Wood
 Project Officer QA Manager Technical Monitors Administrative Contracting Officer Contract Property Coordinator 	 Project Manager Field Operations Manager Laboratory Operations Manager Data Management, Analysis, Interpretation, and Reporting Manager Property Control Manager QA Supervisor QA Manager
 NPS – Air Resources Division Contracting Officer's Representative (COR) QA Coordinator 	ARS Program Manager Network Operations Manager Data Management Manager QA Officer
BLM – Wyoming State Office Program Manager 	ARS Program Manager Network Operations Manager Data Management Manager QA Officer

Figure 1. CASTNET Project Organization

Ninety-three CASTNET sites measure weekly concentrations of sulfur dioxide (SO₂), sulfate (SO₄²⁻), nitrate (NO₃), nitric acid (HNO₃), ammonium (NH₄⁺), chloride (Cl⁻) and base cations using a 3-stage filter pack (see Figure 2). Each site also reports hourly 9-meter temperature data to calculate local condition flow volumes. Eighty-six CASTNET sites collect ambient O₃ concentrations, reported as hourly averages, using a dual cell, ultraviolet photometric analyzer. Eighty-five of the eighty-six CASTNET O₃ monitoring analyzers meet the ambient monitoring and quality assurance requirements of Title 40, Code of Federal Regulations (CFR) Part 58 Appendices A, C, D and E. The ozone analyzer at Duke Forest, NC (DUK008) does not meet the siting criteria requirements from Appendix E of Part 58 because it has an inlet height of 44 meters. Monitoring objectives, site types, detailed siting criteria, and other relevant parameters for each monitoring site may be found in Appendix A of this plan.

In addition to weekly filter pack and hourly temperature and O₃ measurements, forty CASTNET sites report hourly meteorological parameters. CASTNET also measures trace-level NO/NOy, SO₂, and CO at select sites. CASTNET O₃ and trace-level gas monitors report hourly measurements throughout the entire year and utilize nightly one-point quality control (QC) checks for fast-response troubleshooting.

To monitor consistency between the agencies, EPA operates a collocated site (ROM206) at the NPS CASTNET site located in Rocky Mountain National Park, Colorado (ROM406). Also, EPA operates a pair of collocated O₃ monitors (MCK131 and MCK231)

¹ CASTNET monitoring program https://www3.epa.gov/castnet/docs/CASTNET-Factsheet-2019.pdf

in Mackville, KY with the collocated site identified as MCK231. Data from ROM206 and MCK231 are routinely analyzed to assess precision of the measurements and to identify biases that may arise. The CASTNET quality assurance (QA) program is independent of the program management. The QA program routinely assesses compliance with the CASTNET Quality Assurance Project Plan (QAPP)² through internal monitoring, including audits and on-site system checks. Additionally, network QA is assessed through an independent audit program managed by EPA. Annual Performance Evaluation (PE) audits at most CASTNET sites are performed by Environmental Engineering & Measurement Services, Inc. (EE&MS). The remaining sites not audited by EE&MS receive PE audits by state, local, or tribal agencies to fulfill the annual PE audit requirement. EE&MS also assesses compliance with the CASTNET QAPP through a Field Systems Audit (FSA) at every CASTNET site every other year following protocols listed in the EPA QA Handbook.³ The FSA is a complementary component to the facility Technical Systems Audit (TSA) performed by another independent auditor at both the EPA and NPS/BLM-WSO contractors' operations centers every third year.

Both the EPA-sponsored and NPS-sponsored O₃ monitoring programs began before 1990. While the NPS-sponsored O₃ monitoring program was designed to meet O₃ monitoring regulations from the beginning, the EPA-sponsored O₃ monitoring program was not. All EPA-sponsored O₃ monitors were upgraded by 2011 to comply with the requirements in 40 CFR Part 58. EPA replaced the existing O₃ analyzers with a pair of Thermo Scientific[™] Model 49i monitors, where one analyzer has an onboard O₃-generator for use as an on-site transfer standard. The upgrade at the EPA-sponsored sites improved the overall quality of the ambient data, the reliability of the analyzers, and the comparability of the ambient data with other regulatory monitoring networks (e.g., State and Local Air Monitoring Sites (SLAMS) and National Core network (NCore)).

The EPA uses CASTNET O₃ and trace-level gas data to calculate design values for all sites where data completeness requirements are met. The CASTNET program follows QA/QC procedures and schedules to meet the regulatory requirements detailed in Appendix B of this plan. This document includes an overview of the CASTNET regulatory O₃ and trace-level gas monitoring program, a description of the internal and external QA programs, any planned changes to the network, and a description of each monitoring site. The procedures in this Network Plan originate from the requirements found in 40 CFR Part 58.10, but are adapted to a federally operated national monitoring network.

² CASTNET Quality Assurance Project Plan v9.3

https://www3.epa.gov/castnet/docs/CASTNET_QAPP_v9-3_Main_body.pdf

³ Quality Assurance Handbook for Air Pollution Measurement Systems Volume II, January 2017 https://www3.epa.gov/ttn/amtic/files/ambient/pm25/qa/Final%20Handbook%20Document%201_17.pdf



Figure 2. Active CASTNET sites in 2020 Green shapes represent EPA-sponsored sites. Orange shapes represent NPS-sponsored sites. The purple diamond represents a co-located pair of NPS-sponsored ozone and filterpack monitoring and EPA-sponsored ozone, filterpack, and trace-level gas monitoring. Blue shapes represent BLM-Wyoming State Office-sponsored sites. National Core network (NCore) sites are identified with a large red circle. For a list of which sites are in each category see Appendix J of this plan.

2. Ozone and Trace-level Gas Data

CASTNET monitors measure ambient O₃ concentrations for the entire year, which extends beyond the required O₃ season for many states. CASTNET submits ambient concentrations in near real time to AIRNow⁴ and reports hourly data and nightly QC results to the CASTNET website daily for sites where EPA, NPS, or BLM-WSO is the primary quality assurance organization. NPS also displays O₃ and meteorological data on the Gaseous Pollutant and Meteorological Data website⁵ and the BLM-WSO distributes O₃ data through the Wyoming Air Resource Monitoring System (WARMS) website.⁶ Wood and ARS submit the hourly O₃ and trace-level gas concentrations to EPA's Air Quality System (AQS) database on a monthly basis and daily 1-point precision results on a quarterly basis. EPA submits O₃ data from two collocated monitors (ROM206 and MCK231) to AQS, but these data are identified as 'NAAQS Excluded' because these data are solely used for QA purposes and are not used to calculate design values.

CASTNET also measures ambient trace-level gas concentrations including SO₂ and CO at Bondville, IL as required by the NCore program for the entire year. CASTNET reports ambient trace-level gas concentrations to the CASTNET website daily.⁷ Wood and ARS submit the hourly and 5-minute (SO₂ only) trace-level gas concentrations to the AQS database on a monthly basis and daily 1-point precision check results on a quarterly basis. The trace-level gas measurements reported by EPA are certified for comparison against the respective NAAQS, while NPS does not certify their trace-level gas measurements.

CASTNET uses the measurement quality objectives and validation templates described in the EPA QA Handbook Validation Template⁸ (reproduced in Appendix B of this plan) to ensure that the highest quality data are being submitted to the AQS. These tables describe operational and systematic criteria for O₃ and trace-level gas data validation, including requirements for frequency of measurements or audits, calibration schedules, and acceptance criteria for QC checks. One-minute data collected for ambient O₃ and trace-level gas measurements are used for data validation purposes and are stored indefinitely.

In addition to the QC checks required for meeting the measurement quality objectives and validation templates, semi-annual (O₃) and quarterly (SO₂ and CO) system checks are performed at each CASTNET site. Using National Institute of Standards and Technology (NIST) terminology, we define levels as degrees of separation from a NIST standard reference photometer (Level 1). During these checks, a field operations technician challenges the on-site analyzer and re-verifies the on-site transfer standard, calibrates the on-site analyzer to the traveling transfer standard (Level 2) as needed, and verifies the data logger and the shelter temperature probe using NIST-traceable standards. All on-site O₃ transfer standards at CASTNET sites are NIST-traceable at Level 3. A flow chart diagram of the data certification process for the EPA contractor, Wood, is illustrated in Appendix D of this plan.

Following guidance in 40 CFR Part 58.15, CASTNET federal managers from EPA, NPS, and BLM-WSO submit their annual data certification letter, including the AQS Data Certification Report (AMP600), to the EPA Office of Air Quality Planning and Standards (OAQPS) and applicable EPA Regional Offices by May 1 of each year. Consistent with 40 CFR Part 58.10 (a)(1), each analyzer included in Appendix G of this plan meets the siting and operational criteria required in appendices A, C, D, and E of 40 CFR Part 58 as identified for each year.

3. Exceptional Events

Exceptional events are unusual or naturally occurring events that can affect air quality but are not reasonably controllable using techniques that state, local, or tribal (S/L/T) air agencies may implement in order to attain and maintain the National Ambient

⁴AIRNow https://www.airnow.gov

⁵ NPS Gaseous Pollutant and Meteorological Data website http://ard-request.air-resource.com/

⁶ BLM-WSO WARMS website http://www.blmwarms.net/

⁷CASTNET website https://www.epa.gov/castnet/

⁸ EPA QA Handbook Appendix D Validation Templates, March 2017

https://www3.epa.gov/ttn/amtic/files/ambient/pm25/qa/APP_D%20validation%20template%20version%2003_2017_for%20AMTIC%20Rev_ 1.pdf

Air Quality Standards. Exceptional events include wildfires, stratospheric ozone intrusions, and volcanic and seismic activities. Following guidance in 40 CFR Part 50.14(a)(1), a state may request that EPA exclude data that exceed the NAAQS and have been impacted by an exceptional event. As noted in the preamble to the 2016 Exceptional Events Rule (81 FR 68216, 10/3/2016),⁹ "as the single actor responsible for administering air quality planning and management activities within its jurisdictional boundaries, the state, exclusive of tribal lands, is ultimately responsible for submitting exceptional event demonstrations for exceedances that occur at all regulatory monitoring sites within the boundary of the state."

CASTNET federal partners will work with S/L/T air agencies to include a flag in AQS for ambient data potentially influenced by an exceptional event, as requested by a S/L/T air agency that has jurisdiction over the area where a CASTNET site is located, and assist in preparing a demonstration (i.e., providing relevant information) if requested. The initial data flag is denoted as informational-use only and flagged data will continue to be used for NAAQS attainment purposes until the EPA Regional Administrator provides approval for an exceptional event demonstration.

State agencies will be responsible for working with the EPA region to submit exceptional event demonstrations, which may include data from CASTNET sites. CASTNET managers do not have the authorization to determine the sufficiency of an exceptional event demonstration or whether CASTNET monitoring data should be excluded from the NAAQS calculation. S/L/T agencies should follow the regulations described in the revision to 40 CFR Parts 50 and 51, Treatment of Data Influenced by Exceptional Events (81 FR 68216, 10/3/2016), to prepare and submit exceptional event demonstrations.

To request that CASTNET managers apply initial data flags to CASTNET O₃ data potentially impacted by an exceptional event, a S/L/T agency should email the following information to Timothy Sharac (<u>sharac.timothy@epa.gov</u>) for EPA-sponsored sites, Barkley Sive (<u>barkley_sive@nps.gov</u>) for NPS-sponsored sites, or Ryan McCammon (<u>rmccammon@blm.gov</u>) for BLM-sponsored sites:

- o date/time range of incident,
- o type of exceptional event, and
- CASTNET site(s)

Initial data flags will be applied within 30 days after CASTNET managers receive a request from a S/L/T agency. Exceptional event types and their associated AQS qualifier codes are listed on the AQS Code List webpage.¹⁰

4. Network Audit Requirements

The network audit requirements for 40 CFR Part 58 compliance are summarized in Appendix B of this plan. CASTNET managers include the PE and FSA schedules with each Annual Network Plan to ensure EPA Regional Offices have the opportunity to make travel arrangements if they choose to attend the audit. The EPA Regional Office contacts are listed in Appendix E of this plan.

5. Quality Control Checks

Automated zero/precision/span (ZPS) quality control checks are performed nightly on all CASTNET ozone analyzers as shown in Table 1. EPA-sponsored ozone analyzers also receive additional weekly QC checks at 30, 90, and 150 ppb on Sundays to verify analyzer accuracy spanning typical ambient ozone concentrations. Additional checks may be initiated remotely to troubleshoot potential issues that may arise. The criteria for the automated ZPS QC checks are included in Appendix B of this plan. Zero, precision, and span QC results are posted to the CASTNET website daily for EPA-sponsored CASTNET sites.

⁹ Federal Register Volume 81, No. 191 October 3, 2016 https://www.epa.gov/sites/production/files/2016-09/documents/exceptional_events_rule_revisions_2060-as02_final.pdf

¹⁰ AQS Code List webpage https://www.epa.gov/aqs/aqs-code-list

Table 1 Quality Control Checks

	Frequency	O₃ (ppb)	SO ₂ (ppb)	CO (ppm)
Zero	Daily	0	0	0
Precision	Daily	60	25	250
Span	Daily	225*	90	1800
Additional point #1	Weekly	30**	5**	80**
Additional point #2	Weekly	90**	40**	300**
Additional point #3	Weekly	150**	60**	800**

Table 1 Note: *NPS and BLM-WSO perform O₃ span checks at 200 ppb **EPA-sponsored CASTNET sites

6. Performance Evaluations (PE)

In accordance with EPA's QA Handbook and 40 CFR Parts 53 and 58, an independent auditor performs an annual PE audit and submits these results to AQS on a quarterly basis. Verification of the O₃ and trace-level gas analyzers during the Field Systems Audit (FSA) requires that the zero/span be within $\pm 2\%$ of the full scale of the best fit linear line. The auditor selects target concentration values among the ten audit levels, as described in Appendix A to Part 58.¹¹ The evaluation is made by challenging the monitor with audit gas standards of known concentration from a minimum of three audit levels that represent routine concentrations at the monitoring site (see Table 2 for acceptable audit ranges). Results for audit levels 1 and 2 must be less than ± 1.5 ppb or less than $\pm 15.1\%$, whichever is less restrictive, to meet the acceptance criteria for O₃, SO₂, and NO₂, while levels 1 and 2 must be less than $\pm 15.1\%$, whichever is less restrictive, to meet the acceptance criteria for CO. Results from levels 3-10 must be less than $\pm 15.1\%$ to meet the acceptance criteria.

Table 2 Audit Levels for Performance Evaluations ¹¹

Audit Level	O₃ Concentration Range, ppm	SO ₂ Concentration Range, ppm	NO ₂ Concentration Range, ppm	O ₃ , SO ₂ , and NO ₂ Acceptance Criteria	CO Concentration Range, ppm	CO Acceptance Criteria
1	0.004 - 0.0059	0.003 - 0.0029	0.003 - 0.0029	< ±1.5 ppb or < ±15.1%, whichever is greater	0.020 - 0.059	<±0.03 ppm or <±15.1%, whichever is greater
2	0.006 - 0.019	0.0030 - 0.0049	0.0030 - 0.0049	<±1.5 ppb or <±15.1%, whichever is greater	0.060 - 0.199	<±0.03 ppm or <±15.1%, whichever is greater
3	0.020 - 0.039	0.0050 - 0.0079	0.0050 – 0.0079	<±15.1%	0.200 - 0.899	<±15.1%
4	0.040 - 0.069	0.0080 - 0.0199	0.0080 - 0.0199	<±15.1%	0.900 – 2.999	<±15.1%
5	0.070 - 0.089	0.0200 - 0.0499	0.0200 - 0.0499	<±15.1%	3.000 - 7.999	<±15.1%
6	0.090 - 0.119	0.0500 – 0.0999	0.0500 – 0.0999	<±15.1%	8.000 - 15.999	<±15.1%
7	0.120 - 0.139	0.1000 - 0.1499	0.1000 - 0.2999	<±15.1%	16.000 - 30.999	<±15.1%
8	0.140 - 0.169	0.1500 – 0.2599	0.3000 – 0.4999	<±15.1%	31.000 - 39.999	<±15.1%
9	0.170 - 0.189	0.2600 – 0.7999	0.5000 – 0.7999	<±15.1%	40.000 - 49.999	<±15.1%
10	0.190 - 0.259	0.8000 - 1.000	0.8000 - 1.000	<±15.1%	50.000 - 60.000	<±15.1%

Table 2 Note: 40 CFR Part 58 Appendix A – Quality Assurance Requirements for Monitors used in Evaluations of National Ambient Air Quality Standards.¹¹ The target audit levels used for PE audits for CASTNET O₃, SO₂, and CO measurements are highlighted in bold font.

The proposed PE and FSA audit schedule for CASTNET sites is shown in Table 3 below. The independent auditor uses equipment that is NIST-certified (verified twice per year) to audit CASTNET monitoring equipment. The independent auditor performs a PE audit at each site annually and performs a FSA which includes an audit of flow, meteorological sensors, and related parameters every other year. States may perform a PE audit if they coordinate with the sponsoring agency, site supervisor, and independent auditor as explained in the third-party CASTNET audit document.¹²

¹¹ 40 CFR Part 58 Appendix A – Quality Assurance Requirements for Monitors used in Evaluations of National Ambient Air Quality Standards. http://www.ecfr.gov/cgi-bin/text-idx?SID=43a82c5c9a954280524a1abf6a3328ca&mc=true&node=ap40.6.58_161.a&rgn=div9

¹² CASTNET third-party audit document https://www.epa.gov/sites/production/files/2015-07/documents/third_party_audits.pdf

Table 3 Proposed PE and FSA Schedule

EPA Pan	State	AQS ID	POC	SITE ID	Site Name	Audit Type Even Years	Audit Month Even Years	Audit Type Odd Years	Audit Montl Odd Years
Rgn 1	СТ	090159991	1	ABT147	Abington	FSA + PE	October	PE	September
1	ME	230090103	1	ACA416	Acadia NP	FSA + PE	October	Performed by ME-DEP	September
1	ME	230039991	1	ASH135	Ashland	FSA + PE	September	PE	September
1	NH	330099991	1	WST109	Woodstock	FSA + PE	October	PE	September
2	NJ	340219991	1	WSP144	Wash. Crossing	PE	October	FSA + PE	October
2	NY	361099991	1	CTH110	Connecticut Hill	FSA + PE	September	PE	November
2	NY	360319991	1	HWF187	Huntington Wildlife Forest	FSA + PE	September	PE	September
3	MD	240339991	1	BEL116	Beltsville	FSA + PE	November	PE	October
3	MD	240199991	1	BWR139	Blackwater NWR	PE	November	FSA + PE	October
3	PA	420019991	1	ARE128	Arendtsville	FSA + PE	November	PE	October
3	PA	420479991	1	KEF112	Kane Exp. Forest	FSA + PE	October	PE	November
3	PA	421119991	1	LRL117	Laurel Hill	PE	October	FSA + PE	November
3	PA	420859991	1	MKG113	M.K. Goddard	FSA + PE	October	PE	November
3	PA	420279991	1	PSU106	Penn State	FSA + PE	November	PE	October
3	WV	540219991	1	CDR119	Cedar Creek	PE	October	FSA + PE	November
3	WV	540939991	1	PAR107	Parsons	PE	October	FSA + PE	November
3	VA	511479991	1	PED108	Prince Edward	PE	September	FSA + PE	September
3	VA	510719991	1	VPI120	Horton Station	PE	September	FSA + PE	September
3	VA	511130003	1	SHN418	Shenandoah NP - Big Meadows	PE	November	FSA + PE	November
4	AL	010499991	1	SND152	Sand Mountain	FSA + PE	February	PE	February
4	FL	120619991	1	IRL141	Indian River Lagoon	FSA	February	PE	February
4	FL	120779991	1	SUM156	Sumatra	FSA	February	PE	February
4	GA	132319991	1	GAS153	Georgia Station	FSA	February	PE	February
4	KY	212219991	1	CDZ171	Cadiz	PE	March	FSA + PE	March
4	KY	211759991	1	CKT136	Crockett	PE	April	FSA + PE	March
4	KY	212299991	1	MCK131	Mackville	PE	March	FSA + PE	March
4	КҮ	212299991	2	MCK231	Mackville Collocated	PE	March	FSA + PE	March
4	КҮ	210610501	1	MAC426	Mammoth Cave NP	PE	March	FSA + PE	March
4	MS	281619991	1	CVL151	Coffeeville	PE	March	FSA + PE	February
4	NC	370319991	1	BFT142	Beaufort	PE	November	FSA + PE	October
4	NC	371239991	1	CND125	Candor	PE	November	FSA + PE	October
4	NC	371139991	1	COW137	Coweeta	FSA + PE	March	PE	March
4	NC	370119991	1	PNF126	Cranberry	FSA + PE	March	PE	March
4	NC	N/A	Х	DUK008	Orange	PE	November	FSA + PE	October
4	TN	470419991	1	ESP127	Edgar Evins	FSA + PE	April	PE	April
4	TN	470259991	1	SPD111	Speedwell	FSA + PE	March	PE	April
4	TN	470090101	1	GRS420	Great Smoky NP - Look Rock	PE	October	FSA + PE	September

-		474400004	4		Alle e vele ve	DE	1		A
5	IL	171199991	1	ALH157	Alhambra	PE	June	FSA + PE	August
5	IL	170191001	1	BVL130	Bondville	PE	August	FSA + PE	August
5	IL	170859991	1	STK138	Stockton	PE	June	FSA + PE	August
5	IN	181699991	1	SAL133	Salamonie Reservoir	FSA + PE	August	PE	August
5	IN	180839991	1	VIN140	Vincennes	PE	June	FSA + PE	August
5	MI	261619991	1	ANA115	Ann Arbor	FSA + PE	August	PE	August
5	MI	261659991	1	HOX148	Hoxeyville	FSA + PE	August	PE	August
5	MI	261579991	1	UVL124	Unionville	FSA + PE	August	PE	August
5	MN	271370034	1	VOY413	Voyageurs NP	PE	August	FSA + PE	August
5	ОН	390479991	1	DCP114	Deer Creek	PE	April	FSA + PE	April
5	ОН	390179991	1	OXF122	Oxford	PE	April	FSA + PE	April
5	ОН	391219991	1	QAK172	Quaker City	PE	April	FSA + PE	April
5	WI	551199991	1	PRK134	Perkinstown	PE	August	FSA + PE	August
6	AR	050199991	1	CAD150	Caddo Valley	PE	February	FSA + PE	February
6	ОК	400019009	1	CHE185	Cherokee Nation	PE	February	FSA + PE	March
6	NM	350450020	1	CHC432	Chaco NM	PE	April	FSA + PE	April
6	ТΧ	483739991	1	ALC188	Alabama- Coushatta	PE	March	FSA + PE	February
6	ТΧ	480430101	1	BBE401	Big Bend NP	PE	March	FSA + PE	March
6	ТΧ	483819991	1	PAL190	Palo Duro	PE	February	FSA + PE	March
7	NE	311079991	1	SAN189	Santee Sioux	PE	July	FSA + PE	June
8	CO	080519991	1	GTH161	Gothic	PE	June	FSA + PE	June
8	CO	080830101	1	MEV405	Mesa Verde NP	FSA + PE	April	PE	April
8	СО	080690007	1	ROM406	Rocky Mtn NP Primary	PE	June	FSA + PE	June
8	СО	080690007	3	ROM206	Rocky Mtn NP QA Collocated	PE	June	FSA + PE	June
8	MT	300298001	1	GLR468	Glacier NP	FSA + PE	June	PE	June
8	ND	380070002	1	THR422	Theodore Roosevelt NP	Performed by ND-DEQ	September	FSA + PE	July
8	SD	460330132	3	WNC429	Wind Cave NP	Performed by SD-DENR	September	FSA + PE	July
8	UT	490370101	1	CAN407	Canyonlands NP	FSA + PE	April	PE	April
8	UT	490471002	1	DIN431	Dinosaur NM	FSA + PE	July	PE	July
8	UT	490530130	1	ZIO433	Zion NP	PE	April	FSA + PE	April
8	WY	560030002	1	BAS601	Basin	PE	June	FSA + PE	June
8	WY	560019991	1	CNT169	Centennial	PE	June	FSA + PE	June
8	WY	560450003	1	NEC602	Newcastle	PE	June	FSA + PE	June
8	WY	560359991	1	PND165	Pinedale	PE	August	FSA + PE	June
8	WY	560390008	1	GRT434	Grand Tetons NP	FSA + PE	August	PE	Мау
8	WY	560391011	1	YEL408	Yellowstone NP	PE	August	FSA + PE	May
9	AZ	040038001	1	CHA467	Chiricahua NM	FSA + PE	April	PE	April
9	AZ	040058001	1	GRC474	Grand Canyon NP	FSA + PE	April	PE	April
9	AZ	040170119	1	PET427	Petrified Forest	FSA + PE	April	PE	April
9	СА	060270101	1	DEV412	Death Valley NP	FSA + PE	April	PE	April
9	CA	060719002	1	JOT403	Joshua Tree NP	FSA + PE	May	PE	April

9	CA	060893003	1	LAV410	Lassen Volcanic NP	PE	Мау	FSA + PE	May
9	CA	060690003	1	PIN414	Pinnacles NM	PE	May	FSA + PE	April
9	CA	061070009	1	SEK430	Sequoia NP - Ash Mountain	PE	Мау	FSA + PE	May
9	CA	060430003	1	YOS404	Yosemite NP - Turtleback Dome	PE	Мау	FSA + PE	Мау
9	NV	320330101	1	GRB411	Great Basin NP	FSA + PE	May	PE	April
10	AK	020680003	1	DEN417	Denali NP	FSA + PE	July	PE	June
10	ID	160499991	1	NPT006	Nez Perce	FSA + PE	October	PE	October
10	ID	160230101	1	CRM435	Craters of the Moon NP	FSA + PE	October	PE	October

Table 3 Note: See Appendix H of this plan for CBSA codes for CASTNET sites where they are available

7. Field Systems Audit (FSA)

An independent auditor performs a FSA every other year at each CASTNET site to complement the requirements of the Technical Systems Audit (TSA) (required every three years) to ensure network-wide consistency among all sites within CASTNET. The purpose of these audits is to provide an independent assessment of the site, the performance of site equipment, and the proficiency of the site operator. The auditor verifies that filter pack flow, the O₃ analyzer, shelter temperature, and the meteorological sensors meet the acceptance criteria listed in Appendix B and the CASTNET QAPP.¹³ The auditor also completes a PE audit for O₃ in addition to the FSA to verify there are no line losses within the system and documents whether the monitor configuration violates any of the CASTNET siting criteria found in the QAPP. During the FSA, the auditor discusses any issues related to equipment, siting criteria, or operator handling with the operator and/or site supervisor. The independent auditor submits audit results to the site supervisor, site operator, site funding agency, and CASTNET contractor following the audit. A summary of audit results is available in a quarterly report and posted to CASTNET's Independent Audit Program webpage.¹⁴

The independent auditor sends FSA announcement letters to the agency contractor, site operator, and site sponsor describing the purpose of the site visit 2-4 weeks prior to the FSA to ensure all parties involved are prepared. The current proposed schedule is shown in Table 3.

8. National Performance Audit Program (NPAP)

The purpose of the NPAP is to assess the proficiency of the monitoring organization. As the primary sponsor for CASTNET, EPA's Clean Air Markets Division coordinates with OAQPS, EPA Regional Offices (listed in Appendix E of this plan), and the Environmental Services Assistance Team (ESAT) to fulfill the NPAP requirements for all CASTNET sites. Each monitoring organization's network is required to complete NPAP audits, with a goal of 20% of the sites each year or 100% within 6 years. Through-the-probe audits are performed during an NPAP audit using a zero air generator to supply the carrier gas to an O₃ generator. Audit O₃ concentrations are delivered to the through-the-probe dual glass manifold connected to the monitor's inlet probe while venting excess flow to the atmosphere. The O₃ generator is referenced back to a Level 2 O₃ standard which is in turn referenced to a Level 1 standard reference photometer. The auditor selects 3 or 4 known target concentrations to determine the accuracy of the on-site O₃ analyzer. The NPAP audit's percent difference criterion of less than ±1.5 ppb at audit levels 1 and 2 and less than ±10.1% at audit levels 3 through 10 is more rigorous than the criteria used for the annual performance evaluations in Table 2. The NPAP auditor is responsible for submitting the audit results to AQS.

9. Technical Systems Audit (TSA)

CASTNET uses an independent auditor to conduct the facilities portion of the TSA requirements at the contractor's O₃ laboratory once every three years. The purpose of the facility TSA is to provide a qualitative appraisal of the total measurement system. Site planning, organization, documentation, and operation are evaluated to ensure that good QA/QC practices are being applied

¹³ CASTNET Documents webpage https://www.epa.gov/castnet/

¹⁴ CASTNET's Independent Audit Program webpage https://www.epa.gov/castnet/independent-audit-program

throughout the monitoring program. An outline of the facility TSA is available in Appendix F. RTI International performed facility TSAs at the Wood laboratory in Newberry, FL in 2012, 2015, and 2018 and at the ARS facility in Fort Collins, CO in 2013 and 2017. The facility TSA consists of an assessment of the staff, facilities, data and document control, and the quality control programs. Results, findings, and the responses to the findings can be found on the CASTNET documents webpage¹⁵ under "Technical Systems Audit".

10. Annual Monitoring Network Plans and Network Assessment

CASTNET staff prepare an annual CASTNET Network Plan for public review. The Network Plan focuses on the CASTNET O₃ and trace-level gas monitoring program and addresses the monitoring requirements of 40 CFR 58.10(b). EPA, NPS, and BLM-WSO consult with OAQPS and applicable EPA Regional Offices ahead of adding or discontinuing O₃ monitors in accordance with 40 CFR 58.14 and any changes are included in this Network Plan. CASTNET staff collect additional comments by sending draft copies to the National Association of Clean Air Agencies (NACAA) and the Association of Air Pollution Control Agencies (AAPCA). A draft copy is also distributed through OAQPS' monitoring list-serve. CASTNET staff contact states directly if these states use a CASTNET monitor in place of a state-operated O₃ monitor (e.g., SLAMS) to ensure their participation in the planning process. CASTNET staff submit a final version of the Network Plan and responses to any comments received on the draft Network Plan to the EPA CASTNET O₃ webpage¹⁶ and OAQPS' Ambient Monitoring Technology Information Center (AMTIC) Network Plans webpage.¹⁷ The schedule for these activities is outlined in Table 5. The Division Director or a designee at the EPA's Clean Air Markets Division approves this plan with input from the public by July 1. OAQPS provides comments within 120 days on any plans proposing changes to the O₃ network.

Date	Network Plan Steps
March 1	Submit Network Plan to NPS/BLM-WSO for review
May 1	Distribute Network Plan to OAQPS, OAQPS list-serve, EPA Regional Offices, NACAA,
	AAPCA and post for public review on the CASTNET webpage
June 1	Deadline for public comments to Network Plan
June 25	CASTNET staff complete response to public comments
July 1	CASTNET staff distribute final version of Network Plan
October 31	OAQPS/Lead EPA Regional Office review Network Plan and provide approval

Table 4 Annual Network Plan Schedule

EPA completes a network assessment every 5 years in accordance with 40 CFR 58.10(d). CASTNET staff post the network assessment to the EPA CASTNET O_3 webpage¹⁶ and OAQPS' AMTIC Network Plan webpage.¹⁷ There is no public comment review and response to this document. The next assessment is due July 1, 2020, and every 5 years thereafter.

Some states include CASTNET sites in their Network Plan to fulfill their monitoring requirement under 40 CFR Part 58 Appendix D. These states should notify the CASTNET agency sponsor that they will be using the CASTNET site in their plan so that the state may be included in any discussions related to changes at the site.

11. Network Modification

As of April 2020, the following network modifications have occurred or are planned:

- NPS added Death Valley National Park, CA (DEV412, 06-027-0101) to CASTNET on May 1, 2019.
- NPS added Grand Tetons National Park, WY (GRT434, 56-039-0008) to CASTNET on July 1, 2019.
- NPS added Craters of the Moon National Monument and Preserve, UT (CRM435, 16-023-0101) to CASTNET on November 1, 2019.

¹⁵CASTNET Documents webpage https://www.epa.gov/castnet/

¹⁶ CASTNET O₃ webpage https://www.epa.gov/castnet/castnet-ozone-monitoring

¹⁷ OAQPS' AMTIC Network Plans webpage https://www.epa.gov/amtic/state-and-local-monitoring-plans

- NPS plans to add a new ozone analyzer at Carlsbad Caverns, NM in summer 2020.
- EPA plans to install a new small-footprint site with ozone (UMA009, WA) in Dayton, WA with the assistance of the Confederated Tribes of Umatilla Indian Reservation in summer 2020.
- 12. Data Reporting and Certification

CASTNET staff submit applicable ambient and quality assurance data to AQS within 90 days after the end of each quarterly reporting period. CASTNET complies with the annual air monitoring certification requirements in accordance with 40 CFR 58.15-16. EPA, NPS, and BLM-WSO certify CASTNET ambient O₃, SO₂, and CO data and quality assurance results by May 1 for the prior calendar year for their respective CASTNET sites and submit the data to OAQPS for review.

Appendix A. Detailed Site Information (Page 1 of 87)

CASTNET O₃ and trace-level gas monitors meet the siting criteria as specified within 40 CFR Part 58 Appendices D and E. Following guidance from 40 CFR Part 58.10b, the following detailed information required for each CASTNET monitor is listed in the following pages ordered by AQS ID.

The following parameters are the same at all CASTNET sites:

- Current sampling frequency is continuous
- Sampling season is 01/01 12/31
- Frequency of one-point QC check is daily

Parameters required by Part 58.10b, but not available include:

- Traffic count (AADT)

Appendix A. Detailed Site Information (Page 2 of 87)

AQS ID	01-049-9991
CASTNET ID	SND152
Site Name	Sand Mountain
GPS Coordinates	34.289001, -85.970065
Street Address	Sand Mountain Alabama Agricultural Experiment Station, Crossville, AL 35962
County	DeKalb
Distance to Roadway	> 100 meters
CBSA Name	Fort Payne, AL Micropolitan Statistical Area
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JAN-11
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	4/27/2019

Appendix A. Detailed Site Information (Page 3	3 of 87)
AQS ID	02-068-0003
CASTNET ID	DEN417
Site Name	Denali NP
GPS Coordinates	63.7232, -148.9676
Street Address	Denali National Park
County	Denali
Distance to Roadway	> 100 meters
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
Monitor Type	NON-EPA FEDERAL
Instrument	Thermo 49c
Method Code	047
FRM or FEM	FEM
Collecting Agency	National Park Service
Spatial Scale	Regional Scale
Reporting Agency	National Park Service
Start Date	01-JUN-87
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	9/5/2019

Ap	opendix A. Detailed Site Information (Page 4	of 87)
	AQS ID	04-003-8001
	CASTNET ID	CHA467
	Site Name	Chiricahua NM
	GPS Coordinates	32.009405, -109.389058
	Street Address	Chiricahua National Monument
	County	Cochise
	Distance to Roadway	> 100 meters
	CBSA Name	Sierra Vista-Douglas, AZ Micropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Reporting Agency	National Park Service
	Start Date	01-JUL-89
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	4/11/2019

А	ppendix A. Detailed Site Information (Page 5 AQS ID	04-005-8001
	CASTNET ID	GRC474
	Site Name	Grand Canyon NP
	GPS Coordinates	36.058642, -112.183575
	Street Address	Grand Canyon National Park, W Rim Drive
	County	Coconino
	Distance to Roadway	> 100 meters
	CBSA Name	Flagstaff, AZ Metropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Reporting Agency	National Park Service
	Start Date	01-JUL-89
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	4/9/2019

Appendix A. Detailed Site Information (Page 6 of 87)		
AQS ID	04-017-0119	
CASTNET ID	PET427	
Site Name	Petrified Forest	
GPS Coordinates	34.822508, -109.892485	
Street Address	Petrified Forest NP, Near Old SW Entrance on Old Route 180	
County	Navajo	
Distance to Roadway	> 100 meters	
CBSA Name	Show Low, AZ Micropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background	
Monitor Type	NON-EPA FEDERAL	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	National Park Service	
Reporting Agency	National Park Service	
Start Date	01-OCT-02	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	4/8/2019	

Ар	ppendix A. Detailed Site Information (Page 7	of 87)
	AQS ID	05-019-9991
	CASTNET ID	CAD150
	Site Name	Caddo Valley
	GPS Coordinates	34.179278, -93.098755
	Street Address	Lower Lake Recreation Area, Caddo Valley, AR 71923
	County	Clark
	Distance to Roadway	> 100 meters
	CBSA Name	Arkadelphia, AR Micropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-JAN-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	4/16/2019

A	ppendix A. Detailed Site Information (Page 8	-
	AQS ID	06-027-0101
	CASTNET ID	DEV412
	Site Name	Death Valley NP - Park Village
	GPS Coordinates	36.50887, -116.847798
	Street Address	Death Valley NM, Death Valley, CA
	County	Inyo
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49c
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Reporting Agency	National Park Service
	Start Date	10-DEC-93
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	01/29/2019

Ap	opendix A. Detailed Site Information (Page 9 o	-	
	AQS ID	06-043-0003	
	CASTNET ID	YOS404	
	Site Name	Yosemite NP - Turtleback Dome	
	GPS Coordinates	37.713251, -119.706196	
	Street Address	Turtleback Dome, Yosemite National Park	
	County	Mariposa	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background	
	Monitor Type	NON-EPA FEDERAL	
	Instrument	Thermo 49c	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	National Park Service	
	Reporting Agency	National Park Service	
	Start Date	01-SEP-90	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	11/12/2019	

Appendix A. Detailed Site Information (Page 10 of 87)		
AQS ID	06-069-0003	
CASTNET ID	PIN414	
Site Name	Pinnacles NM	
GPS Coordinates	36.483235, -121.156876	
Street Address	NE Entrance, Pinnacles NM	
County	San Benito	
Distance to Roadway	> 100 meters	
CBSA Name	San Jose-Sunnyvale-Santa Clara, CA Metropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background	
Monitor Type	NON-EPA FEDERAL	
Instrument	Thermo 49c	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	National Park Service	
Spatial Scale	Regional Scale	
Reporting Agency	National Park Service	
Start Date	01-APR-87	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	8/19/2019	

Appendix A. Detailed Site Information (Page 11 of 87)		
AQS ID	06-071-9002	
CASTNET ID	JOT403	
Site Name	Joshua Tree NP	
GPS Coordinates	34.069569, -116.388933	
Street Address	Joshua Tree National Monument	
County	San Bernardino	
Distance to Roadway	> 100 meters	
CBSA Name	Riverside-San Bernardino-Ontario, CA Metropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background	
Monitor Type	NON-EPA FEDERAL	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	National Park Service	
Spatial Scale	Regional Scale	
Reporting Agency	National Park Service	
Start Date	01-OCT-93	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	10/24/2019	

		- f 07)
A	ppendix A. Detailed Site Information (Page 12 AQS ID	06-089-3003
	CASTNET ID	LAV410
	Site Name	Lassen Volcanic NP
	GPS Coordinates	40.539991, -121.576462
	Street Address	Manzanita Lake, Lassen Volcanic NP
	County	Shasta
	Distance to Roadway	25 meters
	CBSA Name	Redding, CA Metropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49c
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Spatial Scale	Regional Scale
	Reporting Agency	National Park Service
	Start Date	01-NOV-87
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	5 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	5/7/2019

A	ppendix A. Detailed Site Information (Page 13	•
	AQS ID	06-107-0009
	CASTNET ID	SEK430
	Site Name	Sequoia NP - Ash Mountain
	GPS Coordinates	36.489469, -118.829153
	Street Address	Sequoia & Kings Canyon NP
	County	Tulare
	Distance to Roadway	40 meters
	CBSA Name	Visalia-Porterville, CA Metropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49c
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Reporting Agency	National Park Service
	Start Date	01-JUL-99
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	10/10/2019

Appendix A. Detailed Site Information (Page 14 of 87)	
AQS ID	08-051-9991
CASTNET ID	GTH161
Site Name	Gothic
GPS Coordinates	38.95627, -106.98587
Street Address	Gunnison National Forest, Crested Butte, CO 81224
County	Gunnison
Distance to Roadway	> 100 meters
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JUN-11
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	8/6/2019

αA	pendix A. Detailed Site Information (Page 15	of 87)
1-	AQS ID	08-069-0007
	CASTNET ID	ROM406
	Site Name	Rocky Mtn NP
	GPS Coordinates	40.278129, -105.545635
	Street Address	Rocky Mountain National Park, Estes Park, CO 80517
	County	Larimer
	Distance to Roadway	> 100 meters
	CBSA Name	Fort Collins-Loveland, CO Metropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Spatial Scale	Regional Scale
	Reporting Agency	National Park Service
	Start Date	01-AUG-87
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	7.5 m
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	6/6/2019

Ap	Appendix A. Detailed Site Information (Page 16 of 87)		
	AQS ID	08-069-0007	
	CASTNET ID	ROM206	
	Site Name	Rocky Mtn NP Collocated	
	GPS Coordinates	40.278129, -105.545635	
	Street Address	Rocky Mountain National Park, Estes Park, CO 80517	
	County	Larimer	
	Distance to Roadway	> 100 meters	
	CBSA Name	Fort Collins-Loveland, CO Metropolitan Statistical Area	
	Pollutant	Ozone, 3	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Relate Impacts, General/Background, and Quality	
		Assurance	
	Monitor Type	EPA, NON-REGULATORY	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JAN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	7.5 m	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	6/11/2019	

Appendix A. Detailed Site Information (Page 17 of 87)		
	QS ID	08-083-0101
С	ASTNET ID	MEV405
S	ite Name	Mesa Verde NP
G	SPS Coordinates	37.198398, -108.490462
S	treet Address	Mesa Verde National Park, Colorado
C	County	Montezuma
D	vistance to Roadway	> 100 meters
Р	ollutant	Ozone, 1
Р	arameter Code	44201
N	IAAQS Monitoring Objectives	Welfare Related Impacts and General/Background
Ν	Nonitor Type	NON-EPA FEDERAL
Ir	nstrument	Thermo 49c
N	Nethod Code	047
F	RM or FEM	FEM
C	collecting Agency	National Park Service
S	patial Scale	Regional Scale
R	eporting Agency	National Park Service
S	tart Date	01-MAY-93
S	ampling Frequency	Continuous
S	ampling Season	01/01 - 12/31
Р	robe Height	10 meters
D	Distance to Trees	> 20 meters
D	vistance Between Collocated	N/A
V	Vind Obstruction	360 degrees
Р	robe Material	Teflon ^(R)
C	hanges w/in 18 months	Ν
F	requency for 1 Pt QC	Daily
La	ast PE Date	6/27/2019

Appendix A. Detailed Site Information (Page 18 of 87)		
AQS ID	09-015-9991	
CASTNET ID	ABT147	
Site Name	Abington	
GPS Coordinates	41.84046, -72.010368	
Street Address	80 Ayers Rd, Abington, CT 06230	
County	Windham	
Distance to Roadway	> 100 meters	
CBSA Name	Willimantic, CT Micropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JUN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	9/25/2019	

Ap	opendix A. Detailed Site Information (Page 19		
	AQS ID	12-061-9991	
	CASTNET ID	IRL141	
	Site Name	Indian River Lagoon	
	GPS Coordinates	27.849215, -80.455595	
	Street Address	Sebastian Inlet State Recreation Area, Vero Beach, FL 32963	
	County	Indian River	
	Distance to Roadway	> 100 meters	
	CBSA Name	Sebastian-Vero Beach, FL Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JAN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	3/19/2019	

Δr	Appendix A. Detailed Site Information (Page 20 of 87)		
~	AQS ID	12-077-9991	
	CASTNET ID	SUM156	
	Site Name	Sumatra	
	GPS Coordinates	30.110226, -84.99038	
	Street Address	Apalachicola National Forest, Bristol, FL 32321	
	County	Liberty	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JAN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	3/27/2019	

A	opendix A. Detailed Site Information (Page 21 AQS ID	0787) 13-231-9991
	CASTNET ID	GAS153
	Site Name	Georgia Station
	GPS Coordinates	33.181173, -84.410054
	Street Address	Georgia Station Georgia Agricultural Experiment Station, Williamson, GA 30292
	County	Pike
	Distance to Roadway	> 100 meters
	CBSA Name	Atlanta-Sandy Springs-Marietta, GA Metropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-JAN-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	3/26/2019

Appendix A. Detailed Site Information (Page 22 of 87)		
AQS ID	16-023-01011	
CASTNET ID	CRM435	
Site Name	Craters of the Moon NM and Preserve	
GPS Coordinates	43.4606,-113.5622	
Street Address	Craters of the Moon National Monument, Idaho	
County	Idaho	
Distance to Roadway	N/A	
CBSA Name	Idaho Falls, ID	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background	
Monitor Type	EPA	
Instrument	Thermo 49c	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	National Park Service	
Start Date	01-OCT-1992	
Sampling Frequency	Continuous	
Sampling Season	01/01 – 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon [®]	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	7/9/2019	

	Amendia A. Detailed Cite Information (Deca 22 of 07)		
Ар	ppendix A. Detailed Site Information (Page 23 AQS ID	of 87) 16-049-9991	
	CASTNET ID	NPT006	
	Site Name	Nez Perce Tribe	
	GPS Coordinates	46.2756, -116.0216	
	Street Address	Woodland Road Kamiah, ID 83536	
	County	Idaho	
	Distance to Roadway	N/A	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Related Impacts and General/Background	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	27-SEP-16	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon [®]	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	7/8/2019	

Appendix A. Detailed Site Information (Page 24 of 87) 17-019-1001 AQS ID CASTNET ID **BVL130** Site Name Bondville 40.05202, -88.372481 **GPS** Coordinates Street Address Twp Rd 500 E., Champaign, IL County Champaign Distance to Roadway > 100 meters **CBSA Name** Champaign-Urbana, IL Metropolitan Statistical Area Pollutants Ozone; hourly SO₂; 5-min SO₂; CO Parameter Codes, POC 44201, 1; 42401, 2; 42401, 3; 42101, 1 NAAQS Monitoring Objectives Welfare Related Impacts and Regional Transport Monitor Type EPA Instruments Thermo 49i; TAPI T100U; TAPI T100U; TAPI T300U Method Code 047; 600; 600; 593 FRM or FEM FEM; FEM; FEM; FRM **Collecting Agency** EPA/CAMD Spatial Scale **Regional Scale Reporting Agency** EPA/CAMD Start Date 01-APR-11; 01-SEP-12; 01-SEP-12; 01-SEP-12 Sampling Frequency Continuous Sampling Season 01/01 - 12/31 Probe Height 10 meters **Distance to Trees** > 20 meters **Distance Between Collocated** N/A 360 degrees Wind Obstruction Teflon^(R) **Probe Material** Changes w/in 18 months Ν Frequency for 1 Pt QC Daily Last PE Date 11/7/2019 (44201, (42101, 42401)

Δr	Appendix A. Detailed Site Information (Page 25 of 87)		
~	AQS ID	17-085-9991	
	CASTNET ID	STK138	
	Site Name	Stockton	
	GPS Coordinates	42.287216, -89.99995	
	Street Address	10952 E. Parker Rd, Stockton, IL 61085	
	County	Jo Daviess	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-APR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	11/5/2019	

Δn	Appendix A. Detailed Site Information (Page 26 of 87)		
<i>.</i>	AQS ID	17-119-9991	
	CASTNET ID	ALH157	
	Site Name	Alhambra	
	GPS Coordinates	38.869001, -89.622815	
	Street Address	5403 State Road 160, Highland, IL 62249	
	County	Madison	
	Distance to Roadway	> 100 meters	
	CBSA Name	St. Louis, MO-IL Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-APR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	12/16/2019	

Appendix A. Detailed Site Information (Page 27 of 87)		
AQS ID	18-083-9991	
CASTNET ID	VIN140	
Site Name	Vincennes	
GPS Coordinates	38.740792, -87.484923	
Street Address	Southwest Purdue Agricultural Center, Vincennes, IN 47591	
County	Кпох	
Distance to Roadway	> 100 meters	
CBSA Name	Vincennes, IN Micropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objectives	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-APR-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	10/15/2019	

A	Appendix A. Detailed Site Information (Page 28 of 87)		
	AQS ID	18-169-9991	
	CASTNET ID	SAL133	
	Site Name	Salamonie Reservoir	
	GPS Coordinates	40.816038, -85.661407	
	Street Address	Hamilton Rd, Lagro, IN 46941	
	County	Wabash	
	Distance to Roadway	> 100 meters	
	CBSA Name	Wabash, IN Micropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JUN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	10/1/2019	

Ap	opendix A. Detailed Site Information (Page 29	of 87)
-	AQS ID	21-061-0501
	CASTNET ID	MAC426
	Site Name	Mammoth Cave NP
	GPS Coordinates	37.131794, -86.142953
	Street Address	Mammoth Cave NP - Alfred Cook Road
	County	Edmonson
	Distance to Roadway	> 100 meters
	CBSA Name	Bowling Green, KY Metropolitan Statistical Area
	Pollutants	Ozone
	Parameter Codes, POC	44201, 1
	NAAQS Monitoring Objective	Welfare Related Impacts, Regional Transport, and Maximum Ozone Concentration
	Monitor Type	EPA
	Instruments	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Reporting Agency	National Park Service
	Start Date	01-AUG-97
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	10/5/2019

Appendix A. Detailed Site Information (Page 30 of 87)		
AQS ID	21-175-9991	
CASTNET ID	CKT136	
Site Name	Crockett	
GPS Coordinates	37.92146, -83.066295	
Street Address	State Highway 437, West Liberty, KY 41472	
County	Morgan	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-APR-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	11/11/2019	

An	Appendix A. Detailed Site Information (Page 31 of 87)		
<i>,</i> .b	AQS ID	21-221-9991	
	CASTNET ID	CDZ171	
	Site Name	Cadiz	
	GPS Coordinates	36.784053, -87.85015	
	Street Address	5720 Old Dover Rd, Cadiz, KY 42211	
	County	Trigg	
	Distance to Roadway	> 100 meters	
	CBSA Name	Clarksville, TN-KY Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts, Regional Transport, and	
		Maximum Ozone Concentration	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-MAR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	12/17/2019	

Appendix A. Detailed Site Information (Page 32 of 87)		
AQS ID	21-229-9991	
CASTNET ID	MCK131/231	
Site Name	Mackville	
GPS Coordinates	37.704678, -85.048706	
Street Address	542 Wesley-Miller Rd, Harrodsburg, KY 40330	
County	Washington	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1 & 2	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport; Quality Assurance	
Monitor Type	EPA; EPA, NON-REGULATORY	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-MAR-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	0 m	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	N/Y	
Frequency for 1 Pt QC	Daily	
Last PE Date	11/5/2019; 11/5/2019	

A	ppendix A. Detailed Site Information (Page 33 AQS ID	3 of 87) 23-003-9991	
	CASTNET ID	ASH135	
	Site Name	Ashland	
	GPS Coordinates	46.603832, -68.413227	
	Street Address	45 Radar Rd, Ashland, ME 04732	
	County	Aroostook	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JUN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date		
		9/19/2019	

Appendix A. Detailed Site Information (Page 3 AQS ID	4 of 87) 23-009-0103	
CASTNET ID	ACA416	
Site Name	Acadia NP	
GPS Coordinates	44.377086, -68.2608	
Street Address	McFarland Hill-Air Pollutant Research Site	
County	Hancock	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	SLAMS & NON-EPA FEDERAL	
Instrument	Thermo 49c	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	Maine - Dept of Environmental Protection	
Spatial Scale	Regional Scale	
Reporting Agency	Maine - Dept of Environmental Protection	
Start Date	09-FEB-98	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date		
	8/21/2019	

Appendix A. Detailed Site Information (Page 35 of 87)		
AQS ID	24-019-9991	
CASTNET ID	BWR139	
Site Name	Blackwater NWR	
GPS Coordinates	38.444971, -76.111274	
Street Address	Blackwater National Wildlife Refuge, Cambridge, MD 21613	
County	Dorchester	
Distance to Roadway	> 100 meters	
CBSA Name	Cambridge, MD Micropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JAN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	11/20/2019	

Appendix A. Detailed Site Information (Page 36 of 87)		
AQS ID	24-033-9991	
CASTNET ID	BEL116	
Site Name	Beltsville	
GPS Coordinates	39.028177, -76.817127	
Street Address	Powder Mill Rd, Laurel, MD 20708	
County	Prince George's	
Distance to Roadway	> 100 meters	
CBSA Name	Washington-Arlington-Alexandria, DC-VA-MD-WV Metropolitan Statistical Area	
Pollutants	Ozone	
Parameter Code, POC	44201, 1	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-APR-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	11/18/2019	

Appendix A. Detailed Site Information (Page 37 AQS ID	7 of 87) 26-157-9991	
CASTNET ID	UVL124	
Site Name	Unionville	
GPS Coordinates		
	43.613572, -83.359869	
Street Address	1821 E. Dickerson Rd, Unionville, MI 48767	
County	Tuscola	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JUN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	8/22/2019	
	. ,	

pendix A. Detailed Site Information (Page	-
AQS ID	26-161-9991
CASTNET ID	ANA115
Site Name	Ann Arbor
GPS Coordinates	42.416636, -83.90218
Street Address	10070 Strawberry Lake Rd, Dexter, MI 48130
County	Washtenaw
Distance to Roadway	> 100 meters
CBSA Name	Ann Arbor, MI Metropolitan Statistical Area
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JUN-11
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	8/22/2019

A	Appendix A. Detailed Site Information (Page 39 of 87)		
	AQS ID	26-165-9991	
	CASTNET ID	HOX148	
	Site Name	Hoxeyville	
	GPS Coordinates	44.18089, -85.73898	
	Street Address	10637 S 9 Rd, Cadillac, MI 49601	
	County	Wexford	
	Distance to Roadway	> 100 meters	
	CBSA Name	Cadillac, MI Micropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JUN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	8/23/2019	

٨٣	Appendix A. Detailed Site Information (Page 40 of 87)		
7F	AQS ID	27-137-0034	
	CASTNET ID	VOY413	
	Site Name	Voyageurs NP	
	GPS Coordinates	48.412518, -92.829225	
	Street Address	Voyageurs National Park	
	County	St. Louis	
	Distance to Roadway	> 100 meters	
	CBSA Name	Duluth, MN-WI Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
	Monitor Type	NON-EPA FEDERAL	
	Instrument	Thermo 49c	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	National Park Service	
	Reporting Agency	National Park Service	
	Start Date	01-JUL-96	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	5 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	8/29/2019	

Appendix A. Detailed Site Information (Page 41 of 87)		
AQS ID	28-161-9991	
CASTNET ID	CVL151	
Site Name	Coffeeville	
GPS Coordinates	34.002747, -89.799183	
Street Address	Jamie L. Whitten Plant Materials Center, Coffeeville, MS 38922	
County	Yalobusha	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JAN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	4/13/2019	

Appendix A. Detailed Site Information (Page 42 of 87)		
AQS ID	30-029-8001	
CASTNET ID	GLR468	
Site Name	Glacier NP	
GPS Coordinates	48.510301, -113.996807	
Street Address	Glacier National Park	
County	Flathead	
Distance to Roadway	> 100 meters	
CBSA Name	Kalispell, MT Micropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
Monitor Type	NON-EPA FEDERAL	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	National Park Service	
Reporting Agency	National Park Service	
Start Date	01-APR-89	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	7/3/2019	

Appendix A. Detailed Site Information (Page 43		
AQS ID CASTNET ID	31-107-9991	
	SAN189	
Site Name	Santee Sioux	
GPS Coordinates	42.829154, -97.854128	
Street Address	State Spur 54d, Niobrara, NE 68760	
County	Knox	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JAN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	10/25/2019	

Ap	opendix A. Detailed Site Information (Page 44 AQS ID	32-033-0101
	CASTNET ID	GRB411
	Site Name	Great Basin NP
	GPS Coordinates	39.005121, -114.215932
	Street Address	Great Basin National Park
	County	White Pine
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49c
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Spatial Scale	Regional Scale
	Reporting Agency	National Park Service
	Start Date	01-SEP-93
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	9/16/2019

Ap	opendix A. Detailed Site Information (Page 45	
	AQS ID	33-009-9991
	CASTNET ID	WST109
	Site Name	Woodstock
	GPS Coordinates	43.944519, -71.700787
	Street Address	Hubbard Brook Experimental Forest, North Woodstock, NH 03262
	County	Grafton
	Distance to Roadway	50 meters
	CBSA Name	Lebanon, NH-VT Micropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-JUN-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	9/19/2019

Ap	Appendix A. Detailed Site Information (Page 46 of 87)		
P	AQS ID	34-021-9991	
	CASTNET ID	WSP144	
	Site Name	Washington Crossing	
	GPS Coordinates	40.312303, -74.872663	
	Street Address	Washington Crossing State Park, Titusville, NJ 08560	
	County	Mercer	
	Distance to Roadway	> 100 meters	
	CBSA Name	Trenton-Ewing, NJ Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JAN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	6/17/2019	

Appendix A. Detailed Site Information (Page 47 of 87)		
AQS ID	35-XXX-XXXX	
CASTNET ID	N/A	
Site Name	Carlsbad Caverns National Park	
GPS Coordinates	N/A	
Street Address	N/A	
County	Eddy	
Distance to Roadway	N/A	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
Monitor Type	NON-EPA FEDERAL	
Instrument	N/A	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	National Park Service	
Spatial Scale	Regional Scale	
Reporting Agency	National Park Service	
Start Date	N/A	
Sampling Frequency	Continuous	
Sampling Season	01/01 – 12/31	
Probe Height	10 meters	
Distance to Trees	N/A	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon [®]	
Changes w/in 18 months	Yes, proposed site	
Frequency for 1 Pt QC	Daily	
Last PE Date	N/A	

Ar	Appendix A. Detailed Site Information (Page 48 of 87)		
	AQS ID	35-045-0020	
	CASTNET ID	CHC432	
	Site Name	Chaco Culture National Historical Park	
	GPS Coordinates	36.03448, -107.904275	
	Street Address	Chaco Culture National Historical Park - Radio Repeater	
	County	San Juan	
	Distance to Roadway	N/A	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
	Monitor Type	NON-EPA FEDERAL	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	National Park Service	
	Spatial Scale	Regional Scale	
	Reporting Agency	National Park Service	
	Start Date	23-FEB-2017	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 – 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon [®]	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	8/6/2019	

Δr	Appendix A. Detailed Site Information (Page 49 of 87)		
· · r	AQS ID	36-031-9991	
	CASTNET ID	HWF187	
	Site Name	Huntington Wildlife Forest	
	GPS Coordinates	43.973044, -74.223317	
	Street Address	Huntington Wildlife Forest, Newcomb, NY 12852	
	County	Essex	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JUN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	7/5/2019	

Appendix A. Detailed Site Information (Page 50 of 87)		
AQS ID		36-109-9991
CASTNET ID		CTH110
Site Name		Connecticut Hill
GPS Coordina	tes	42.400875, -76.653516
Street Addres	S	Connecticut Hill Wildlife Management Area, Newfield, NY 14867
County		Tompkins
Distance to Re	oadway	> 100 meters
CBSA Name		Ithaca, NY Metropolitan Statistical Area
Pollutant		Ozone, 1
Parameter Co	de	44201
NAAQS Monit	oring Objective	Welfare Related Impacts and Regional Transport
Monitor Type		EPA
Instrument		Thermo 49i
Method Code	!	047
FRM or FEM		FEM
Collecting Age	ency	EPA/CAMD
Spatial Scale		Regional Scale
Reporting Age	ency	EPA/CAMD
Start Date		01-JAN-11
Sampling Free	quency	Continuous
Sampling Seas	son	01/01 - 12/31
Probe Height		10 meters
Distance to Tr	rees	> 20 meters
Distance Betw	veen Collocated	N/A
Wind Obstruc	tion	360 degrees
Probe Materia	al	Teflon ^(R)
Changes w/in	18 months	Ν
Frequency for	1 Pt QC	Daily
Last PE Date		7/15/2019

Appendix A. Detailed Site Information (Page 51 of 87)		
Аβ	AQS ID	37-011-9991
	CASTNET ID	PNF126
	Site Name	Cranberry
	GPS Coordinates	36.105435, -82.045015
	Street Address	Pisgah National Forest, Newland, NC 28657
	County	Avery
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-JAN-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	10/5/2019

~ ۸	Appendix A. Detailed Site Information (Page 52 of 87)		
Ар	AQS ID	37-031-9991	
	CASTNET ID	BFT142	
	Site Name	Beaufort	
	GPS Coordinates	34.884668, -76.620666	
	Street Address	Open Grounds Farm, Beaufort, NC 28516	
	County	Carteret	
	Distance to Roadway	> 100 meters	
	CBSA Name	Morehead City, NC Micropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JAN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	12/17/2019	

Appendix A. Detailed Site Information (Page 53 of 87)		
AQS ID	37-113-9991	
CASTNET ID	COW137	
Site Name	Coweeta	
GPS Coordinates	35.060527, -83.43034	
Street Address	USDA Southern Research Station, Coweeta Hydrologic Laboratory, Otto, NC 28763	
County	Macon	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JAN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	6/13/2019	

Ap	opendix A. Detailed Site Information (Page 54 AQS ID	of 87) 37-123-9991	
	CASTNET ID	CND125	
	Site Name	Candor	
	GPS Coordinates	35.26333, -79.83754	
	Street Address	136 Perry Dr, Candor, NC 27229	
	County	Montgomery	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JAN-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	7/31/2019	

Appendix A. Detailed Site Information (Page 55 of 87)

AQS ID	N/A
CASTNET ID	DUK008
Site Name	Duke Forest
GPS Coordinates	35.9745, -79.099
Street Address	600 Eubanks Rd, Chapel Hill, NC 27516
County	Orange
Distance to Roadway	> 100 meters
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	NAAQS-EXCLUDED
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JUN-19
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	44 meters
Distance to Trees	Inlet is 10 m above tree canopy
Distance Between Collocated	N/A
Wind Obstruction	None – Inlet is 10 m above tree canopy
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	NULL

Ap	Appendix A. Detailed Site Information (Page 56 of 87)		
	AQS ID	38-007-0002	
	CASTNET ID	THR422	
	Site Name	Theodore Roosevelt NP	
	GPS Coordinates	46.894844, -103.377719	
	Street Address	13881 I94 East	
	County	Billings	
	Distance to Roadway	> 100 meters	
	CBSA Name	Dickinson, ND Micropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
	Monitor Type	SLAMS	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	North Dakota - Dept of Health	
	Spatial Scale	Regional Scale	
	Reporting Agency	North Dakota - Dept of Health	
	Start Date	27-JUL-98	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	12.2 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	7/29/2019	

Ar	Appendix A. Detailed Site Information (Page 57 of 87)		
	AQS ID	39-017-9991	
	CASTNET ID	OXF122	
	Site Name	Oxford	
	GPS Coordinates	39.531115, -84.723547	
	Street Address	Ecology Research Center, Miami University, Oxford, Ohio 45056	
	County	Butler	
	Distance to Roadway	> 100 meters	
	CBSA Name	Cincinnati-Middletown, OH-KY-IN Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-APR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	10/25/2019	

٨٢	Appendix A. Detailed Site Information (Page 58 of 87)		
~	AQS ID	39-047-9991	
	CASTNET ID	DCP114	
	Site Name	Deer Creek	
	GPS Coordinates	39.635888, -83.260563	
	Street Address	Deer Creek State Park, Mt Sterling, OH 43143	
	County	Fayette	
	Distance to Roadway	> 100 meters	
	CBSA Name	Washington Court House, OH Micropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-APR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	10/24/2019	

Appendix A. Detailed Site Information (Page 59 of 87)		
AQS ID	39-121-9991	
CASTNET ID	QAK172	
Site Name	Quaker City	
GPS Coordinates	39.942714, -81.337914	
Street Address	58163 St. Johns Rd, Quaker City, OH 43773	
County	Noble	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JAN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	11/104/2019	

A	Appendix A. Detailed Site Information (Page 60 of 87)		
1	AQS ID	40-001-9009	
	CASTNET ID	CHE185	
	Site Name	Cherokee Nation	
	GPS Coordinates	35.750786 <i>,</i> -94.669789	
	Street Address	South Highway 59, Rr1, 1795 Dahlonegah Park Road, Stilwell, Oklahoma	
	County	Adair	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	TRIBAL & EPA	
	Instrument	Teledyne ML9811	
	Method Code	091	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-JUL-02	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	9/25/2019	

Appendix A. Detailed Site Information (Page	61 of 87)
AQS ID	42-001-9991
CASTNET ID	ARE128
Site Name	Arendtsville
GPS Coordinates	39.923241, -77.307863
Street Address	747 Winding Rd, Biglerville, PA 17307
County	Adams
Distance to Roadway	> 100 meters
CBSA Name	Gettysburg, PA Micropolitan Statistical Area
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JAN-11
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	7/24/2019

	Anne and the A. Deterille of Cites by ferror ethics (Dense C2 of 07)		
Αp	opendix A. Detailed Site Information (Page 62 AQS ID	of 87) 42-027-9991	
	CASTNET ID	PSU106	
	Site Name	Penn State	
	GPS Coordinates	40.720902, -77.931759	
	Street Address	1366 Tadpole Rd, Pennsylvania Furnace, PA 16865	
	County	Centre	
	Distance to Roadway	> 100 meters	
	CBSA Name	State College, PA Metropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-APR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	7/25/2019	

Appendix A. Detailed Site Information (Page 63 of 87)		
AQS ID	42-047-9991	
CASTNET ID	KEF112	
Site Name	Kane Exp. Forest	
GPS Coordinates	41.598119, -78.767866	
Street Address	Kane Experimental Forest, Allegheny National Forest, Wilcox, PA 15870	
County	Elk	
Distance to Roadway	> 100 meters	
CBSA Name	St. Mary's, PA Micropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JUN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	7/24/2019	

pendix A. Detailed Site Information (P	
AQS ID	42-085-9991
	MKG113
Site Name	M.K. Goddard
GPS Coordinates	41.426847, -80.145247
Street Address	Maurice K Goddard State Park, Sandy Lake, PA 161
County	Mercer
Distance to Roadway	60 meters
CBSA Name	Youngstown-Warren-Boardman, OH-PA Metropoli Statistical Area
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JUN-11
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	7/25/2019

۵	Appendix A. Detailed Site Information (Page 65 of 87)		
~	AQS ID	42-111-9991	
	CASTNET ID	LRL117	
	Site Name	Laurel Hill	
	GPS Coordinates	39.988309, -79.251573	
	Street Address	Laurel Hill State Park, Rockwood, PA 15557	
	County	Somerset	
	Distance to Roadway	> 100 meters	
	CBSA Name	Somerset, PA Micropolitan Statistical Area	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-APR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	9/26/2019	

Aı	Appendix A. Detailed Site Information (Page 66 of 87)		
	AQS ID	46-033-0132	
	CASTNET ID	WNC429	
	Site Name	Wind Cave NP	
	GPS Coordinates	43.557639, -103.483856	
	Street Address	Wind Cave National Park, South Dakota	
	County	Custer	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 3	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
	Monitor Type	SLAMS	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	South Dakota - Dept of Environment and Natural Resources	
	Spatial Scale	Regional Scale	
	Reporting Agency	South Dakota - Dept of Environment and Natural Resources	
	Start Date	01-JAN-05	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	3.35 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Glass	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	10/28/2019	

Appendix A. Detailed Site Information (Page 67 of 87) 47-009-0101 AQS ID CASTNET ID GRS420 Site Name Great Smoky NP - Look Rock **GPS** Coordinates 35.633482, -83.941606 Street Address Great Smoky Mountains NP Look Rock Blount County Distance to Roadway > 100 meters **CBSA Name** Knoxville, TN Metropolitan Statistical Area Pollutant Ozone, 1 Parameter Code 44201 NAAQS Monitoring Objective Welfare Related Impacts and Regional Transport SLAMS & NON-EPA FEDERAL Monitor Type Instrument Thermo 49i Method Code 047 FRM or FEM FEM **Collecting Agency** National Park Service Spatial Scale **Regional Scale Reporting Agency** National Park Service 01-JUL-88 Start Date Sampling Frequency Continuous Sampling Season 01/01 - 12/31 Probe Height 10 meters **Distance to Trees** > 20 meters **Distance Between Collocated** N/A Wind Obstruction 360 degrees Teflon^(R) **Probe Material** Changes w/in 18 months Ν Frequency for 1 Pt QC Daily Last PE Date 10/7/2019

Appendix A. Detailed Site Information (Page 68 of 87)		
AQS ID	47-025-9991	
CASTNET ID	SPD111	
Site Name	Speedwell	
GPS Coordinates	36.46983, -83.826511	
Street Address	718 Russell Hill Rd, Speedwell, TN 37870	
County	Claiborne	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-MAR-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	11/6/2019	

Ar	Appendix A. Detailed Site Information (Page 69 of 87)		
	AQS ID	47-041-9991	
	CASTNET ID	ESP127	
	Site Name	Edgar Evins	
	GPS Coordinates	36.03893, -85.73305	
	Street Address	Edgar Evins State Park, Smithville, TN 37166	
	County	DeKalb	
	Distance to Roadway	> 100 meters	
	Pollutant	Ozone, 1	
	Parameter Code	44201	
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
	Monitor Type	EPA	
	Instrument	Thermo 49i	
	Method Code	047	
	FRM or FEM	FEM	
	Collecting Agency	EPA/CAMD	
	Spatial Scale	Regional Scale	
	Reporting Agency	EPA/CAMD	
	Start Date	01-MAR-11	
	Sampling Frequency	Continuous	
	Sampling Season	01/01 - 12/31	
	Probe Height	10 meters	
	Distance to Trees	> 20 meters	
	Distance Between Collocated	N/A	
	Wind Obstruction	360 degrees	
	Probe Material	Teflon ^(R)	
	Changes w/in 18 months	Ν	
	Frequency for 1 Pt QC	Daily	
	Last PE Date	4/28/2019	

Appendix A. Detailed Site Information (Page 70 of 87)		
A	AQS ID	48-043-0101
	CASTNET ID	BBE401
	Site Name	Big Bend NP
	GPS Coordinates	29.302651, -103.177813
	Street Address	Big Bend National Park, Texas
	County	Brewster
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49c
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Spatial Scale	Regional Scale
	Reporting Agency	National Park Service
	Start Date	01-OCT-90
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	2/27/2019

Appendix A. Detailed Site Information (Page 71 of 87)		
AQS ID	48-373-9991	
CASTNET ID	ALC188	
Site Name	Alabama-Coushatta	
GPS Coordinates	30.701577, -94.674011	
Street Address	361 Tombigbee Rd, Livingston, TX 77351	
County	Polk	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-APR-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	2/25/2019	

Appendix A. Detailed Site Information (Page 72 AQS ID	2 of 87) 48-381-9991	
CASTNET ID	PAL190	
Site Name	Palo Duro	
GPS Coordinates	34.88061, -101.664703	
Street Address	Palo Duro Canyon State Park, Canyon, TX 79015	
County	Randall	
Distance to Roadway	> 100 meters	
CBSA Name	Amarillo, TX Metropolitan Statistical Area	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and General/Background	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
	EPA/CAMD	
Collecting Agency	-	
Spatial Scale	Regional Scale	
Reporting Agency Start Date	EPA/CAMD 01-JUN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	N	
Frequency for 1 Pt QC	Daily	
Last PE Date	3/1/2019	

۸.	Appendix A. Detailed Site Information (Page 73 of 87)	
А	AQS ID	49-037-0101
	CASTNET ID	CAN407
	Site Name	Canyonlands NP
	GPS Coordinates	38.458323, -109.82126
	Street Address	Canyonlands National Park, Utah
	County	San Juan
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Spatial Scale	Regional Scale
	Reporting Agency	National Park Service
	Start Date	01-SEP-92
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	8/7/2019

Ar	Appendix A. Detailed Site Information (Page 74 of 87)	
	AQS ID	49-047-1002
	CASTNET ID	DIN431
	Site Name	Dinosaur National Monument
	GPS Coordinates	40.4373, -109.3046
	Street Address	Dinosaur National Monument
	County	Uintah
	Distance to Roadway	> 100 meters
	CBSA Name	Vernal, UT Micropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Reporting Agency	National Park Service
	Start Date	01-JAN-12
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	8/8/2019

Appendix A. Detailed Site Information (Page 75 of 87)

AQS ID	49-053-0130
CASTNET ID	ZIO433
Site Name	Zion National Park, Dalton's Wash
GPS Coordinates	37.1983, -113.1506
Street Address	ZION NATIONAL PARK, UTAH
County	Washington
Distance to Roadway	>100 m
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
Monitor Type	NON-EPA FEDERAL
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	National Park Service
Spatial Scale	Regional Scale
Reporting Agency	National Park Service
Start Date	12-JAN-2004
Sampling Frequency	Continuous
Sampling Season	01/01 – 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon [®]
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	8/3/2019

Ap	pendix A. Detailed Site Information (Page 76	of 87)
	AQS ID	51-071-9991
	CASTNET ID	VPI120
	Site Name	Horton Station
	GPS Coordinates	37.329832, -80.55751
	Street Address	1856 Horton Ln, Newport, VA 24128
	County	Giles
	Distance to Roadway	> 100 meters
	CBSA Name	Blacksburg-Christiansburg-Radford, VA Metropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-APR-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	9/24/2019

۸n	Appendix A. Detailed Site Information (Page 77 of 87)	
~P	AQS ID	51-113-0003
	CASTNET ID	SHN418
	Site Name	Shenandoah NP - Big Meadows
	GPS Coordinates	38.5231, -78.43471
	Street Address	Shenandoah NP Big Meadows
	County	Madison
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	SLAMS & NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	National Park Service
	Spatial Scale	Regional Scale
	Reporting Agency	National Park Service
	Start Date	01-JUL-85
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	10/22/2019

Appendix A. Detailed Site Information (Page 78 of 87)	
AQS ID	51-147-9991
CASTNET ID	PED108
Site Name	Prince Edward
GPS Coordinates	37.165222, -78.307067
Street Address	Prince Edward-Gallion State Forest, Burkeville, VA 23922
County	Prince Edward
Distance to Roadway	> 100 meters
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	01-JAN-11
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	> 20 meters
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Ν
Frequency for 1 Pt QC	Daily
Last PE Date	7/26/2019

Appendix A. Detailed Site Information (Page 79 of 87)	
AQS ID	53-XXX-XXXX
CASTNET ID	UMA009
Site Name	Umatilla
GPS Coordinates	46.2026, -117.9539
Street Address	Dayton, WA
County	Columbia
Distance to Roadway	N/A
Pollutant	Ozone, 1
Parameter Code	44201
NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
Monitor Type	EPA
Instrument	Thermo 49i
Method Code	047
FRM or FEM	FEM
Collecting Agency	EPA/CAMD
Spatial Scale	Regional Scale
Reporting Agency	EPA/CAMD
Start Date	N/A
Sampling Frequency	Continuous
Sampling Season	01/01 - 12/31
Probe Height	10 meters
Distance to Trees	N/A
Distance Between Collocated	N/A
Wind Obstruction	360 degrees
Probe Material	Teflon ^(R)
Changes w/in 18 months	Yes, proposed site
Frequency for 1 Pt QC	Daily
Last PE Date	N/A

Appendix A. Detailed Site Information (Page 80 of 87)		
	AQS ID	54-021-9991
	CASTNET ID	CDR119
	Site Name	Cedar Creek
	GPS Coordinates	38.879503, -80.847677
	Street Address	Cedar Creek State Park, Cedarville, WV 26611
	County	Gilmer
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-APR-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	25 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	11/12/2019

Appendix A. Detailed Site Information (Page 81 of 87)		
AQS ID	54-093-9991	
CASTNET ID	PAR107	
Site Name	Parsons	
GPS Coordinates	39.090434, -79.661742	
Street Address	USDA Northern Research Station, Monongahela National Forest, Parsons, WV 26287	
County	Tucker	
Distance to Roadway	> 100 meters	
Pollutant	Ozone, 1	
Parameter Code	44201	
NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport	
Monitor Type	EPA	
Instrument	Thermo 49i	
Method Code	047	
FRM or FEM	FEM	
Collecting Agency	EPA/CAMD	
Spatial Scale	Regional Scale	
Reporting Agency	EPA/CAMD	
Start Date	01-JUN-11	
Sampling Frequency	Continuous	
Sampling Season	01/01 - 12/31	
Probe Height	10 meters	
Distance to Trees	> 20 meters	
Distance Between Collocated	N/A	
Wind Obstruction	360 degrees	
Probe Material	Teflon ^(R)	
Changes w/in 18 months	Ν	
Frequency for 1 Pt QC	Daily	
Last PE Date	9/25/2019	

Appendix A. Detailed Site Information (Page 82 of 87)		
A۲	AQS ID	55-119-9991
	CASTNET ID	PRK134
	Site Name	Perkinstown
	GPS Coordinates	45.206525, -90.597209
	Street Address	W 10746 County Highway M, Medford, WI 54451
	County	Taylor
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and Regional Transport
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-APR-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	8/27/2019

Δ.	Appendix A. Detailed Site Information (Page 83 of 87)	
А	AQS ID	56-001-9991
	CASTNET ID	CNT169
	Site Name	Centennial
	GPS Coordinates	41.364531, -106.24002
	Street Address	Roosevelt National Forest, Centennial, WY 82055
	County	Albany
	Distance to Roadway	> 100 meters
	CBSA Name	Laramie, WY Micropolitan Statistical Area
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-JUN-11
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^(R)
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	7/16/2019

Ар	Appendix A. Detailed Site Information (Page 84 of 87)	
•	AQS ID	56-003-0002
	CASTNET ID	BAS601
	Site Name	Basin
	GPS Coordinates	44.279947, -108.041
	Street Address	Basin (WARMS Station)
	County	Big Horn
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	Bureau of Land Management - Wyoming State Office
	Spatial Scale	Regional Scale
	Reporting Agency	Bureau of Land Management – Wyoming State Office
	Start Date	28-NOV-12
	Sampling Frequency	Continuous
	Sampling Season	01/01 – 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon®
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	8/19/2019

٨٣	ppendix A. Detailed Site Information (Page 85	of 87)
~	AQS ID	56-035-9991
	CASTNET ID	PND165
	Site Name	Pinedale
	GPS Coordinates	42.929031, -109.787796
	Street Address	Skyline Dr, Pinedale, WY 82941
	County	Sublette
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	EPA
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	EPA/CAMD
	Spatial Scale	Regional Scale
	Reporting Agency	EPA/CAMD
	Start Date	01-JUN-11
	Sampling Frequency	Continuous
	Sampling Season	01/-1 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon ^{®(R)}
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	7/1/2019

Appendix A. Detailed Site Information (Page 86 of 87) 56-039-1011 AQS ID CASTNET ID YEL408 Site Name Yellowstone NP 44.565356, -110.400338 **GPS** Coordinates Street Address Yellowstone National Park County Teton Distance to Roadway > 100 meters Jackson, WY-ID Micropolitan Statistical Area **CBSA Name** Pollutant Ozone, 1 Parameter Code 44201 NAAQS Monitoring Objective Welfare Related Impacts and General/Background NON-EPA FEDERAL Monitor Type Instrument Thermo 49c Method Code 047 FRM or FEM FEM **Collecting Agency** National Park Service Spatial Scale **Regional Scale Reporting Agency** National Park Service Start Date 01-JUL-96 Sampling Frequency Continuous Sampling Season 01/01 - 12/31 Probe Height 10 meters **Distance to Trees** 15 meters **Distance Between Collocated** N/A Wind Obstruction 360 degrees Teflon® **Probe Material** Changes w/in 18 months Ν Frequency for 1 Pt QC Daily Last PE Date 7/2/2019

		- (07)
Аŗ	opendix A. Detailed Site Information (Page 87 AQS ID	56-045-0003
	CASTNET ID	NEC602
	Site Name	Newcastle
	GPS Coordinates	43.8731, -104.192009
	Street Address	Newcastle, Warms Station
	County	Weston
	Distance to Roadway	> 100 meters
	Pollutant	Ozone, 1
	Parameter Code	44201
	NAAQS Monitoring Objective	Welfare Related Impacts and General/Background
	Monitor Type	NON-EPA FEDERAL
	Instrument	Thermo 49i
	Method Code	047
	FRM or FEM	FEM
	Collecting Agency	Bureau of Land Management - Wyoming State Office
	Spatial Scale	Regional Scale
	Reporting Agency	Bureau of Land Management – Wyoming State Office
	Start Date	14-NOV-12
	Sampling Frequency	Continuous
	Sampling Season	01/01 - 12/31
	Probe Height	10 meters
	Distance to Trees	> 20 meters
	Distance Between Collocated	N/A
	Wind Obstruction	360 degrees
	Probe Material	Teflon [®]
	Changes w/in 18 months	Ν
	Frequency for 1 Pt QC	Daily
	Last PE Date	7/23/2019

Appendix B. Quality Assurance Validation Template¹ Ozone Validation Template

1) Requirement (O₃)	2) Frequency	3) Acceptance Criteria	Information /Action
CRITICAL CRITERIA - O3	CRITICAL CRITERIA - O3	CRITICAL CRITERIA - O ₃	CRITICAL CRITERIA - O ₃
Monitor	NA	Meets requirements listed in FRM/FEM designation	 40 CFR Part 58 App C Sec. 2.1 NA 40 CFR Part 53 & <u>FRM/FEM method list</u>
One Point QC Check Single analyzer	Every 14 days	< <u>+</u> 7.1% (percent difference) or < <u>+</u> 1.5 ppb difference whichever is greater	1 and 2) <u>40 CFR Part 58 App A Sec. 3.1</u> 3) Recommendation based on DQO in 40 CFR Part 58 App A Sec. 2.3.1.2. QC Check Conc range 0.005 - 0.08 ppm and 05/05/2016 <u>Technical Note on AMTIC</u>
Zero/span check	Every 14 days	Zero drift < <u>+</u> 3.1 ppb (24 hr) < <u>+</u> 5.1 ppb (>24hr-14 day) Span drift < <u>+</u> 7.1 %	1 and 2) <u>QA Handbook Volume 2</u> Sec. 12.3 3) Recommendation and related to DQO
OPERATIONAL CRITERIA - O ₃	OPERATIONAL CRITERIA - O ₃	OPERATIONAL CRITERIA - O3	OPERATIONAL CRITERIA - O ₃
Shelter Temperature Range	Daily (hourly values)	20.0 to 30.0° C. (Hourly avg) or per manufacturers specifications if designated to a wider temperature range	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2 Generally, the 20-30.0° C range will apply but the most restrictive operable range of the instruments in the shelter may also be used as guidance. FRM/FEM list found on <u>AMTIC</u> provides temp. range for given instrument. FRM/FEM monitor testing is required at 20-30° C range per 40 CFR Part 53.32
Shelter Temperature Control	Daily (hourly values)	< 2.1° C SD over 24 hours	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Shelter Temperature Device Check	Every 182 days and 2/ calendar year	< <u>+</u> 2.1°C of standard	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Annual Performance Evaluation Single analyzer	Every site every 365 days and 1/ calendar year within period of monitor operation,	Percent difference of audit levels 3-10 < <u>+</u> 15.1% Audit levels 1&2 < <u>+</u> 1.5 ppb difference or < <u>+</u> 15.1%	1 and 2) 40 CFR Part 58 App A Sec. 3.1.2 3) Recommendation- 3 audit concentrations not including zero. AMTIC guidance 2/17/2011 <u>AMTIC Technical Memo</u>
Federal Audits (NPAP)	20% of sites audited in calendar year	Audit levels 1&2 < <u>+</u> 1.5 ppb difference all other levels percent difference < <u>+</u> 10.1%	1 and 2) 40 CFR Part 58 App A Sec. 3.1.3 3) NPAP QAPP/SOP

1) Requirement (O ₃)	2) Frequency	3) Acceptance Criteria	Information /Action	
Verification/Calibration	Upon receipt/adjustment/repair/ installation/moving and repair and recalibration of standard of higher level Every 182 day and 2/ calendar year if manual zero/span performed biweekly Every 365 day and 1/ calendar year if continuous zero/span performed daily	All points < <u>+</u> 2.1 % or <u>< +</u> 1.5 ppb difference of best-fit straight line whichever is greater and Slope 1 <u>+</u> .05	 40 CFR Part 50 App D Recommendation 40 CFR Part 50 App D Sec 4.5.5.6 Multi-point calibration (0 and 4 upscale points) Slope criteria is a recommendation 	
Zero Air/Zero Air Check	Every 365 days and 1/calendar year	Concentrations below LDL	1) 40 CFR Part 50 App D Sec. 4.1 2 and 3) Recommendation	
Ozone Level 2 Standard	Ozone Level 2 Standard	Ozone Level 2 Standard	Ozone Level 2 Standard	
Certification/recertification to Standard Reference Photometer (Level 1)	Every 365 days and 1/calendar year	single point difference < <u>+</u> 3.1%	1) 40 CFR Part 50 App D Sec. 5.4 2 and 3) <u>Transfer Standard Guidance EPA-454/B-10-001</u> Level 2 standard (formerly called primary standard) usually transported to EPA Regions SRP for comparison	
Level 2 and Greater Transfer Standard Precision	Every 365 days and 1/calendar year	Standard Deviation less than 0.005 ppm or 3.0% whichever is greater	1) 40 CFR Part 50 Appendix D Sec. 3.1 2) Recommendation, part of reverification 3) 40 CFR Part 50 Appendix D Sec. 3.1	
(if recertified via a transfer standard)	Every 365 days and 1/calendar year	Regression slopes = 1.00 <u>+</u> 0.03 and two intercepts are 0 <u>+</u> 3 ppb	1, 2 and 3) Transfer Standard Guidance EPA-545/B-10- 001	
O₃ Transfer standard (Level 3 and greater)	O₃ Transfer standard (Level 3 and greater)	O ₃ Transfer standard (Level 3 and greater)	O ₃ Transfer standard (Level 3 and greater)	
Qualification	Upon receipt of transfer standard	< <u>+</u> 4.1% or < <u>+</u> 4 ppb (whichever greater)	1, 2 and 3) Transfer Standard Guidance EPA-545/B-10- 001	
Certification	After qualification and upon receipt/adjustment/repair	RSD of six slopes <u><</u> 3.7% Std. Dev. of 6 intercepts <u><</u> 1.5	1, 2 and 3) Transfer Standard Guidance EPA-545/B-10- 001 1	
Recertification to higher level standard	Beginning and end of O3 season or every 182 days and 2/calendar year whichever less	New slope = <u>+</u> 0.05 of previous and RSD of six slopes <u><</u> 3.7% Std. Dev. of 6 intercepts <u><</u> 1.5	1, 2 and 3) Transfer Standard Guidance EPA-545/B-10- 001 recertification test that then gets added to most recent 5 tests. It does not meet acceptability certification fails	
Detection (FEM/FRMs) Noise and Lower Detectable Limits (LDL) are part of the FEM/FRM requirements. It is recommended that monitoring organizations perform the LDL test to minimally confirm and establish the LDL of their monitor. Performing the LDL test will provide the noise information.				
Noise	Every 365 days and 1/ calendar year	<u><</u> 0.0025 ppm (standard range) ≤ 0.001 ppm (lower range)	 40 CFR Part 53.23 (b) (definition & procedure) Recommendation- info can be obtained from LDL 40 CFR Part 53.20 Table B-1 	
Lower detectable limit	Every 365 days and 1/calendar year	≤ 0.005 ppm (standard range) ≤ 0.002 ppm (lower range)	 40 CFR Part 53.23 (b) (definition & procedure) Recommendation 40 CFR Part 53.20 Table B-1 	

1) Requirement (O ₃)	2) Frequency	3) Acceptance Criteria	Information /Action
SYSTEMATIC CRITERIA - O ₃	SYSTEMATIC CRITERIA - O ₃	SYSTEMATIC CRITERIA - O ₃	SYSTEMATIC CRITERIA - O ₃
Standard Reporting Units	All data	ppm (final units in AQS)	1, 2 and 3) 40 CFR Part 50 App U Sec. 3(a)
Rounding convention for design value calculation	All routine concentration data	3 places after decimal with digits to right truncated	1, 2 and 3) 40 CFR Part 50 App U Sec. 3(a) The rounding convention is for averaging values for comparison to NAAQS not for reporting individual hourly values.
	3-Year Comparison	<u>> 90% (avg) daily max available in ozone</u> season with min of 75% in any one year.	1,2,3) 40 CFR Part 50 App U Sec 4(b)
Completeness (seasonal)	8- hour average	≥ if at least 6 of the hourly concentrations for the 8-hour period are available	1) 40 CFR Part 50 App U 2 and 3) 40 CFR Part 50 App U Sec. 3(b)
	Valid Daily Max	≥ if valid 8-hour averages are available for at least 13 of the 17 consecutive 8-hour periods starting from 7:00 a.m. to 11:00 p.m	1) 40 CFR Part 50 App U 2,3) 40 CFR Part 50 App U Sec. 3(d)
Sample Residence Time Verification	Every 365 days and 1/calendar year	20 Seconds	1) 40 CFR Part 58 App E, Sec. 9 (c) 2) Recommendation 3) 40 CFR Part 58 App E, Sec. 9 (c)
Sample Probe, Inlet, Sampling train	All sites	Borosilicate glass (e.g., Pyrex [®]) or Teflon [®]	 <u>40 CFR Part 58 App E, Sec.</u> Sec. 9 (a) Recommendation 40 CFR Part 58 App E, Sec. Sec. 9 (a) FEP and PFA have been accepted as an equivalent material to Teflon. Replacement or cleaning is suggested as 1/year and more frequent if pollutant load or contamination dictate
Siting	Every 365 days and 1/calendar year	Meets siting criteria or waiver documented	 40 CFR Part 58 App E, Sec. 2-6 2) Recommendation 3) 40 CFR Part 58 App E, Sec. 2-6
EPA Standard Ozone Reference Photometer (SRP) Recertification (Level 1)	Every 365 days and 1/calendar year	Regression slope = 1.00 <u>+</u> 0.01 and intercept < 3 ppb	1, 2 and 3) Transfer Standard Guidance EPA-454/B-10- 001 This is usually at a Regional Office and is compared against the traveling SRP
Precision (using 1-point QC checks)	Calculated annually and as appropriate for design value estimates	90% CL CV < 7.1%	1) 40 CFR Part 58 App A 2.3.1.2 & 3.1.1 2) 40 CFR Part 58 App A Sec. 4 (b) 3) 40 CFR Part 58 App A Sec. 4.1.2
Bias (using 1-point QC checks)	Calculated annually and as appropriate for design value estimates	95% CL < <u>+</u> 7.1%	1) 40 CFR Part 58 App A 2.3.1.2 & 3.1.1 2) 40 CFR Part 58 App A Sec. 4 (b) 3) 40 CFR Part 58 App A Sec. 4.1.3

CO Validation Template

1) Requirement (CO)	2) Frequency	3) Acceptance Criteria	Information /Action
CRITICAL CRITERIA-CO	CRITICAL CRITERIA-CO	CRITICAL CRITERIA-CO	CRITICAL CRITERIA-CO
Sampler/Monitor	NA	Meets requirements listed in FRM/FEM designation	1) 40 CFR Part 58 App C Sec. 2.1 2) NA 3) 40 CFR Part 53 & <u>FRM/FEM method list</u>
One Point QC Check Single analyzer	Every 14 days	< <u>+</u> 10.1% (percent difference)	1 and 2) <u>40 CFR Part 58 App A Sec. 3.1</u> .1 3) Recommendation based on DQO in 40 CFR Part 58 App A Sec. 2.3.1. QC Check Conc range 0.5 – 5 ppm
Zero/span check	Every 14 days	Zero drift < <u>+</u> 0.41 ppm (24 hr) < <u>+</u> 0.61 ppm (>24hr-14 day) Span drift < <u>+</u> 10.1 %	1 and 2) <u>QA Handbook Volume 2</u> Sec. 12.3 3) Recommendation
OPERATIONAL CRITERIA-CO	OPERATIONAL CRITERIA-CO	OPERATIONAL CRITERIA-CO	OPERATIONAL CRITERIA-CO
Shelter Temperature range	Daily (hourly values)	20.0 to 30.0° C. (Hourly avg) or per manufacturers specifications if designated to a wider temperature range	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2 Generally, the 20-30.0 °C range will apply but the most restrictive operable range of the instruments in the shelter may also be used as guidance. FRM/FEM list found on <u>AMTIC</u> provides temp. range for given instrument. FRM/FEM monitor testing is required at 20-30 °C range per 40 CFR Part 53.32
Shelter Temperature Control	Daily (hourly values)	< 2.1°C SD over 24 hours	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Shelter Temperature Device Check	Every 182 days and 2/ calendar year	< <u>+</u> 2.1°C of standard	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Annual Performance Evaluation Single Analyzer	Every site every 365 days and 1/ calendar year	Percent difference of audit levels $3-10 < \pm 15.1\%$ Audit levels $1\&2 < \pm 0.031$ ppm difference or $< \pm 15.1\%$	1 and 2) 40 CFR Part 58 App A Sec. 3.1.2 3) Recommendation- 3 audit concentrations not including zero. <u>AMTIC Technical Memo</u>
Federal Audits (NPAP)	20% of sites audited in a calendar year	Audit levels 1&2 < <u>+</u> 0.031 ppm difference all other levels percent difference < <u>+</u> 15.1%	1 and 2) 40 CFR Part 58 App A Sec. 3.1.3 3) NPAP QAPP/SOP
Verification/Calibration	Upon receipt/adjustment/repair/ installation/moving Every 182 day and 2/ calendar year if manual zero/span performed biweekly Every 365 days and 1/ calendar year if continuous zero/span performed daily	All points < <u>+</u> 2.1 % or <u>< +</u> 0.03 ppm difference of best-fit straight line. whichever is greater and Slope 1 <u>+</u> .05	1) 40 CFR Part 50 Appendix C Sec. 4 2 and 3) Recommendation See details about CO2 sensitive instruments Multi- point calibration (0 and 4 upscale points) Slope criteria is a recommendation

1) Requirement (CO)	2) Frequency	3) Acceptance Criteria	Information /Action
Gaseous Standards	All gas cylinders	NIST Traceable (e.g., EPA Protocol Gas)	 40 CFR Part 50 Appendix C Sec. 4.3.1 NA Green Book 40 CFR Part 50 Appendix C Sec. 4.3.1 See details about CO2 sensitive instruments Gas producer used must participate in EPA Ambient Air Protocol Gas Verification Program 40 CFR Part 58 App A Sec. 2.6.1
Zero Air/Zero Air Check	Every 365 days and 1/ calendar year	< 0.1 ppm CO	1) <u>40 CFR Part 50 App C</u> Sec. 4.3.2 2) Recommendation 3) 40 CFR Part 50 App C Sec. 4.3.2
Gas Dilution Systems	Every 365 days and 1/ calendar year or after failure of 1 point QC check or performance evaluation	Accuracy < <u>+</u> 2.1 %	1, 2 and 3) Recommendation based on SO2 requirement in 40 CFR Part 50 App A-1 Sec. 4.1.2
		the FEM/FRM requirements. It is recommended that the DL test will provide the noise information.	t monitoring organizations perform the LDL test to
Noise	Every 365 days and 1/ calendar year	<pre>≤ 0.2 ppm (standard range) <pre>≤ 0.1 ppm (lower range)</pre></pre>	 40 CFR Part 53.23 (b) (definition & procedure) Recommendation- info can be obtained from LDL 40 CFR Part 53.20 Table B-1
Lower detectable level	Every 365 days and 1/ calendar year	<u><</u> 0.4 ppm (standard range) <u><</u> 0.2 ppm (lower range)	 40 CFR Part 53.23 (c) (definition & procedure) Recommendation <u>40 CFR Part 53.20 Table B-1</u>
SYSTEMATIC CRITERIA-CO	SYSTEMATIC CRITERIA-CO	SYSTEMATIC CRITERIA-CO	SYSTEMATIC CRITERIA-CO
Standard Reporting Units	All data	ppm (final units in AQS)	1, 2 and 3) 40 CFR Part 50.8 (a)
Rounding convention for design value calculation	All routine concentration data	1 decimal place	1, 2 and 3) 40 CFR Part 50.8 (d) The rounding convention is for averaging values for comparison to NAAQS not for reporting individual hourly values.
Completeness	8-hour standard	75% of hourly averages for the 8-hour period	1) 40 CFR Part 50.8(c) 2) 40 CFR Part 50.8(a-2)
Completeness Sample Residence Time Verification	8-hour standard Every 365 days and 1/ calendar year	75% of hourly averages for the 8-hour period ≤ 20 Seconds	1) 40 CFR Part 50.8(c) 2)
Sample Residence Time			 1) 40 CFR Part 50.8(c) 2) 40 CFR Part 50.8(a-2) 3) 40 CFR Part 50.8(c) 1, 2, and 3) Recommendation. CO not a reactive gas but suggest following same methods other gaseous criteria pollutants. 1, 2, and 3) Recommendation. CO not a reactive gas but suggest following same methods other gaseous criteria pollutants. FEP and PFA have been accepted as a equivalent material to Teflon. Replacement/cleaning is suggested as 1/year and more frequent if pollutant load dictate.
Sample Residence Time Verification Sample Probe, Inlet, Sampling	Every 365 days and 1/ calendar year	≤ 20 Seconds	 1) 40 CFR Part 50.8(c) 2) 40 CFR Part 50.8(a-2) 3) 40 CFR Part 50.8(c) 1, 2, and 3) Recommendation. CO not a reactive gas but suggest following same methods other gaseous criteria pollutants. 1, 2, and 3) Recommendation. CO not a reactive gas but suggest following same methods other gaseous criteria pollutants. FEP and PFA have been accepted as a equivalent material to Teflon. Replacement/cleaning is suggested as 1/year and more frequent if pollutant load

1) Requirement (CO)	2) Frequency	3) Acceptance Criteria	Information /Action
checks)	appropriate for design		2) 40 CFR Part 58 App A Sec. 4 (b)
	value estimates		3) 40 CFR Part 58 App A Sec. 4.1.2
	Calculated annually and as		1) 40 CFR Part 58 App A Sec. 3.1.1
Bias (using 1-point QC checks)	appropriate for design	95% CL < + 10.1%	2) 40 CFR Part 58 App A Sec. 4 (b)
	value estimates	_	3) 40 CFR Part 58 App A Sec. 4.1.3

NO₂, NO_x, NO Validation Template

1) Requirement (NO ₂)	2) Frequency	3) Acceptance Criteria	Information /Action
CRITICAL CRITERIA- NO ₂	CRITICAL CRITERIA- NO2	CRITICAL CRITERIA- NO ₂	CRITICAL CRITERIA- NO ₂
Sampler/Monitor	NA	Meets requirements listed in FRM/FEM designation	 40 CFR Part 58 App C Sec. 2.1 NA 40 CFR Part 53 & <u>FRM/FEM method list</u>
One Point QC Check Single analyzer	Every 14 days	< <u>+</u> 15.1% (percent difference) or < <u>+</u> 1.5 ppb difference whichever is greater	1 and 2) <u>40 CFR Part 58 App A Sec. 3.1</u> .1 3) Recommendation based on DQO in 40 CFR Part 58 App A Sec. 2.3.1.5 QC Check Conc range 0.005 - 0.08 ppm and 05/05/2016 <u>Technical Note on AMTIC</u>
Zero/span check	Every 14 days	Zero drift < <u>+</u> 3.1 ppb (24 hr) < <u>+</u> 5.1 ppb (>24hr-14 day) Span drift < + 10.1 %	1 and 2) <u>QA Handbook Volume 2</u> Sec. 12.3 3) Recommendation and related to DQO
Converter Efficiency	During multi-point calibrations, span and audit Every 14 days	(≥96%) 96% – 104.1%	 40 CFR Part 50 App F Sec. 1.5.10 and 2.4.10 2) Recommendation 3) 40 CFR Part 50 App F Sec. 1.5.10 and 2.4.10 Regulation states ≥96%, 96 – 104.1% is a recommendation.
OPERATIONAL CRITERIA- NO2	OPERATIONAL CRITERIA- NO ₂	OPERATIONAL CRITERIA- NO ₂	OPERATIONAL CRITERIA- NO ₂
Shelter Temperature Range	Daily (hourly values)	20.0 to 30.0° C. (Hourly avg) or per manufacturers specifications if designated to a wider temperature range	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2 Generally, the 20-30.0 ° C range will apply but the most restrictive operable range of the instruments in the shelter may also be used as guidance. FRM/FEM list found on <u>AMTIC</u> provides temp. range for given instrument. FRM/FEM monitor testing is required at 20-30 ° C range per 40 CFR Part 53.32

1) Requirement (NO ₂)	2) Frequency	3) Acceptance Criteria	Information /Action
Shelter Temperature Control	Daily (hourly values)	< 2.1°C SD over 24 hours	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Shelter Temperature Device Check	Every 182 days and 2/calendar year	< <u>+</u> 2.1° C of standard	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Annual Performance Evaluation Single Analyzer	Every site every 365 days and 1/ calendar year	Percent difference of audit levels 3-10 < <u>+</u> 15.1% Audit levels 1&2 < <u>+</u> 1.5 ppb difference or < <u>+</u> 15.1%	 40 CFR Part 58 App A Sec. 3.1.2 40 CFR Part 58 App A Sec. 3.1.2 Recommendation - 3 audit concentrations not including zero. <u>AMTIC Technical Memo</u>
Federal Audits (NPAP)	20% of sites audited in calendar year	Audit levels 1&2 < <u>+</u> 1.5 ppb difference all other levels percent difference < <u>+</u> 15.1%	1 & 2) 40 CFR Part 58 App A Sec. 3.1.3 3) NPAP QAPP/SOP
Verification/Calibration	Upon receipt/adjustment/repair/ installation/moving Every 182 day and 2/ calendar year if manual zero/span performed biweekly Every 365 day and 1/ calendar year if continuous zero/span performed daily	Instrument residence time ≤ 2 min Dynamic parameter ≥ 2.75 ppm- min All points < <u>+</u> 2.1 % or <u>< +</u> 1.5 ppb difference of best-fit straight line whichever is greater and Slope 1 <u>+</u> .05	 40 CFR Part 50 App F 2 and 3) Recommendation Multi-point calibration (0 and 4 upscale points) Slope criteria is a recommendation
Gaseous Standards	All gas cylinders	NIST Traceable (e.g., EPA Protocol Gas) 50-100 ppm of NO in Nitrogen with < 1 ppm NO2	 40 CFR Part 50 App F Sec. 1.3.1 NA <u>Green Book</u> 40 CFR Part 50 App F Sec. 1.3.1. A technical memo may change the concentration requirement. Gas producer used must participate in EPA <u>Ambient</u> Air Protocol Gas Verification Program 40 CFR Part
Zero Air/ Zero Air Check	Every 365 days and 1/ calendar year	Concentrations below LDL	58 App A Sec. 2.6.1 1) <u>40 CFR Part 50 App F</u> Sec. 1.3.2 2 and 3) Recommendation
Gas Dilution Systems	Every 365 days and 1/ calendar year or after failure of 1 point QC check or performance evaluation	Accuracy < <u>+</u> 2.1 %	1, 2 and 3) Recommendation based on SO2 requirement in 40 CFR Part 50 App A-1 Sec. 4.1.2
	nd Lower Detectable Limits (LDL) are part of the the LDL of their monitor. Performing the LDL t		monitoring organizations perform the LDL test to
Noise	Every 365 days and 1/ calendar year	<u><</u> 0.005 ppm	 40 CFR Part 53.23 (b) (definition & procedure) 2) Recommendation- info can be obtained from LDL 3) 40 CFR Part 53.20 Table B-1

1) Requirement (NO ₂)	2) Frequency	3) Acceptance Criteria	4) Information /Action
Lower detectable level	Every 365 days and 1/ calendar year	<u>≤</u> 0.01 ppm	 40 CFR Part 53.23 (c) (definition & procedure) Recommendation 40 CFR Part 53.20 Table B-1
SYSTEMATIC CRITERIA- NO2	SYSTEMATIC CRITERIA- NO ₂	SYSTEMATIC CRITERIA- NO ₂	SYSTEMATIC CRITERIA- NO ₂
Standard Reporting Units	All data	ppb (final units in AQS)	1, 2 and 3) 40 CFR Part 50 App S Sec. 2 (c)
Rounding convention for data reported to AQ S	All routine concentration data	1 place after decimal with digits to right truncated	1, 2 and 3) 40 CFR Part 50 App S Sec. 4.2 (a) The rounding convention is for averaging values for comparison to NAAQS not for reporting individual hourly values.
	Annual Standard	≥ 75% hours in year	1) 40 CFR Part 50 App S Sec. 3.1(b) 2) 40 CFR Part 50 App S Sec. 3.1(a) 3) 40 CFR Part 50 App S Sec. 3.1(b)
Completeness	1-hour standard	 1) 3consecutive calendars years of complete data 2) 4 quarters complete in each year 3) ≥75% sampling days in quarter 4) ≥ 75% of hours in a day 	 40 CFR Part 50 App S Sec. 3.2(b) 40 CFR Part 50 App S Sec. 3.2(a) 40 CFR Part 50 App S Sec. 3.2(b) More details in 40 CFR Part 50 App S
Sample Residence Time Verification	Every 365 days and 1/ calendar year	<u>≤</u> 20 Seconds	 40 CFR Part 58 App E, Sec. 9 (c) Recommendation 40 CFR Part 58 App E, Sec. 9 (c)
Sample Probe, Inlet, Sampling train	All sites	Borosilicate glass (e.g., Pyrex [®]) or Teflon [®]	1, 2 and 3) 40 CFR Part 58 App E Sec. 9 (a) FEP and PFA have been accepted as equivalent material to Teflon. Replacement or cleaning is suggested as 1/year and more frequent if pollutant load or contamination dictate
Siting	Every 365 days and 1/ calendar year	Meets siting criteria or waiver documented	 40 CFR Part 58 App E, Secs 2-6 Recommendation 40 CFR Part 58 App E, Sec. 2-6
Precision (using 1-point QC checks)	Calculated annually and as appropriate for design value estimates	90% CL CV < 15.1%	1) <u>40 CFR Part 58 App A</u> Sec. 2.3.1.5 & 3.1.1 2) 40 CFR Part 58 App A Sec. 4 (b) 3) 40 CFR Part 58 App A Sec. 4.1.2
Bias (using 1-point QC checks)	Calculated annually and as appropriate for design value estimates	95% CL < <u>+</u> 15.1%	1) 40 CFR Part 58 App A Sec. 2.3.1.5 & 3.1.1 2) 40 CFR Part 58 App A Sec. 4 (b) 3) 40 CFR Part 58 App A Sec. 4.1.3

SO₂ Validation Template

1) Requirement (SO ₂)	2) Frequency	3) Acceptance Criteria	Information /Action
CRITICAL CRITERIA- SO ₂	CRITICAL CRITERIA- SO2	CRITICAL CRITERIA- SO ₂	CRITICAL CRITERIA- SO ₂
Sampler/Monitor	NA	Meets requirements listed in FRM/FEM designation	1) 40 CFR Part 58 App C Sec. 2.1 2) NA 3) 40 CFR Part 53 & <u>FRM/FEM method list</u>
One Point QC Check Single analyzer	Every 14 days	< <u>+</u> 10.1% (percent difference) or < <u>+</u> 1.5 ppb difference whichever is greater	1 and 2) <u>40 CFR Part 58 App A Sec. 3.1.1</u> 3) Recommendation based on DQO in 40 CFR Part 58 App A Sec. 2.3.1.2 QC Check Conc range 0.005 - 0.08 ppm and 05/05/2016 <u>Technical Note on AMTIC</u>
Zero/span check	Every 14 days	Zero drift < <u>+</u> 3.1 ppb (24 hr) < <u>+</u> 5.1 ppb (>24hr-14 day) Span drift < <u>+</u> 10.1 %	1 and 2) <u>QA Handbook Volume 2</u> Sec. 12.3 3) Recommendation and related to DQO
OPERATIONAL CRITERIA- SO2	OPERATIONAL CRITERIA- SO ₂	OPERATIONAL CRITERIA- SO ₂	OPERATIONAL CRITERIA- SO2
			1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Shelter Temperature Range	Daily (hourly values)	20.0 to 30.0° C. (Hourly avg) or per manufacturers specifications if designated to a wider temperature range	Generally, the 20-30.0 °C range will apply but the most restrictive operable range of the instruments in the shelter may also be used as guidance. FRM/FEM list found on <u>AMTIC</u> provides temp. range for given instrument. FRM/FEM monitor testing is required at 20- 30 °C range per 40 CFR Part 53.32
Shelter Temperature Control	Daily (hourly values)	< 2.1° C SD over 24 hours	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Shelter Temperature Device Check	every 180 days and 2/calendar year	< <u>+</u> 2.1°C of standard	1, 2 and 3) QA Handbook Volume 2 Sec. 7.2.2
Annual Performance Evaluation Single Analyzer	Every site every 365 days and 1/ calendar year	Percent difference of audit levels 3-10 < <u>+</u> 15.1% Audit levels 1&2 < <u>+</u> 1.5 ppb difference or < <u>+</u> 15.1%	1 and 2) 40 CFR Part 58 App A Sec. 3.1.2 3) Recommendation - 3 audit concentrations not including zero. <u>AMTIC Technical Memo</u>
Federal Audits (NPAP)	20% of sites audited in calendar year	Audit levels 1&2 < <u>+</u> 1.5 ppb difference all other levels percent difference < <u>+</u> 15.1%	1&2) 40 CFR Part 58 App A Sec. 3.1.3 3) NPAP QAPP/SOP
Verification/Calibration	Upon receipt/adjustment/repair/ installation/moving Every 182 day and 2/ calendar year if manual zero/span performed biweekly Every 365 day and 1/ calendar year if continuous zero/span performed daily	All points < <u>+</u> 2.1 % or < <u>+</u> 1.5 ppb difference of best-fit straight line whichever is greater and Slope 1 <u>+</u> .05	1) 40 CFR Part 50 App A-1 Sec. 4 2 and 3) Recommendation Multi-point calibration (0 and 4 upscale points) Slope criteria is a recommendation

1) Requirement (SO ₂)	2) Frequency	3) Acceptance Criteria	Information /Action
Gaseous Standards	All gas cylinders	<u>NIST Traceable</u> (e.g., EPA Protocol Gas)	 40 CFR Part 50 App A-1 Sec. 4.1.6.1 NA <u>Green Book</u> 40 CFR Part 50 App F Sec. 1.3.1 Producers must participate in <u>Ambient Air Protocol Gas</u> <u>Verification Program</u> 40 CFR Part 58 App A Sec. 2.6.1
Zero Air/ Zero Air Check	Every 365 days and 1/ calendar year	Concentrations below LDL < 0.1 ppm aromatic hydrocarbons	 <u>40 CFR Part 50 App A-1</u> Sec. 4.1.6.2 2) Recommendation 3) Recommendation and 40 CFR Part 50 App A-1 Sec. 4.1.6.2
Gas Dilution Systems	Every 365 days and 1/ calendar year or after failure of 1point QC check or performance evaluation	Accuracy < <u>+</u> 2.1 %	 40 CFR Part 50 App A-1Sec. 4.1.2 Recommendation 40 CFR Part 50 App A-1 Sec. 4.1.2
	Lower Detectable Limits (LDL) are part of the LDL of their monitor. Performing the LDL		at monitoring organizations perform the LDL test to
Noise	Every 365 days and 1/ calendar year	<u><</u> 0.001 ppm (standard range) <u><</u> 0.0005 ppm (lower range)	 40 CFR Part 53.23 (b) (definition & procedure) 2) Recommendation- info can be obtained from LDL 3) 40 CFR Part 53.20 Table B-1
Lower detectable level	Every 365 days and 1/ calendar year	<u><</u> 0.002 ppm (standard range) <u><</u> 0.001 ppm (lower range)	 40 CFR Part 53.23 (c) (definition & procedure) Recommendation 40 CFR Part 53.20 Table B-1
SYSTEMATIC CRITERIA-	SYSTEMATIC CRITERIA- SO ₂	SYSTEMATIC CRITERIA- SO ₂	SYSTEMATIC CRITERIA- SO ₂
SO ₂			
Standard Reporting Units	All data	ppb (final units in AQS)	1, 2 and 3) 40 CFR Part 50 App T Sec. 2 (c)
Rounding convention for design value calculation	All routine concentration data	1 place after decimal with digits to right truncated	1, 2 and 3) 40 CFR Part 50 App T Sec. 2 (c) The rounding convention is for averaging values for comparison to NAAQS not for reporting individual hourly values.
Completeness	1 hour standard	Hour – 75% of hour Day- 75% hourly Conc Quarter- 75% complete days Years- 4 complete quarters 5-min value reported only for valid hours	 2 and 3) 40 CFR Part 50 App T Sec. 3 (b), (c) More details in CFR on acceptable completeness. 5-min values or 5-min max value (40 CFR part 58.16(g)) only reported for the valid portion of the hour reported. If the hour is incomplete no 5-min or 5-min max reported.
Sample Residence Time Verification	Every 365 days and 1/ calendar year	<u><</u> 20 Seconds	 40 CFR Part 58 App E, Sec. 9 (c) 2) Recommendation 3) 40 CFR Part 58 App E, Sec. 9 (c)
Sample Probe, Inlet, Sampling train	All sites	Borosilicate glass (e.g., Pyrex $^{\circ}$) or Teflon $^{\circ}$	1, 2 and 3) 40 CFR Part 58 App E Sec. 9 (a) FEP and PFA have been accepted as equivalent material to Teflon. Replacement or cleaning is suggested as 1/year and more frequent if pollutant load or contamination dictate

1) Requirement (SO ₂)	2) Frequency	3) Acceptance Criteria	Information /Action
Siting	Every 365 days and 1/ calendar year	Meets siting criteria or waiver documented	 40 CFR Part 58 App E, Sec. 2-6 Recommendation 40 CFR Part 58 App E, Sec. 2-6
Precision (using 1-point QC checks)	Calculated annually and as appropriate for design value estimates	90% CL CV < 10.1%	1) 40 CFR Part 58 App A Sec. 2.3.1.6 & 3.1.1 2) 40 CFR Part 58 App A Sec. 4 (b) 3) 40 CFR Part 58 App A Sec. 4.1.2
Bias (using 1-point QC checks)	Calculated annually and as appropriate for design value estimates	95% CL < <u>+</u> 10.1%	1) 40 CFR Part 58 App A Sec. 2.3.1.6 & 3.1.1 2) 40 CFR Part 58 App A Sec. 4 (b) 3) 40 CFR Part 58 App A Sec. 4.1.3

¹ Table reproduced from OAQPS' *QA Handbook Appendix D Validation Templates. Ambient Air Quality Monitoring Program EPA-454/B-17-001 March, 2017. Appendix D.* https://www3.epa.gov/ttn/amtic/files/ambient/pm25/qa/APP_D%20validation%20template%20version%2003_2017_for%20AMTIC%20Rev_1.pdf

² Match numbered details within the 4) Information/Action column with columns (1) Requirement (pollutant), (2) Frequency, and (3) Acceptance Criteria.


Appendix C. Ozone Season by State^{1,2}

State	Begin Month	End Month
Alabama	March	October
Alaska	April	October
Arizona	January	December
Arkansas	March	November
California	January	December
Colorado	January	December
Connecticut	March	September
Delaware	March	October
District of Columbia	March	October
Florida	January	December
Georgia	March	October
Hawaii	January	December
Idaho	April	September
Illinois	March	October
Indiana	March	October
lowa	March	October
Kansas	March	October
Kentucky	March	October
Louisiana (Northern) AQCR 019, 022	March	October
Louisiana (Southern) AQCR 106	January	December
Maine	April	September
Maryland	March	October
Massachusetts	March	September
Michigan	March	October
Minnesota	March	October
Mississippi	March	October
Missouri	March	October
Montana	April	September
Nebraska	March	October
Nevada	January	December
New Hampshire	March	September
New Jersey	March	October
New Mexico	January	December
New York	March	October
North Carolina	March	October
North Dakota	March	September
Ohio	March	October
Oklahoma	March	November
Oregon	May	September
Pennsylvania	March	October
Puerto Rico	January	December
Rhode Island	March	September
South Carolina	March	October
South Dakota	March	October
Tennessee	March	October
Texas (Northern) AQCR 022, 210, 211, 212, 215, 217, 218	March	November
Texas (Southern) AQCR 106, 153, 213, 214, 216	January	December
Utah	January	December
Vermont	April	September
Virginia	March	October
Washington	March	September
washington	ividy	September


West Virginia	March	October
Wisconsin	March	October 15
Wyoming	January	September
American Samoa	January	December
Guam	January	December
Virgin Islands	January	December

¹ Ozone season by State from Appendix D to 40 CFR Part 58, Table D-3.
 ² Air Quality Control Region (AQCR) as delineated in 40 CFR Part 81, Subpart B.

Appendix D. CASTNET QAPP Ozone Certification Flowchart

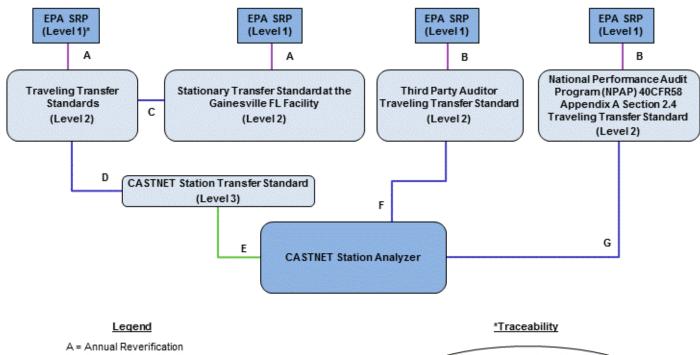

- B = Quarterly Reverification
- C = Audited ~1/6 weeks
- D = Reverification 1/6 months
- E = Zero, Span and single Point QC check daily
- F = Audited Annually
- G = Audited 1/5 years



Appendix E	. EPA Regional	Office	Contacts	Information
------------	----------------	--------	----------	-------------

EPA Region	Name	Phone	Email
Region 1	Judge, Robert	617-918-8387	judge.robert@epa.gov
Region 2	Ruvo, Richard A.	212-637-4014	ruvo.richard@epa.gov
	Gavin, Lau	212-637-3708	gavin.lau@epa.gov
Region 3	Hyden, Loretta	215-814-2113	hyden.loretta@epa.gov
Region 4	Rinck, Todd	404-562-9062	rinck.todd@epa.gov
	Garver, Daniel	404-562-9839	garver.daniel@epa.gov
Region 5	Hamilton, Scott	312-353-4775	hamilton.scott@epa.gov
	Compher, Michael	312-886-5745	compher.michael@epa.gov
Region 6	Sather, Mark	214-665-8353	sather.mark@epa.gov
Region 7	Davis, Michael	913-551-5042	davis.michael@epa.gov
	Grooms, Leland	913-551-5010	grooms.leland@epa.gov
Region 8	Payton, Richard	303-312-6439	payton.richard@epa.gov
	Rickard, Joshua	303-312-6460	rickard.joshua@epa.gov
Region 9	Biland, Larry	415-947-4132	biland.larry@epa.gov
Region 10	Hall, Christopher	206-553-0521	hall.christopher@epa.gov

Appendix F. Outline for TSA Report

Please refer to Conducting Technical Systems Audits of Ambient Air Monitoring Programs document # EPA-454/B-17-004 November 2017

- 1. Executive Summary
- 2. Introduction
- 3. General Program and Quality Management (Audit of EPA contractor's office and NPS contractor's office)
 - a. Complete General/Quality Management Forms
 - b. Findings, Discussions, Recommendations
- 4. Network Management
 - a. Complete Network Management, Field Support, Instrument Certification/Testing, Standards and Calibrations, and Instrument Repair Forms
 - b. Table listing the site locations, number of monitors at each location, type of monitor (SLAMS, SPM, etc.), what is measured
 - c. Findings, Discussions, Recommendations
- 5. Field Operations
 - a. Complete Field Overview Forms
 - b. Table that list site name, AQS ID, and pollutants monitored
 - c. Findings, Discussions, Recommendations
- 6. Laboratory Operations
 - a. Complete Laboratory Operations Forms
 - b. Findings, Discussions, Recommendations
- 7. Data and Data Management
 - a. Complete Data and Data Management Forms
 - b. Findings, Discussions, Recommendations
- 8. Quality Control and Quality Assurance

Appendix G. Current list of 40 CFR Part 58 Compliant CASTNET Ozone and Trace-level Gas Monitors

BOV CT 09015991 1 0.3 ABT147 EPA EPA EPA V <th>ЕРА</th> <th>ST</th> <th>AQS ID</th> <th>POC</th> <th>PARAM</th> <th>SITE_ID</th> <th>AGY</th> <th>PQAO¹</th> <th>d Trace-level Gas Mo NOTES</th> <th></th> <th>3</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th>	ЕРА	ST	AQS ID	POC	PARAM	SITE_ID	AGY	PQAO ¹	d Trace-level Gas Mo NOTES		3								
D DOUBLE DOUBLE <thdouble< th=""> <thdouble< th=""></thdouble<></thdouble<>										2011 ²	2012	2013	2014	2015	2016	2017	2018	2019	2020
Image Image <th< th=""><td>1</td><td>СТ</td><td>090159991</td><td>1</td><td>03</td><td>ABT147</td><td>EPA</td><td>EPA</td><td></td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td></th<>	1	СТ	090159991	1	03	ABT147	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Image: 100000000 Image: 1000000000000000000000000000000000000	1	ME	230039991	1	03	ASH135	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Image Image <th< th=""><td>1</td><td>ME</td><td>230090103</td><td>1</td><td>03</td><td>ACA416</td><td>NPS</td><td>ME</td><td></td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td><td>Y</td></th<>	1	ME	230090103	1	03	ACA416	NPS	ME		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
N. Jad21993 I O N V	1	ME	230199991	1	03	HOW132	EPA	EPA		Y	Y								
a b	1	NH	330099991	1	03	WST109	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
2 NV 36109991 1 O.3 CH110 EPA EPA PA V	2	NJ	340219991	1	03	WSP144	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
A D	2	NY	360319991	1	03	HWF187	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
A Dot of the set of the se	2	NY	361099991	1	03	CTH110	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
A B B B B B B B B B B B B B A A A Y	3	MD	240199991	1	03	BWR139	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
NB Clobby Cloby Cloby Cloby	3	MD	240339991	1	SO ₂ 1Hr	BEL116	EPA	EPA				Y	Y	Y	Y				
No. DOSDELLO DATA DATA <thdata< th=""> <thdata< th=""> DATA <t< th=""><td>3</td><td>MD</td><td>240339991</td><td>2</td><td>5Min</td><td>BEL116</td><td>EPA</td><td>EPA</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></t<></thdata<></thdata<>	3	MD	240339991	2	5Min	BEL116	EPA	EPA											
3 PA 42027991 1 03 PS1106 EPA EPA Y	3	MD	240339991	1	03	BEL116	EPA	EPA		Y	Y	Y	Y	Y		Y		Y	Y
B A 420479991 1 O3 KE112 EPA EPA Y	3	PA	420019991	1	03	ARE128	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
3 PA 420859991 1 0.3 MKG113 EPA EPA EPA Y <td>3</td> <td>PA</td> <td>420279991</td> <td>1</td> <td>03</td> <td>PSU106</td> <td>EPA</td> <td>EPA</td> <td></td> <td>Y</td>	3	PA	420279991	1	03	PSU106	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
3 PA 42119991 1 03 LR117 EPA EPA Y	3	PA	420479991	1	03	KEF112	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
3 VA 510719991 1 03 VPI20 EPA EPA PPA Y	3	PA	420859991	1		MKG113	EPA	EPA										Y	Y
3 VA 51113003 1 03 SHN418 NPS NPS Y	3	PA	421119991	1	03	LRL117	EPA	EPA		Y	Y		Y	Y		Y	Y	Y	Y
3 VA 51120000 1 03 PED108 EPA EPA EPA EPA Y <td>3</td> <td>VA</td> <td>510719991</td> <td>1</td> <td>03</td> <td>VPI120</td> <td>EPA</td> <td>EPA</td> <td></td> <td>Y</td> <td></td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td>	3	VA	510719991	1	03	VPI120	EPA	EPA		Y		Y	Y	Y	Y	Y	Y	Y	Y
3 WV 540219991 1 03 CDR119 EPA EPA EPA PA Y <td>3</td> <td>VA</td> <td>511130003</td> <td>1</td> <td>03</td> <td>SHN418</td> <td>NPS</td> <td>NPS</td> <td></td> <td>Y</td>	3	VA	511130003	1	03	SHN418	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
3 WV 540939991 1 03 PAR107 EPA EPA EPA Y <td>3</td> <td>VA</td> <td>511479991</td> <td>1</td> <td>03</td> <td>PED108</td> <td>EPA</td> <td>EPA</td> <td></td> <td>Y</td>	3	VA	511479991	1	03	PED108	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4 AL 010499991 1 03 SND152 EPA EPA PA Y	3	WV		1	03	CDR119	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
A FL 100<	3	WV	540939991	1	03	PAR107	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
A FL 12 03 NH112 13 14 <	4	AL	010499991	1	03	SND152	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4 GA 132319991 1 O3 GAS153 EPA EPA EPA Y <td>4</td> <td>FL</td> <td>120619991</td> <td>1</td> <td>03</td> <td>IRL141</td> <td>EPA</td> <td>EPA</td> <td></td> <td>Y</td>	4	FL	120619991	1	03	IRL141	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
A N	4	FL	120779991	1	03	SUM156	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4 KY 210610501 1 CO MAC426 NPS NPS Data are not certified Image: Constrained Image: Constrained </th <td>4</td> <td>GA</td> <td></td> <td>1</td> <td>03</td> <td>GAS153</td> <td>EPA</td> <td>EPA</td> <td></td> <td></td> <td>Y</td> <td></td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>Y</td>	4	GA		1	03	GAS153	EPA	EPA			Y		Y	Y	Y	Y	Y	Y	Y
A A A B A B A B	4	KY	210610501	1	03	MAC426	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Image: Normal and the image: Norma and the image: Norma and the image: Norma an	4			1			NPS		certified									Y	
A NO									certified									Y	
4 KY 212219991 1 O3 CDZ171 EPA EPA Y	4				5Min													Y	
4 KY 212299991 1 O3 MCK131 EPA EPA Y	4			1			EPA											Y	Y
4 KY 212299991 2 O3 MCK231 EPA EPA QA only beginning 1/1/2015 ³ Y Y	4						EPA	EPA										Y	Y
A MS 281619991 1 O3 CVL151 EPA EPA Y	4	KY	212299991	1	03	MCK131	EPA	EPA		Y			Y	Y	Y	Y	Y	Y	Y
4 NC 370119991 1 O3 PNF126 EPA EPA Y	4	KY	212299991	2	03	MCK231	EPA	EPA		Y	Y	Y	Y						
	4	MS	281619991	1	03	CVL151	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	4	NC	370119991	1	03	PNF126	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	4	NC	370319991	1	03	BFT142	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y

4	NC	371139991	1	03	COW137	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4	NC	371239991	1	03	CND125	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Ŷ
4	NC	N/A	X	03	DUK008	EPA	EPA	NAAQS-EXCLUDED										
4	TN	470090101	1	03	GRS420	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
4	TN	470259991	1	03	SPD111	EPA	EPA		Y	Y	Y	Y	Y	Y	Ŷ	Ŷ	Ŷ	Ŷ
4	TN	470419991	1	03	ESP127	EPA	EPA		Y	Y	Y	Y	Y	Y	Ŷ	Ŷ	Ŷ	Ŷ
5	IL	170191001	1	03	BVL130	EPA	EPA		Y	Y	Y	Y	Y	Y	Ŷ	Ŷ	Ŷ	Ŷ
5	IL	170191001	2	SO ₂ 1Hr	BVL130	EPA	EPA				Y	Y	Y	Y	Y	Y	Y	Y
5	IL	170191001	3	SO ₂ 1111	BVL130	EPA	EPA				Y	Y	Y	Y	Ŷ	Ŷ	Ŷ	Ŷ
5		1/0151001	5	5Min	DVLISO	EIX							-	-	-	-	-	-
5	IL	170191001	1	СО	BVL130	EPA	EPA				Y	Y	Y	Y	Y	Y	Y	Y
5	IL	170859991	1	03	STK138	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	IL	171199991	1	03	ALH157	EPA	EPA		Y	Y	Υ	Y	Y	Y	Y	Y	Y	Y
5	IN	180839991	1	03	VIN140	EPA	EPA		Y	Y	Υ	Y	Y	Y	Y	Y	Y	Y
5	IN	181699991	1	03	SAL133	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	MI	261579991	1	03	UVL124	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	MI	261619991	1	03	ANA115	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	MI	261659991	1	03	HOX148	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	MN	271370034	1	03	VOY413	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	ОН	390179991	1	03	OXF122	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	ОН	390479991	1	03	DCP114	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	ОН	391219991	1	03	QAK172	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
5	WI	551199991	1	03	PRK134	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
6	AR	050199991	1	03	CAD150	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
6	ОК	400019009	1	03	CHE185	EPA	CN		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
6	NM	35XXXXXXX	Х	03	N/A	NPS	NPS	Proposed site, 2020										
6	NM	350450020	1	03	CHC432	NPS	NPS	New site, 2017							Y	Y	Y	Y
6	ТΧ	480430101	1	03	BBE401	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
6	ТΧ	483739991	1	03	ALC188	EPA	EPA			Y	Y	Y	Y	Y	Y	Y	Y	Y
6	ТΧ	483819991	1	03	PAL190	EPA	EPA			Y	Y	Y	Y	Y	Y	Y	Y	Y
7	KS	201619991	1	03	KNZ184	EPA	EPA	Discontinued 4/2013	Y	Y								
7	NE	311079991	1	03	SAN189	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	СО	080519991	1	03	GTH161	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	со	080690007	3	03	ROM206	EPA	EPA	QA only beginning 10/2012	Y	Y								
8	СО	080690007	1	03	ROM406	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	СО	080830101	1	03	MEV405	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	MT	300298001	1	03	GLR468	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	ND	380070002	1	03	THR422	NPS	ND		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	SD	460330132	3	03	WNC429	NPS	SD		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	UT	490370101	1	03	CAN407	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	WY	560019991	1	03	CNT169	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	WY	560030002	1	03	BAS601	BLM	BLM				Y	Y	Y	Y	Y	Y	Y	Y

		<u>г</u> г					1	1									1	
8	WY	560359991	1		PND165	EPA	EPA		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	WY	560390008	1	03	GRT434	NPS	NPS	Existing NPS site, included w/CASTNET on 7/1/2019									Y	Y
8	WY	560391011	1	03	YEL408	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
8	WY	560450003	1	03	NEC602	BLM	BLM				Y	Y	Y	Y	Y	Y	Y	Y
8	UT	490471002	1	03	DIN431	NPS	NPS	New site 1/2014				Y	Y	Y	Y	Y	Y	Y
8	UT	490530130	1	03	ZIO433	NPS	NPS	Existing NPS site, included w/CASTNET on 1/1/2018								Y	Y	Y
9	AZ	040038001	1	03	CHA467	NPS	NPS		Y	Y	Y	Y	Y	Υ	Y	Υ	Y	Y
9	AZ	040058001	1	03	GRC474	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	AZ	040170119	1	03	PET427	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	CA	060270101	1	03	DEV412	NPS	NPS	Existing NPS site, included w/CASTNET on 5/1/2019									Y	Y
9	CA	060430003	1	03	YOS404	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	CA	060690003	1	03	PIN414	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	CA	060719002	1	03	JOT403	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	CA	060893003	1	03	LAV410	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	CA	061070009	1	03	SEK430	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
9	NV	320330101	1	03	GRB411	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
10	AK	020680003	1	03	DEN417	NPS	NPS		Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
10	WA	530531010	1	03	MOR409	NPS	NPS	Discontinued 11/2013	Y	Y	Y							
10	WA	N/A	1	03	UMA009	EPA	EPA	Planned summer 2020										
10	ID	160230101	1	03	CRM435	NPS	NPS	Existing NPS site, included w/CASTNET on 11/1/2019									Y	Y
10	ID	160499991	1	03	NPT006	EPA	EPA	Site started on 9/2016							Y	Y	Y	Y
								Network Ozone Sites ⁴	77	62	78	78	77	77	79	80	83	84
								Network SO ₂ Sites			2	2	2	2	1	2	2	1
								Network CO Sites			1	1	1	1	1	2	2	1

¹ See Appendix I for details on PQAO

²Year column indicates monitor may be compared to the NAAQS for that year

³ Bold font indicates status change to the monitor for the upcoming year

⁴ Network Total Sites does not include the three NAAQS-excluded monitors used for quality assurance purposes (ROM206, MCK231, and DUK008)

Appendix H. CBSA Code and Title for CASTNET Sites

EPA RGN	AQS ID	РОС	CASTNET ID	STATE	COUNTY	O ₃ DV PPB ¹	CBSA ²	POP. ³
1	090159991	1	ABT147	СТ	Windham	71	Worcester, MA-CT	930,473
1	230039991	1	ASH135	ME	Aroostook	52		
1	230090103	1	ACA416	ME	Hancock	63		
1	230199991	1	HOW132	ME	Penobscot	NA	Bangor, ME	153,414
1	330099991	1	WST109	NH	Grafton	56	Claremont-Lebanon, NH-VT	217,634
2	340219991	1	WSP144	NJ	Mercer	74	Trenton, NJ	371537
2	360319991	1	HWF187	NY	Essex	56		
2	361099991	1	CTH110	NY	Tompkins	63	lthaca, NY	104,691
3	240199991	1	BWR139	MD	Dorchester	66	Cambridge, MD	32,578
3	240339991	1	BEL116	MD	Prince George's	71	Washington-Arlington- Alexandria, DC-VA-MD-WV	6,033,737
3	420019991	1	ARE128	PA	Adams	66	Gettysburg, PA	101,714
3	420279991	1	PSU106	PA	Centre	64	State College, PA	158,742
3	420479991	1	KEF112	PA	Elk	65	St. Mary's, PA	
3	420859991	1	MKG113	PA	Mercer	65	Youngstown-Warren- Boardman, OH-PA	553,263
3	421119991	1	LRL117	PA	Somerset	65	Somerset, PA	76,218
3	510719991	1	VPI120	VA	Giles	62	Blacksburg-Christiansburg- Radford, VA	181,605
3	511130003	1	SHN418	VA	Madison	63		
3	511479991	1	PED108	VA	Prince Edward	60		
3	540219991	1	CDR119	WV	Gilmer	58		
3	540939991	1	PAR107	WV	Tucker	61		
4	010499991	1	SND152	AL	DeKalb	62	Fort Payne, AL	
4	120619991	1	IRL141	FL	Indian River	63	Sebastian-Vero Beach, FL	144,755
4	120779991	1	SUM156	FL	Liberty	57		
4	132319991	1	GAS153	GA	Pike	N/A	Atlanta-Sandy Springs- Marietta, GA	5,614,323
4	210610501	1	MAC426	КҮ	Edmonson	63	Bowling Green, KY	165,732
4	211759991	1	CKT136	КҮ	Morgan	64		
4	212219991	1	CDZ171	КҮ	Trigg	62	Clarksville, TN-KY	278,353
4	212299991	1	MCK131	КҮ	Washington	64		
4	212299991	2	MCK231	КҮ	Washington	NA		
4	281619991	1	CVL151	MS	Yalobusha	55		
4	370119991	1	PNF126	NC	Avery	NA		
4	370319991	1	BFT142	NC	Carteret	NA	Morehead City, NC	68,811
4	371139991	1	COW137	NC	Macon	61		
4	371239991	1	CND125	NC	Montgomery	NA		
4	470090101	1	GRS420	TN	Blount	67	Knoxville, TN	857,585
4	470259991	1	SPD111	TN	Claiborne	63		
4	470419991	1	ESP127	TN	DeKalb	61		
5	170191001	1	BVL130	IL	Champaign	65	Champaign-Urbana, IL	237,252
5	170859991	1	STK138	IL	Jo Daviess	65		
5	171199991	1	ALH157	IL	Madison	68	St. Louis, MO-IL	2,806,207
5	180839991	1	VIN140	IN	Knox	69	Vincennes, IN	37,938
5	181699991	1	SAL133	IN	Wabash	70 Wabash, IN		32,252
5	261579991	1	UVL124	MI	Tuscola	66		
5	261619991	1	ANA115	MI	Washtenaw	71	Ann Arbor, MI	356,874

5	261659991	1	HOX148	MI	Wexford	67	Cadillac, MI	47,923
5	271370034	1	VOY413	MN	St. Louis	55	Duluth, MN-WI	280,218
5	390179991	1	OXF122	ОН	Butler	70	Cincinnati-Middletown, OH- KY-IN	2,149,449
5	390479991	1	DCP114	ОН	Fayette	65	Washington Court House, OH	28,800
5	391219991	1	QAK172	ОН	Noble	63		
5	551199991	1	PRK134	WI	Taylor	62		
6	050199991	1	CAD150	AR	Clark	58	Arkadelphia, AR	22,576
6	35XXXXXX	Х	XXXXX	NM	Eddy	N/A	N/A	
6	350450020	1	CHC432	NM	San Juan	N/A	Farmington, NM	123,785
6	400019009	1	CHE185	ОК	Adair	59		
6	480430101	1	BBE401	ТΧ	Brewster	63		
6	483739991	1	ALC188	ТΧ	Polk	60		
6	483819991	1	PAL190	ТΧ	Randall	68	Amarillo, TX	259,885
7	311079991	1	SAN189	NE	Knox	65		
8	080519991	1	GTH161	СО	Gunnison	65		
8	080690007	1	ROM406	СО	Larimer	70	Fort Collins-Loveland, CO	324,122
8	080690007	3	ROM206	СО	Larimer	NA	Fort Collins-Loveland, CO	324,122
8	080830101	1	MEV405	СО	Montezuma	68		
8	300298001	1	GLR468	MT	Flathead	52	Kalispell, MT	94,924
8	380070002	1	THR422	ND	Billings	59	Dickinson, ND	30,372
8	460330132	3	WNC429	SD	Custer	62	Rapid City, SD	143,638
8	490370101	1	CAN407	UT	San Juan	65		
8	490471002	1	DIN431	UT	Uintah	72	Vernal, UT	36,86
8	490530130	1	ZIO433	UT	Washington	66	St. George, UT	
8	560019991	1	CNT169	WY	Albany	66	Laramie, WY	37,811
8	560030002	1	BAS601	WY	Big Horn	N/A		
8	560359991	1	PND165	WY	Sublette	64		
8	560390008	1	GRT434	WY	Teton	60		
8	560391011	1	YEL408	WY	Teton	62	Jackson, WY-ID	33,271
8	560450003	1	NEC602	WY	Weston	N/A		
9	040038001	1	CHA467	AZ	Cochise	66	Sierra Vista-Douglas, AZ	127,448
9	040058001	1	GRC474	AZ	Coconino	65	Flagstaff, AZ	137,682
9	040170119	1	PET427	AZ	Navajo	65	Show Low, AZ	108,101
9	060430003	1	YOS404	CA	Mariposa	79		
9	060690003	1	PIN414	CA	San Benito	68	San Jose-Sunnyvale-Santa Clara, CA	1,952,872
9	060719002	1	JOT403	CA	San Bernardino	89	Riverside-San Bernardino- Ontario, CA	4,441,890
9	060893003	1	LAV410	CA	Shasta	68	Redding, CA	179,804
9	061070009	1	SEK430	CA	Tulare	89	Visalia-Porterville, CA	458,198
9	320330101	1	GRB411	NV	White Pine	66		
10	020680003	1	DEN417	AK	Denali	50		
10	530531010	1	MOR409	WA	Pierce	NA	Seattle-Tacoma-Bellevue, WA	3,671,478
10	53XXXXXXX	X	UMA009	WA				
10	160230101	1	CRM435	ID	Butte	63	Idaho Falls, ID	
10	160499991	1	NPT006	ID	Idaho			

¹ Design values are displayed for the 2016-2018 sampling period when data completeness requirements are satisfied. These values originate from OAQPS' Air Trends website: http://epa.gov/airtrends/values.html

² CBSA = Core Based Statistical Area - A statistical geographic entity consisting of the county or counties associated with at least one core (urbanized area or urban cluster) of at least 10,000 population, plus adjacent counties having a high degree of social and economic integration with the core as measured through commuting ties with the counties containing the core.

Definitions of statistical areas are from the Office of Management and Budget Federal Register Notice Vol 65, No. 249. December 27, 2000.

https://www.bls.gov/lau/frn249.pdf

³POP. = CBSA 2014 Census from OAPQS' AIRSRAQS.CORE_BASED_STATISTICAL_AREAS Census Population Data

Appendix I. Summary of Current CASTNET Ozone and Trace-level Gas Monitors

2020 SUMMARY

PQAO ¹	PQAO Name	O₃ Sites	SO ₂	со
1344	Environmental Protection Agency – Clean Air Markets Division	54 ²	1	1
0745	National Park Service – Air Resources Division	26		
1366	Bureau of Land Management – Wyoming State Office	2		
905	Cherokee Nation	1		
0973	South Dakota – Department of Environment and Natural Resources	1		
0782	North Dakota – Department of Health	1		
0635	Maine Department of Environmental Protection – Bureau of Air	1		
	Quality Control			
	Total	86	1	1

¹ Principal Quality Assurance Organization (PQAO) as identified within the AQS AMP480 report.

² EPA-CAMD's site count of 54 includes three NAAQS Excluded ozone monitors: the EPA-sponsored QA monitor in Rocky Mountain National Park, CO (ROM206), the collocated QA monitor in Mackville, KY (MCK231), and the ozone monitor sited above a forest canopy in Duke Forest, NC (DUK008).

Appendix J. CASTNET Parameter Key

CASTNET Parameter	Site List
BLM Small Footprint Filterpack and	BUF603, FOR605, SHE604
Meteorology	
BLM Small Footprint Filterpack,	BAS601, NEC602
Ozone, and Meteorology	
EPA Co-located Pair with Filterpack	MCK131/MCK231
and Ozone	
EPA Filterpack and Ozone	ABT147, ALC188, ALH157, ANA115, ARE128, ASH135, BFT142, BWR139, CAD150, CDR119,
	CDZ171, CKT136, CND125, CNT169, COW137, CTH110, CVL151, DCP114, ESP127, GAS153,
	GTH161, HOX148, KEF112, LRL117, MKG113, NPT006, OXF122, PAL190, PAR107, PED108,
	PRK134, PSU106, QAK172, SAL133, SAN189, SND152, SPD111, STK138, SUM156, UVL124,
	VIN140, VPI120, WSP144, WST109
EPA Filterpack, Non-Regulatory	DUK008
Ozone, and Trace-level Gas	
EPA Filterpack, Ozone,	BVL130, PND165
Meteorology, and Trace-level Gas	
EPA Filterpack, Ozone, and	BEL116, CHE185, IRL141
Meteorology	
EPA Filterpack, Ozone, and Trace-	HWF187, PNF126
level Gas	
EPA Small Footprint Filterpack	CAT175, EGB181, KIC003, KNZ184, NIC001, RED004, UND002, WFM105
NCore Participant	ACA416, BVL130, CHE185, GRS420, UND002
NPS Filterpack and Meteorology	EVE419
NPS Filterpack, Ozone,	GRS420, MAC426
Meteorology, and Trace-level Gas	
NPS Filterpack, Ozone, and	ACA416, BBE401, CAN407, CHA467, DEN417, DIN431, GLR468, GRB411, GRC474, JOT403,
Meteorology	LAV410, MEV405, PET427, PIN414, SEK430, SHN418, THR422, VOY413, WNC429, YEL408,
	YOS404
NPS Ozone and Meteorology	CRM435, DEV412, GRT434, ZIO433
NPS Ozone, Meteorology, and	CHC432
Trace-level Gas	
NPS/EPA Co-located Pair with EPA	ROM406/ROM206
Filterpack, Ozone, and Trace-level Gas	