

**Standard Operating Procedure for
Analysis of US EPA Geospatial
Measurement of Air Pollution-
Remote Emission Quantification
by Direct Assessment (GMAP-REQ-
DA) Method Data for Methane
Emission Rate Quantification
using the Point Source Gaussian
Method**

**U.S. EPA Office of Research and Development
National Risk Management Research Laboratory
Air Pollution Prevention and Control Division**

Prepared by: _____
Date

Reviewed by: _____
Date

Approved by: _____
Date

TABLE OF CONTENTS

1.0 Overview	3
2.0 Point Source Gaussian Emission Quantification Method	5
3.0 Utilizing the Point Source Gaussian Method to Calculate Emission Rates	10
3.1 Converting Raw Data Output Files	10
3.2 Initializing the <i>PG_Analysis_Methane_CSV</i> Program for Emissions Calculations	12
3.3 Running the <i>PG_Analysis_Methane_CSV</i> Program for Emissions Calculations	14
4.0 Wind Rose/Concentration Plot Quality Assurance Program	17

Tables

Table A-1. Point Source Dispersion Table for Determining Value of Sigma-Y (meters)	22
Table A-2. Point Source Dispersion Table for Determining Value of Sigma-Z (meters)	28

Figures

Figure 1. Gaussian Fit of Methane Concentration as a Function of Wind Direction	8
Figure 2. File Translator Program Main Screen Showing Selection of File for Conversion	11
Figure 3. File Translator Program Main Screen Showing Confirmation of File Conversion	12
Figure 4. Screenshot of Parameter.xls User Input Spreadsheet	13
Figure 5. Screenshot from <i>PG_Analysis</i> program showing initiation of the program	15
Figure 6. Screenshot of <i>WindCH4Source.m</i> Program Code	18
Figure 7. Example CH4Source Plot from the <i>WindCH4Source.m</i> Program	19
Figure 8. Example WindHist Plot from the <i>WindCH4Source.m</i> Program	20

Appendices

Appendix A: Point Source Dispersion Table for Determining the Values
of σ_y and σ_z

Appendix B: PG_Analysis_Methane_CSV Program Code

Appendix C: Example STR Data Output File in .csv Format

Appendix D: Example Emissions Calculation Output File

Appendix E: WindCH4Source.m Program Code

Standard Operating Procedure for Analysis of US EPA Geospatial Measurement of Air Pollution-Remote Emission Quantification by Direct Assessment (GMAP-REQ-DA) Method Data for Methane Emission Rate Quantification using the Point Source Gaussian Method

Scope: The following protocol describes procedures for analysis of data collected with the US EPA Geospatial Measurement of Air Pollution-Remote Emission Quantification-Direct Assessment (GMAP-REQ-DA) technique to yield methane emission rates using the Point Source Gaussian (PSG) method. This protocol provides guidance on preparing input data files for use with the PSG software program, importing the input files into the software, and instructions for processing the data.

Purpose: To provide specific guidance on analyzing data collected with the GMAP-REQ-DA technique to yield methane emission rates using the PSG method.

1.0 Overview

The US EPA Geospatial Measurement of Air Pollution-Remote Emission Quantification by Direct Assessment (GMAP-REQ-DA) mobile measurement system has been developed as a tool to assess emissions of air pollutants from distributed point sources. The system consists of a fast-response methane analyzer, global positioning system (GPS), and wind monitors, installed in a measurement vehicle. The integrated system uses customized software to control operation of instrumentation, and acquisition of data. The system has been previously deployed to assess emissions at upstream oil and gas production sites, but has utility for monitoring emissions from other emission sources. During the measurement campaigns, the system is deployed to assess emissions from multiple potential sources, on a site-by-site basis.

Data elements collected with the GMAP-REQ-DA technique include target analyte concentration, GPS data, 3-D Sonic Anemometer data, and AIO Compact Weather Station data. The GMAP-REQ-DA data elements are used to calculate total site emission rates. The current document describes the procedures for calculating methane emission rates using the Point Source Gaussian (PSG) approach. The PSG approach utilizes a MATLAB[®]-based analysis program developed by EPA ORD NRMRL and ARCADIS. The program is used to pre-process raw data collected during the measurement surveys, create data input files for the PSG algorithm, and to calculate methane emission rate estimates from the survey sites. Section 2.0 of this document presents details on the PSG

algorithm, and Section 3.0 provides procedures for using the analysis software for calculating emission rates. Section 4.0 describes a quality-assurance tool used to assess the location of detected emission sources.

2.0 Point Source Gaussian Emission Quantification Method

Prior to analysis of raw data collected in the field, the MATLAB®-based Point Source Gaussian analysis program is used to pre-process the data. The first step in pre-processing the data is to time-align the raw data to correct for the delay time it takes for the sample to reach the analyzer through the sampling line. The exact delay time is determined by conducting delay tests in the field as part of the in-field calibration checks. The delay time will vary slightly for each site, so the response tests should be conducted on the first day of each measurement campaign. After the delay time has been determined, it is input to the analysis software, and the software performs the time alignment correction (instructions for inputting the delay time to the analysis software are discussed in Section 3).

The second step in pre-processing the data is to rotate the 3-D Sonic Anemometer data to streamlined coordinates. The anemometer outputs velocity data in the u , v , and w coordinates. The coordinate system is first rotated through the angle formed by the average wind velocity in the u and v directions, as shown in Equation 1 below:

$$\theta_1 = \tan^{-1} \left(\frac{\text{avg } u}{\text{avg } v} \right) \quad (1)$$

The rotated average velocity values (u' , v') from the original coordinate system are calculated using the following rotation matrix:

$$\begin{bmatrix} v' \\ u' \end{bmatrix} = \begin{bmatrix} \cos(\theta_1) & \sin(\theta_1) \\ -\sin(\theta_1) & \cos(\theta_1) \end{bmatrix} \begin{bmatrix} v \\ u \end{bmatrix} \quad (2)$$

The coordinate system is then rotated through the angle formed by the average wind velocity in the v and w directions:

$$\theta_2 = \tan^{-1} \left(\frac{\text{avg } w}{\text{avg } v'} \right) \quad (3)$$

The rotated average velocity values (v'' , w') are calculated using the following rotation matrix:

$$\begin{bmatrix} v'' \\ w' \end{bmatrix} = \begin{bmatrix} \cos(\theta_2) & \sin(\theta_2) \\ -\sin(\theta_2) & \cos(\theta_2) \end{bmatrix} \begin{bmatrix} v' \\ w \end{bmatrix} \quad (4)$$

In the revised coordinate system, $v'' = v$; $u' = u$; $w' = w$

The rotated wind speed value is expressed as:

$$WS = \sqrt{v^2 + u^2} \quad (5)$$

The rotated 3-dimensional azimuthal wind direction is expressed as:

$$WD = 180 + \left[a \tan 2 \left(\frac{\text{avg } u}{\text{avg } v} \right) * \frac{180}{\pi} \right] \quad (6)$$

The rotation calculations are performed automatically by the analysis software after the raw data files are input to the program.

After pre-processing has been completed, the software is used to determine the local stability class of wind conditions during the time of the stationary measurements. The local wind stability class is determined by the analysis software using the standard deviation of 2-dimensional wind direction and turbulent intensity (ratio of the standard deviation of the wind speed to the average wind speed). When determining the local wind stability class based on the standard deviation of 2-dimensional wind direction (*StdWD*), the following relationships are used:

Stability Class = 1 if *StdWD* > 27.50°
Stability Class = 2 if 23.50° < *StdWD* ≤ 27.50°
Stability Class = 3 if 19.50° < *StdWD* ≤ 23.50°
Stability Class = 4 if 15.50° < *StdWD* ≤ 19.50°
Stability Class = 5 if 11.50° < *StdWD* ≤ 15.50°
Stability Class = 6 if 7.50° < *StdWD* ≤ 11.50°
Stability Class = 7 if *StdWD* ≤ 7.50°

When determining the local wind stability class based on the turbulent intensity (*turbu int*), the following relationships are used:

Stability Class = 1 if *turbu int* > 0.205
Stability Class = 2 if 0.180 < *turbu int* ≤ 0.205
Stability Class = 3 if 0.155 < *turbu int* ≤ 0.180
Stability Class = 4 if 0.130 < *turbu int* ≤ 0.155
Stability Class = 5 if 0.105 < *turbu int* ≤ 0.130
Stability Class = 6 if 0.08 < *turbu int* ≤ 0.105
Stability Class = 7 if *turbu int* ≤ 0.080

The average local wind stability class (pgi) is defined as the average of the stability class determinations based on the standard deviation of 2-dimensional wind direction and the turbulent intensity parameter. The average local wind stability class for a particular stationary survey is classified using the following table, where Class 1 represents extremely unstable wind conditions, and Class 7 represents extremely stable wind conditions.

Stability Class = 1 if $pgi < 1.5$

Stability Class = 2 if $1.50 \leq pgi < 2.5$

Stability Class = 3 if $2.50 \leq pgi < 3.50$

Stability Class = 4 if $3.50 \leq pgi < 4.50$

Stability Class = 5 if $4.50 \leq pgi < 5.50$

Stability Class = 6 if $5.50 \leq pgi < 6.50$

Stability Class = 7 if $pgi \geq 6.50$

After the local wind stability class has been determined, the values of horizontal (σ_y) and vertical (σ_z) dispersion are determined from point source dispersion tables using the measured source distance and the determined average local wind stability class. The tables used for determining the values of σ_y and σ_z are presented in Appendix A of this document.

Next, the analysis software determines the average background methane concentration by calculating the average of the lowest 5% of all methane concentration values collected during the survey. The background concentration value is then subtracted from all concentration data collected during the survey. The concentration data are then sorted into 5-degree incremental bins based on wind direction during the time of the measurements, and the average methane concentration for each bin is calculated. The plot of concentration versus wind direction is then fitted to a Gaussian function during the stationary survey. Prior to performing the Gaussian fit, the software utilizes a "cut filter" value of 2%. In this approach, data from a particular bin are removed from the analysis if the total number of data points in any particular bin is not greater than 2% of the total number of data points collected during the survey. The peak value of the Gaussian fit is the peak methane concentration (**a1** parameter), which is used in the calculation of plane-integrated methane concentration. Figure 1 below presents an example plot of methane concentration data as a function of prevailing wind direction, fitted using a Gaussian function. The plot shows the determined **a1** value as 2.53 ppm.

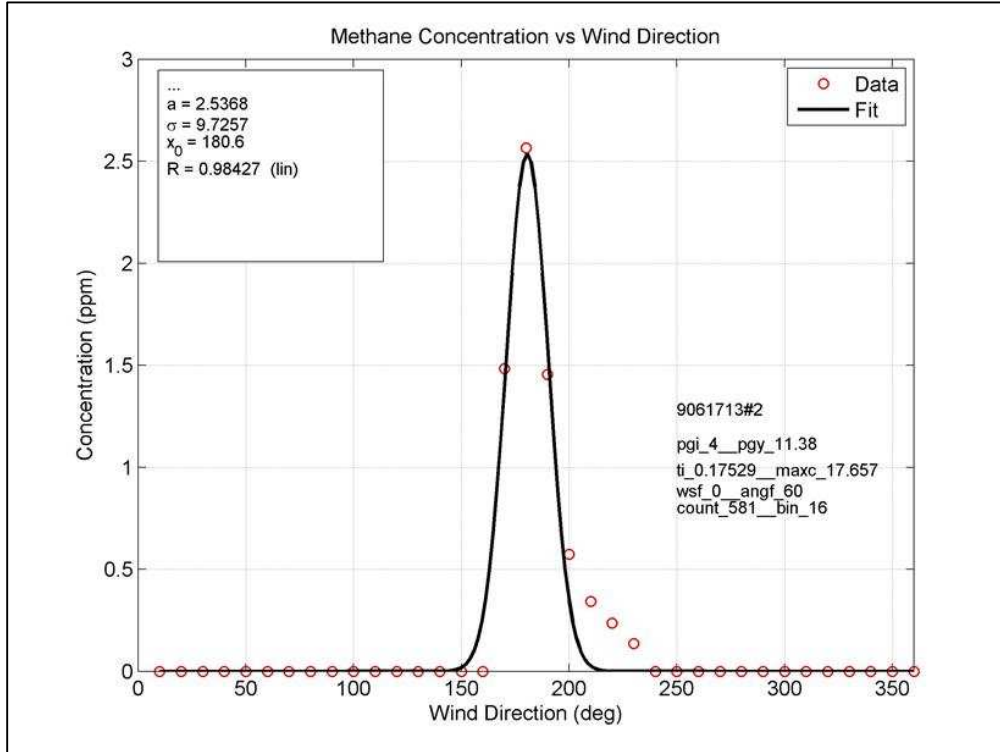


Figure 1. Gaussian Fit of Methane Concentration as a Function of Wind Direction

After the peak methane concentration (**a1**) has been determined, it is converted from units of ppmv to units of grams per cubic meter. The plane-integrated methane concentration is then determined using the following two-dimensional Gaussian integration:

$$G(y,z)=a1 \times \iint \exp\left(-\frac{(y)^2}{2\sigma_y^2} - \frac{(z)^2}{2\sigma_z^2}\right) = 2\pi \times a1 \times \sigma_y \times \sigma_z \tag{7}$$

Where:

y= crosswind distance (m)

z= vertical distance (m)

a1= peak average methane concentration (g/m³) as determined by Gaussian fit

σ_y = standard deviation of the crosswind plume concentration (m)

σ_z = standard deviation of the vertical plume concentration (m)

This expression is multiplied by the calculated wind speed during the survey (determined using Equation 5) to yield the estimated emission rate (in grams per second) of the target compound.

3.0 Utilizing the Point Source Gaussian Method to Calculate Emission Rates

The PSG approach utilizes a MATLAB[®]-based analysis program developed by EPA ORD NRMRL and ARCADIS. The program, called *PG_Analysis_Methane_CSV*, is utilized to perform all of the pre-processing steps described in Section 2.0, and calculate the emission flux in g/s from a given source located a certain distance away from the measurement location. The program is also capable of reading .csv files in the U.S. EPA Retigo format. The *PG_Analysis_Methane_CSV* program code is presented in Appendix B of this document.

3.1 Converting Raw Data Output Files

Prior to executing the *PG_Analysis_Methane_CSV* software, the raw data output files created by the GMAP-REQ-DA data acquisition software (ST files) for each site survey from a particular measurement campaign must be converted from .tdms format, to STR files in .csv format. The file conversion is done utilizing the *TDMS to CSV TranslatorRev 1.2.2. Build 5/28/2013* program. Data files are converted using the following steps:

1. Open the *TDMS to CSV TranslatorRev 1.2.2. Build 5/28/2013* program. The program main screen will be displayed.
2. Select the data file to be converted by clicking the "browse" icon, located to the right of the "Path to Single File" box in the program main screen. Select the desired file and hit OK as shown in Figure 2.

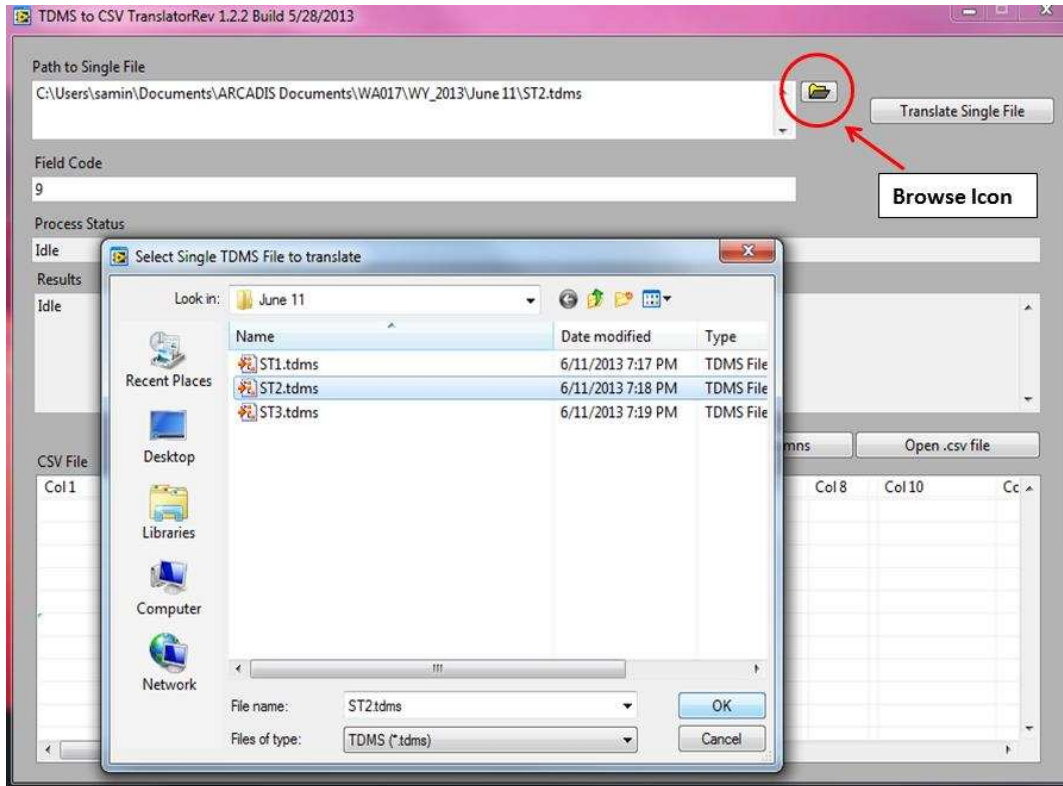


Figure 2. File Translator Program Main Screen Showing Selection of File for Conversion

1. Under the "Field Code", enter the name of the field study.
2. Click on the "Translate Single File" tab located in the top right corner of the main screen, as shown in Figure 2.
3. The program will begin creating a new STR file in .csv format for each site survey from the particular measurement campaign. After the new file has been created, a confirmation message will appear in the "Results" box on the program main screen, as shown in Figure 3. The new file is created in the same folder as the original .tdms file.

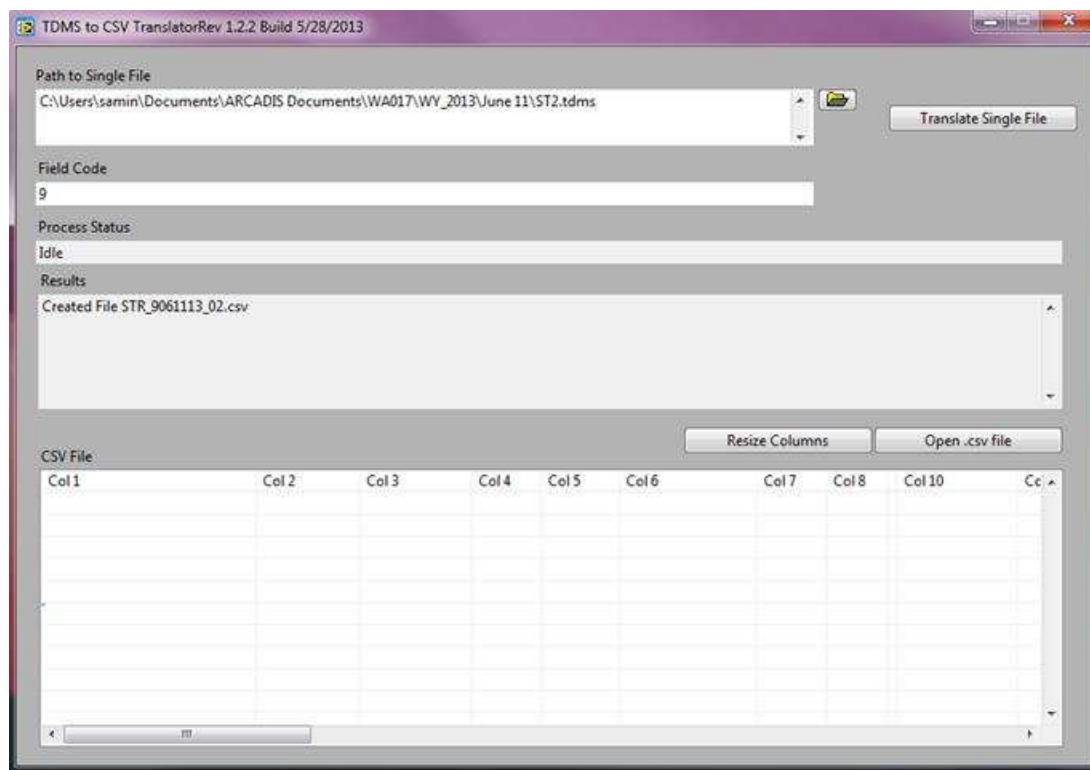


Figure 3. File Translator Program Main Screen Showing Confirmation of File Conversion

An example STR data output file in .csv format is shown in Appendix C of this document.

3.2 Initializing the *PG_Analysis_Methane_CSV* Program for Emissions Calculations

After all raw data output files from a field study have been converted to STR files in .csv format, create a project folder on the C: drive of the computer being used for data analysis. The folder can be labeled using any name convenient to identify the measurement project. Create a subfolder within the project folder named "Analysisfiles". Copy and paste all converted .csv STR files into the "Analysisfiles" subfolder. The subfolder should also contain the *PG_Analysis_Methane_CSV* MATLAB® code to analyze the data, and all the associated files necessary to run the *PG_Analysis_Methane_CSV* program.

Prior to initiating the program to calculate emission rates, it is necessary to input several parameters that the program uses in the emission calculation. These parameters are input to a user input spreadsheet, *Parameter.xls*, shown in Figure 4.

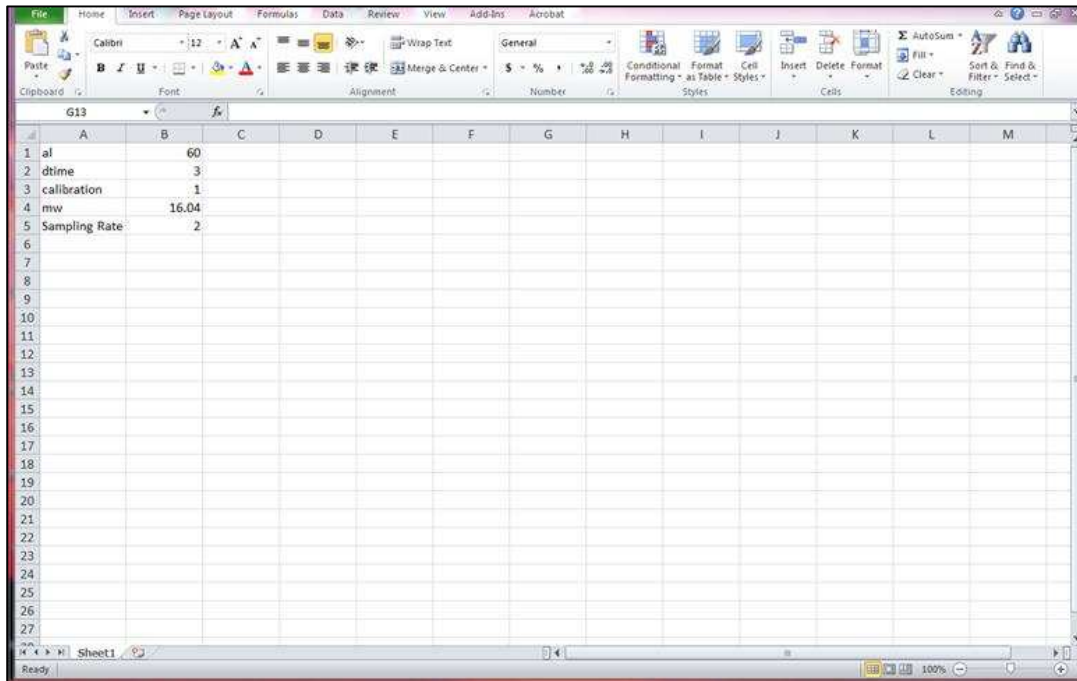


Figure 4. Screenshot of Parameter.xls User Input Spreadsheet

The first parameter, **al**, is the wind direction angle filter (in degrees). This parameter allows the user to filter data used in the emission calculation based on the prevailing wind direction during the time the data was collected. For example, a wind direction angle filter of 60° would direct the emissions calculation program to use data from time periods only when the prevailing wind direction was $\pm 60^\circ$ from the compass heading of the source location, with respect to the location of the measurement vehicle. A wind direction angle filter of 180° would direct the program to use all data collected for the emissions calculation (e.g. no wind filter). In preparation for the preliminary run of the *PG_Analysis_Methane_CSV* program for a particular dataset, the **al** parameter should be set to 180° .

The next parameter, **dtime**, is the instrument delay time (in seconds), determined from the delay tests conducted during the measurement campaign, and described in Section 2.

The third parameter, **calibration**, is a calibration factor that can be used to correct concentration data, based on pre-deployment instrument calibration experiments. The default value for this parameter is 1, but this value may be adjusted depending on the results of the calibration experiments (e.g. if the results of the calibration

experiments indicate the analyzer has a 20% bias in concentration measurements, the **calibration** value would be entered as 1.20).

The fourth parameter, **mw**, is the molecular weight of the target compound, in grams/mole. Because this document describes methane emissions calculations, this value is entered as 16.04.

The final parameter, **Sampling Rate**, is the data sampling rate, in Hz, used during the measurement campaign. The default value for this parameter is 2.

After all parameter values are entered into the spreadsheet, the file is saved in the "Analysisfiles" subfolder.

3.3 Running the *PG_Analysis_Methane_CSV* Program for Emissions Calculations

The program is now ready to calculate emission rates from the surveys. Run the program by clicking on the "Debug" icon, and then click on "Run", as shown in Figure 5.

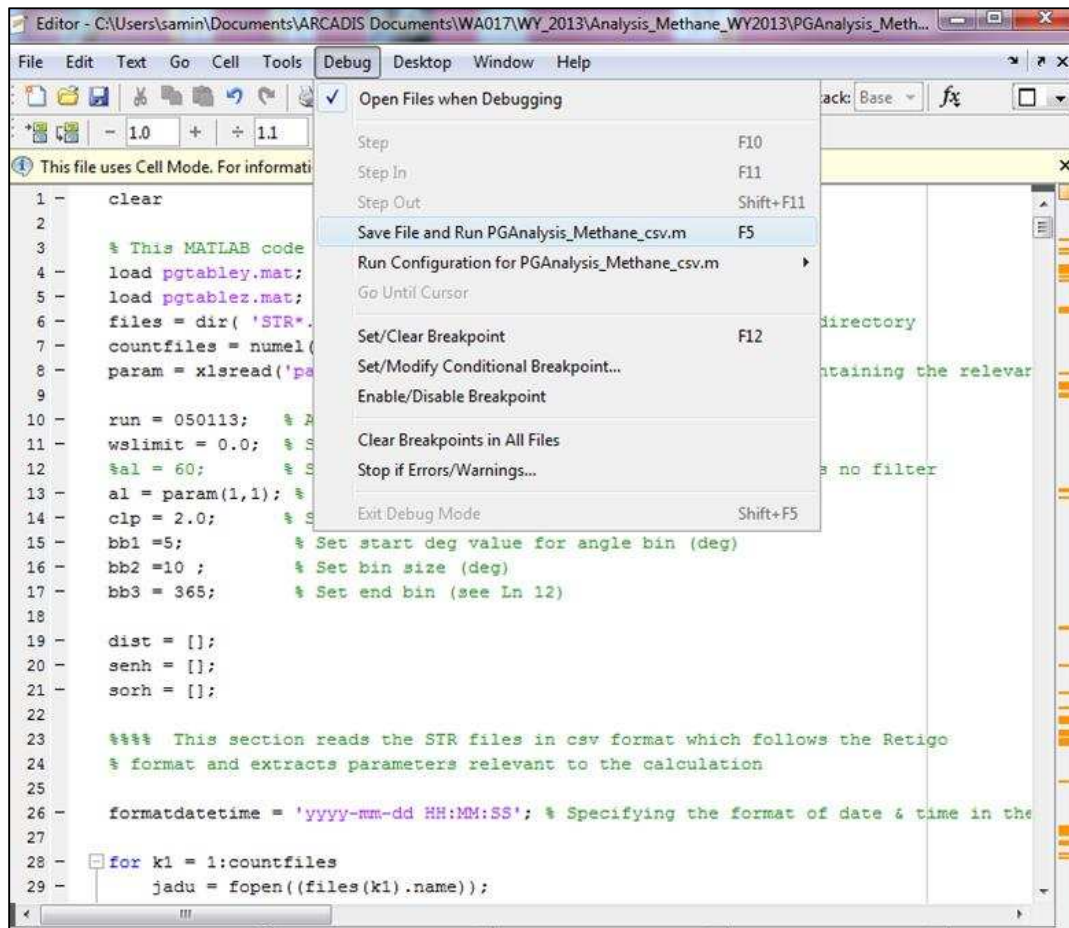


Figure 5. Screenshot from *PG_Analysis* program showing initiation of the program

When the emissions calculations are complete, the program will create a results output file, *Summary_Processed_Methane.xls*, in the "Analysisfiles" subfolder, which includes emission estimate results from all surveys conducted during a particular measurement campaign. An example results output file is shown in Appendix D of this document, including an explanation of all data fields.

In addition to the *Summary_Processed_Methane.xls* file, the program will create a "processed STR" file for each site survey from the measurement campaign. Data in the processed STR file have been time-aligned based on input from the *Parameter.xls* file. Note that the "Analysisfiles" subfolder from a particular measurement campaign will include one *Summary_Processed_Methane.xls* file, and multiple processed STR files (one for each site survey).

Next, open the *Summary_Processed_Methane.xls* file and inspect the values shown in columns **<u>** and **<w>**. All values in each of these columns should be close to "0", indicating that the orientation of the 3-D Sonic Anemometer instrument in the field was correct. After this has been confirmed, re-open and edit the *Parameter.xls* input file (described in Section 3.2) by changing the value of the **al** parameter to the default value of 60°. In the "Analysisfiles" subfolder, select and delete all "processed STR" files. Then, re-run *PG_Analysis_Methane_CSV* program using the procedure described at the beginning of this section. A new *Summary_Processed_Methane.xls* file will be created (overwriting the original file). This will be the final data output results file.

*Note: The *PG_Analysis_Methane_CSV* analysis program is run utilizing a MatLab® platform, and the user must have MatLab® installed on their personal computer to use the program for emissions measurement calculations. The instructions presented in Sections 3.2 and 3.3 are applicable for using the *PG_Analysis_Methane_CSV* program in a MatLab® environment. However, an executable program, *MethaneAnalysis.exe* has been created for users who do not have MatLab® installed on their personal computer. The instructions for using the *MethaneAnalysis.exe* are identical to those presented in Sections 3.2 and 3.3, with the following exceptions:*

1. The *MethaneAnalysis.exe* is installed on a personal computer in a folder called "Methane Analysis", under a subfolder called

"distrib". After all converted .csv STR files have been created (using procedures detailed in Section 3.1), the converted files should be pasted into the "distrib" subfolder. The completed Parameter.xls user input spreadsheet should also be saved in the "distrib" subfolder.

- 2. After the necessary files have been saved in the "distrib" subfolder, the MethaneAnalysis.exe program is run by simply double-clicking on the program icon. The results output file will be created in the "distrib" subfolder.*


4.0 Wind Rose/Concentration Plot Quality Assurance Program

The wind rose/concentration plot quality assurance program creates a plot that displays the measured methane concentrations from each site survey, plotted on a four-quadrant graph, as a function of prevailing wind direction during the measurements. The origin of the graph represents the location of the measurement vehicle during the survey. Methane concentration values are plotted using a color scale, with the highest methane concentrations shown in red and orange colors, the lowest concentrations shown in blue and green, and intermediate concentration values shown in yellow. Concentrations plotted in the northeast quadrant of the graph represent concentrations measured while winds were blowing from the northeast. Concentrations plotted in the southeast quadrant represent measurements with prevailing winds from the southeast, etc. The plot is created to verify the location of the source of emissions detected with the instrumentation (the approximate location of the emissions source is found by starting at the origin of the graph and following the axis of highest methane concentrations, which should terminate in the vicinity of the emissions source). The program also creates a wind direction histogram, showing the frequency of prevailing wind directions.

The plots are created using a custom-designed MatLab[®] based program called *WindCH4Source.m*. The *WindCH4Source.m* program code is presented in Appendix E of this document. The *WindCH4Source.m* is run using the following procedures:

1. Copy all "processed STR" files from the "Analysisfiles" subfolder (discussed in Section 3.3) into a new folder that also includes the *WindCH4Source.m* MATLAB[®] code.
2. The program can be executed using either absolute wind data from the AIO Compact Weather Station, or azimuthal wind direction data from the 3D Sonic Anemometer. The wind direction parameter is represented by the variable "wddir" in the program code, as shown in line 16 of Figure 6. No changes to the program code are necessary to utilize the AIO Compact Weather Station wind data to create the wind rose/concentration plots. However, in order to use the 3D Sonic Anemometer azimuthal wind direction data to change the plots, the program must be modified by deleting the "%" in line 15, and inserting "%" in line 16, before the variable "wddir".

The code is executed by clicking on the "Run" icon, and then clicking on "Run WindCH4Source" from the dropdown menu, as shown in Figure 6.

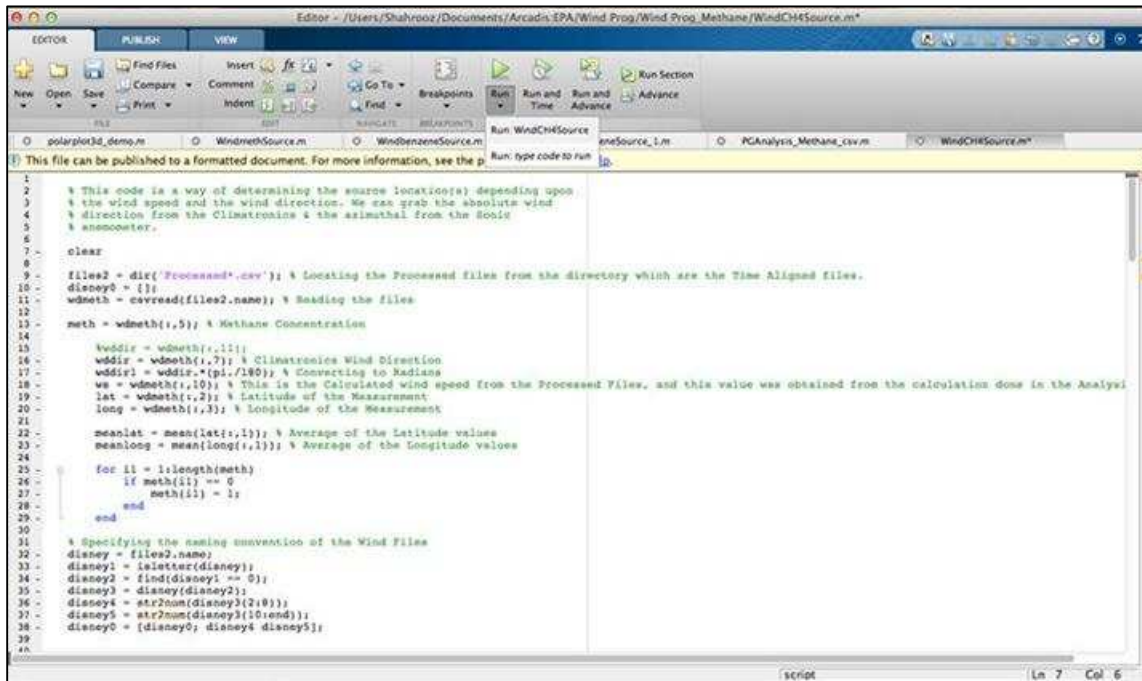

```
1  
2 % This code is a way of determining the source location(s) depending upon  
3 % the wind speed and the wind direction. We can grab the absolute wind  
4 % direction from the Climatronics & the azimuthal from the Solsis  
5 % anemometer.  
6  
7 -  
8 clear  
9 - files2 = dir('Processand*.csv'); % Locating the Processed files from the directory which are the Time Aligned files.  
10 - disney0 = {};  
11 - wdmeth = csvread(files2.name); % Reading the files  
12 -  
13 - meth = wdmeth(:,5); % Methane Concentration  
14 -  
15 - wddir = wdmeth(:,11);  
16 - wddir = wddir(:,7); % Climatronics Wind Direction  
17 - wddir = wddir.*(pi/180); % Converting to Radians  
18 - ws = wdmeth(:,10); % This is the Calculated wind speed from the Processed Files, and this value was obtained from the calculation done in the Analysis  
19 - lat = wdmeth(:,2); % Latitude of the Measurement  
20 - long = wdmeth(:,3); % Longitude of the Measurement  
21 -  
22 - meanlat = mean(lat(:,1)); % Average of the Latitude values  
23 - meanlong = mean(long(:,1)); % Average of the Longitude values  
24 -  
25 - for il = 1:length(meth)  
26 -     if meth(il) == 0  
27 -         meth(il) = 1;  
28 -     end  
29 - end  
30 -  
31 - % Specifying the naming convention of the Wind Files  
32 - disney = files2.name;  
33 - disney1 = isletter(disney);  
34 - disney2 = find(disney1 == 0);  
35 - disney3 = disney(disney2);  
36 - disney4 = str2num(disney3(2:8));  
37 - disney5 = str2num(disney3(10:end));  
38 - disney0 = [disney0; disney4 disney5];  
39 -  
40 -
```

Figure 6. Screenshot of *WindCH4Source.m* Program Code

The *WindCH4Source.m* program creates plots for each processed STR file (each site survey from a particular measurement campaign), a *CH4Source* file (shown in Figure 7), and a *WindHist* file (shown in Figure 8). The *CH4Source* file is used to confirm the location of the emissions source, with respect to the location of the measurement vehicle.

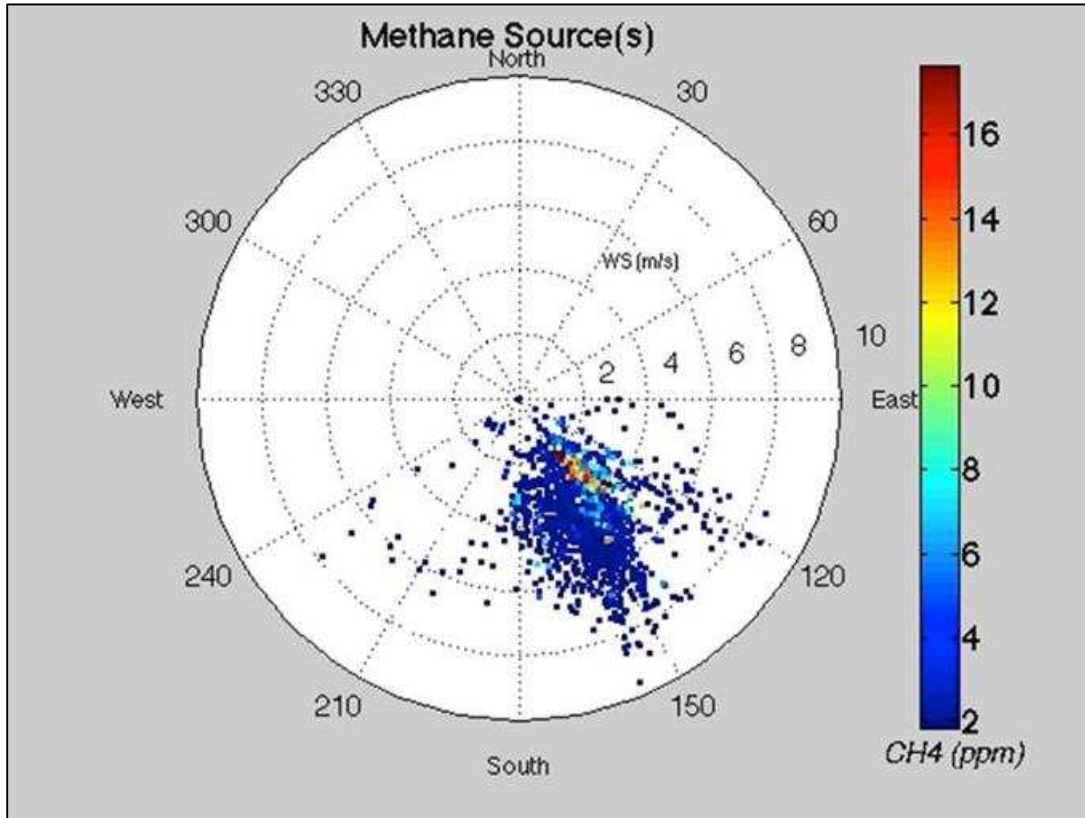


Figure 7. Example CH4Source Plot from the *WindCH4Source.m* Program

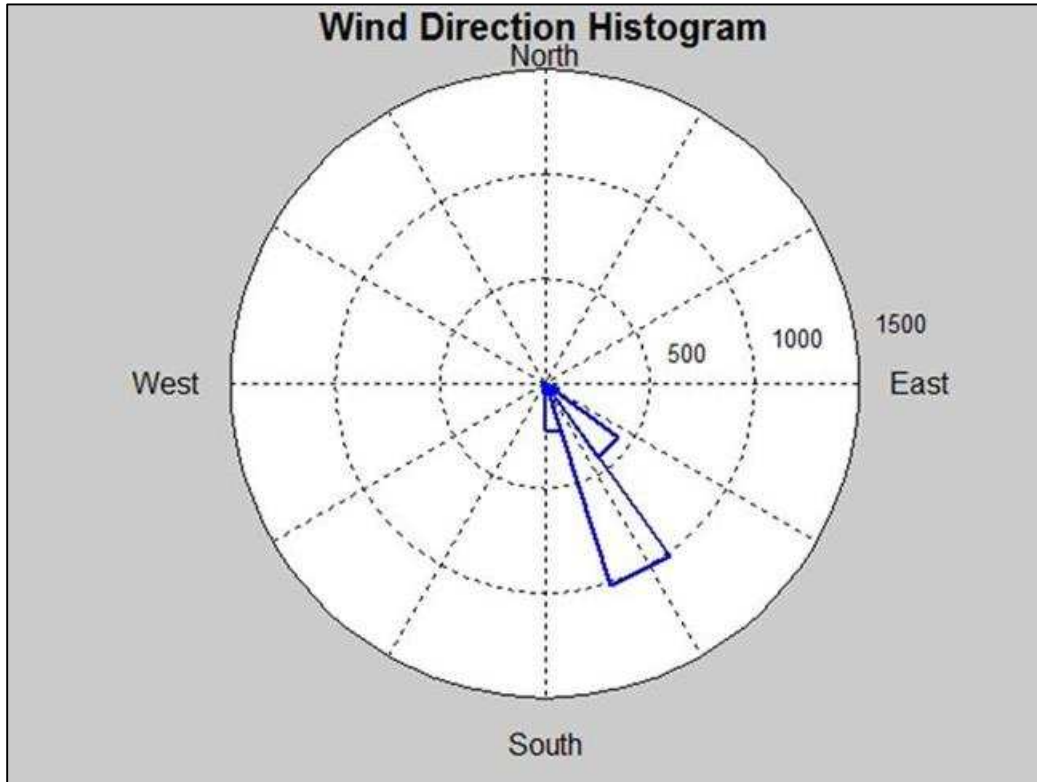


Figure 8. Example WindHist Plot from the *WindCH4Source.m* Program

Appendix A:
Point Source Dispersion Table
for Determining the Values of σ_y
and σ_z

Table A-1. Point Source Dispersion Table for Determining Value of Sigma-Y (meters)

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
1	2.32	1.89	1.46	1.14	0.83	0.68	0.53
2	2.56	2.10	1.63	1.29	0.94	0.78	0.61
3	2.80	2.31	1.81	1.43	1.06	0.87	0.68
4	3.05	2.52	1.99	1.58	1.18	0.97	0.76
5	3.29	2.73	2.16	1.73	1.29	1.06	0.84
6	3.53	2.94	2.34	1.87	1.41	1.16	0.91
7	3.78	3.15	2.52	2.02	1.52	1.26	0.99
8	4.02	3.36	2.69	2.17	1.64	1.35	1.07
9	4.26	3.57	2.87	2.31	1.75	1.45	1.14
10	4.50	3.78	3.05	2.46	1.87	1.54	1.22
11	4.75	3.99	3.22	2.60	1.99	1.64	1.29
12	4.99	4.20	3.40	2.75	2.10	1.74	1.37
13	5.23	4.41	3.58	2.90	2.22	1.83	1.45
14	5.48	4.62	3.75	3.04	2.33	1.93	1.52
15	5.72	4.83	3.93	3.19	2.45	2.02	1.60
16	5.96	5.04	4.11	3.34	2.56	2.12	1.68
17	6.21	5.25	4.28	3.48	2.68	2.22	1.75
18	6.45	5.46	4.46	3.63	2.80	2.31	1.83
19	6.69	5.66	4.64	3.77	2.91	2.41	1.91
20	6.93	5.87	4.81	3.92	3.03	2.50	1.98
21	7.18	6.08	4.99	4.07	3.14	2.60	2.06
22	7.42	6.29	5.17	4.21	3.26	2.70	2.14
23	7.66	6.50	5.35	4.36	3.37	2.79	2.21
24	7.91	6.71	5.52	4.51	3.49	2.89	2.29
25	8.15	6.92	5.70	4.65	3.61	2.99	2.36
26	8.39	7.13	5.88	4.80	3.72	3.08	2.44
27	8.64	7.34	6.05	4.94	3.84	3.18	2.52
28	8.88	7.55	6.23	5.09	3.95	3.27	2.59
29	9.12	7.76	6.41	5.24	4.07	3.37	2.67
30	9.36	7.97	6.58	5.38	4.18	3.47	2.75
31	9.61	8.18	6.76	5.53	4.30	3.56	2.82
32	9.85	8.39	6.94	5.68	4.42	3.66	2.90
33	10.09	8.60	7.11	5.82	4.53	3.75	2.98

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
34	10.34	8.81	7.29	5.97	4.65	3.85	3.05
35	10.58	9.02	7.47	6.11	4.76	3.95	3.13
36	10.82	9.23	7.64	6.26	4.88	4.04	3.20
37	11.07	9.44	7.82	6.41	4.99	4.14	3.28
38	11.31	9.65	8.00	6.55	5.11	4.23	3.36
39	11.55	9.86	8.17	6.70	5.23	4.33	3.43
40	11.79	10.07	8.35	6.85	5.34	4.43	3.51
41	12.04	10.28	8.53	6.99	5.46	4.52	3.59
42	12.28	10.49	8.70	7.14	5.57	4.62	3.66
43	12.52	10.70	8.88	7.28	5.69	4.71	3.74
44	12.77	10.91	9.06	7.43	5.80	4.81	3.82
45	13.01	11.12	9.23	7.58	5.92	4.91	3.89
46	13.25	11.33	9.41	7.72	6.04	5.00	3.97
47	13.50	11.54	9.59	7.87	6.15	5.10	4.05
48	13.74	11.75	9.77	8.02	6.27	5.19	4.12
49	13.98	11.96	9.94	8.16	6.38	5.29	4.20
50	14.22	12.17	10.12	8.31	6.50	5.39	4.27
51	14.47	12.38	10.30	8.45	6.61	5.48	4.35
52	14.71	12.59	10.47	8.60	6.73	5.58	4.43
53	14.95	12.80	10.65	8.75	6.85	5.67	4.50
54	15.20	13.01	10.83	8.89	6.96	5.77	4.58
55	15.44	13.22	11.00	9.04	7.08	5.87	4.66
56	15.68	13.43	11.18	9.19	7.19	5.96	4.73
57	15.93	13.64	11.36	9.33	7.31	6.06	4.81
58	16.17	13.85	11.53	9.48	7.42	6.15	4.89
59	16.41	14.06	11.71	9.62	7.54	6.25	4.96
60	16.65	14.27	11.89	9.77	7.66	6.35	5.04
61	16.90	14.48	12.06	9.92	7.77	6.44	5.11
62	17.14	14.69	12.24	10.06	7.89	6.54	5.19
63	17.38	14.90	12.42	10.21	8.00	6.64	5.27
64	17.63	15.11	12.59	10.36	8.12	6.73	5.34
65	17.87	15.32	12.77	10.50	8.23	6.83	5.42
66	18.11	15.53	12.95	10.65	8.35	6.92	5.50
67	18.36	15.74	13.12	10.79	8.47	7.02	5.57

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
68	18.60	15.95	13.30	10.94	8.58	7.12	5.65
69	18.84	16.16	13.48	11.09	8.70	7.21	5.73
70	19.08	16.37	13.65	11.23	8.81	7.31	5.80
71	19.33	16.58	13.83	11.38	8.93	7.40	5.88
72	19.57	16.79	14.01	11.53	9.04	7.50	5.96
73	19.81	17.00	14.19	11.67	9.16	7.60	6.03
74	20.06	17.21	14.36	11.82	9.28	7.69	6.11
75	20.30	17.42	14.54	11.96	9.39	7.79	6.18
76	20.54	17.63	14.72	12.11	9.51	7.88	6.26
77	20.79	17.84	14.89	12.26	9.62	7.98	6.34
78	21.03	18.05	15.07	12.40	9.74	8.08	6.41
79	21.27	18.26	15.25	12.55	9.85	8.17	6.49
80	21.51	18.47	15.42	12.70	9.97	8.27	6.57
81	21.76	18.68	15.60	12.84	10.09	8.36	6.64
82	22.00	18.89	15.78	12.99	10.20	8.46	6.72
83	22.24	19.10	15.95	13.13	10.32	8.56	6.80
84	22.49	19.31	16.13	13.28	10.43	8.65	6.87
85	22.73	19.52	16.31	13.43	10.55	8.75	6.95
86	22.97	19.73	16.48	13.57	10.66	8.84	7.02
87	23.22	19.94	16.66	13.72	10.78	8.94	7.10
88	23.46	20.15	16.84	13.87	10.90	9.04	7.18
89	23.70	20.36	17.01	14.01	11.01	9.13	7.25
90	23.94	20.57	17.19	14.16	11.13	9.23	7.33
91	24.19	20.78	17.37	14.30	11.24	9.32	7.41
92	24.43	20.99	17.54	14.45	11.36	9.42	7.48
93	24.67	21.20	17.72	14.60	11.47	9.52	7.56
94	24.92	21.41	17.90	14.74	11.59	9.61	7.64
95	25.16	21.62	18.07	14.89	11.71	9.71	7.71
96	25.40	21.83	18.25	15.04	11.82	9.80	7.79
97	25.65	22.04	18.43	15.18	11.94	9.90	7.87
98	25.89	22.25	18.61	15.33	12.05	10.00	7.94
99	26.13	22.46	18.78	15.47	12.17	10.09	8.02
100	26.37	22.67	18.96	15.62	12.28	10.19	8.09
101	26.62	22.88	19.14	15.77	12.40	10.28	8.17

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
102	26.86	23.09	19.31	15.91	12.51	10.38	8.25
103	27.10	23.30	19.49	16.06	12.63	10.48	8.32
104	27.35	23.51	19.67	16.21	12.75	10.57	8.40
105	27.59	23.72	19.84	16.35	12.86	10.67	8.48
106	27.83	23.93	20.02	16.50	12.98	10.77	8.55
107	28.08	24.14	20.20	16.64	13.09	10.86	8.63
108	28.32	24.35	20.37	16.79	13.21	10.96	8.71
109	28.56	24.56	20.55	16.94	13.32	11.05	8.78
110	28.80	24.77	20.73	17.08	13.44	11.15	8.86
111	29.05	24.98	20.90	17.23	13.56	11.25	8.93
112	29.29	25.19	21.08	17.38	13.67	11.34	9.01
113	29.53	25.40	21.26	17.52	13.79	11.44	9.09
114	29.78	25.61	21.43	17.67	13.90	11.53	9.16
115	30.02	25.82	21.61	17.81	14.02	11.63	9.24
116	30.26	26.03	21.79	17.96	14.13	11.73	9.32
117	30.51	26.24	21.96	18.11	14.25	11.82	9.39
118	30.75	26.45	22.14	18.25	14.37	11.92	9.47
119	30.99	26.65	22.32	18.40	14.48	12.01	9.55
120	31.23	26.86	22.49	18.55	14.60	12.11	9.62
121	31.48	27.07	22.67	18.69	14.71	12.21	9.70
122	31.72	27.28	22.85	18.84	14.83	12.30	9.78
123	31.96	27.49	23.03	18.98	14.94	12.40	9.85
124	32.21	27.70	23.20	19.13	15.06	12.49	9.93
125	32.45	27.91	23.38	19.28	15.18	12.59	10.00
126	32.69	28.12	23.56	19.42	15.29	12.69	10.08
127	32.94	28.33	23.73	19.57	15.41	12.78	10.16
128	33.18	28.54	23.91	19.72	15.52	12.88	10.23
129	33.42	28.75	24.09	19.86	15.64	12.97	10.31
130	33.66	28.96	24.26	20.01	15.75	13.07	10.39
131	33.91	29.17	24.44	20.15	15.87	13.17	10.46
132	34.15	29.38	24.62	20.30	15.99	13.26	10.54
133	34.39	29.59	24.79	20.45	16.10	13.36	10.62
134	34.64	29.80	24.97	20.59	16.22	13.45	10.69
135	34.88	30.01	25.15	20.74	16.33	13.55	10.77

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
136	35.12	30.22	25.32	20.89	16.45	13.65	10.84
137	35.37	30.43	25.50	21.03	16.56	13.74	10.92
138	35.61	30.64	25.68	21.18	16.68	13.84	11.00
139	35.85	30.85	25.85	21.32	16.80	13.93	11.07
140	36.09	31.06	26.03	21.47	16.91	14.03	11.15
141	36.34	31.27	26.21	21.62	17.03	14.13	11.23
142	36.58	31.48	26.38	21.76	17.14	14.22	11.30
143	36.82	31.69	26.56	21.91	17.26	14.32	11.38
144	37.07	31.90	26.74	22.06	17.37	14.42	11.46
145	37.31	32.11	26.91	22.20	17.49	14.51	11.53
146	37.55	32.32	27.09	22.35	17.61	14.61	11.61
147	37.80	32.53	27.27	22.49	17.72	14.70	11.69
148	38.04	32.74	27.45	22.64	17.84	14.80	11.76
149	38.28	32.95	27.62	22.79	17.95	14.90	11.84
150	38.52	33.16	27.80	22.93	18.07	14.99	11.91
151	38.77	33.37	27.98	23.08	18.18	15.09	11.99
152	39.01	33.58	28.15	23.23	18.30	15.18	12.07
153	39.25	33.79	28.33	23.37	18.42	15.28	12.14
154	39.50	34.00	28.51	23.52	18.53	15.38	12.22
155	39.74	34.21	28.68	23.66	18.65	15.47	12.30
156	39.98	34.42	28.86	23.81	18.76	15.57	12.37
157	40.23	34.63	29.04	23.96	18.88	15.66	12.45
158	40.47	34.84	29.21	24.10	18.99	15.76	12.53
159	40.71	35.05	29.39	24.25	19.11	15.86	12.60
160	40.95	35.26	29.57	24.40	19.23	15.95	12.68
161	41.20	35.47	29.74	24.54	19.34	16.05	12.75
162	41.44	35.68	29.92	24.69	19.46	16.14	12.83
163	41.68	35.89	30.10	24.83	19.57	16.24	12.91
164	41.93	36.10	30.27	24.98	19.69	16.34	12.98
165	42.17	36.31	30.45	25.13	19.80	16.43	13.06
166	42.41	36.52	30.63	25.27	19.92	16.53	13.14
167	42.66	36.73	30.80	25.42	20.04	16.62	13.21
168	42.90	36.94	30.98	25.57	20.15	16.72	13.29
169	43.14	37.15	31.16	25.71	20.27	16.82	13.37

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
170	43.38	37.36	31.33	25.86	20.38	16.91	13.44
171	43.63	37.57	31.51	26.00	20.50	17.01	13.52
172	43.87	37.78	31.69	26.15	20.61	17.10	13.60
173	44.11	37.99	31.87	26.30	20.73	17.20	13.67
174	44.36	38.20	32.04	26.44	20.85	17.30	13.75
175	44.60	38.41	32.22	26.59	20.96	17.39	13.82
176	44.84	38.62	32.40	26.74	21.08	17.49	13.90
177	45.09	38.83	32.57	26.88	21.19	17.58	13.98
178	45.33	39.04	32.75	27.03	21.31	17.68	14.05
179	45.57	39.25	32.93	27.17	21.42	17.78	14.13
180	45.81	39.46	33.10	27.32	21.54	17.87	14.21
181	46.06	39.67	33.28	27.47	21.66	17.97	14.28
182	46.30	39.88	33.46	27.61	21.77	18.07	14.36
183	46.54	40.09	33.63	27.76	21.89	18.16	14.44
184	46.79	40.30	33.81	27.91	22.00	18.26	14.51
185	47.03	40.51	33.99	28.05	22.12	18.35	14.59
186	47.27	40.72	34.16	28.20	22.23	18.45	14.66
187	47.52	40.93	34.34	28.34	22.35	18.55	14.74
188	47.76	41.14	34.52	28.49	22.47	18.64	14.82
189	48.00	41.35	34.69	28.64	22.58	18.74	14.89
190	48.24	41.56	34.87	28.78	22.70	18.83	14.97
191	48.49	41.77	35.05	28.93	22.81	18.93	15.05
192	48.73	41.98	35.22	29.08	22.93	19.03	15.12
193	48.97	42.19	35.40	29.22	23.04	19.12	15.20
194	49.22	42.40	35.58	29.37	23.16	19.22	15.28
195	49.46	42.61	35.75	29.51	23.28	19.31	15.35
196	49.70	42.82	35.93	29.66	23.39	19.41	15.43
197	49.95	43.03	36.11	29.81	23.51	19.51	15.51
198	50.19	43.24	36.29	29.95	23.62	19.60	15.58
199	50.43	43.45	36.46	30.10	23.74	19.70	15.66
200	50.67	43.66	36.64	30.25	23.85	19.79	15.73

Table A-2. Point Source Dispersion Table for Determining Value of Sigma-Z (meters)

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
1	0.04	0.35	0.65	0.60	0.55	0.53	0.50
2	0.19	0.47	0.75	0.68	0.62	0.58	0.54
3	0.33	0.59	0.85	0.77	0.69	0.64	0.58
4	0.48	0.71	0.95	0.85	0.76	0.69	0.62
5	0.62	0.83	1.04	0.94	0.83	0.75	0.66
6	0.77	0.96	1.14	1.02	0.89	0.80	0.70
7	0.91	1.08	1.24	1.10	0.96	0.85	0.75
8	1.06	1.20	1.34	1.19	1.03	0.91	0.79
9	1.20	1.32	1.44	1.27	1.10	0.96	0.83
10	1.34	1.44	1.54	1.35	1.17	1.02	0.87
11	1.49	1.56	1.64	1.44	1.24	1.07	0.91
12	1.63	1.69	1.74	1.52	1.31	1.13	0.95
13	1.78	1.81	1.84	1.61	1.37	1.18	0.99
14	1.92	1.93	1.94	1.69	1.44	1.24	1.03
15	2.07	2.05	2.04	1.77	1.51	1.29	1.07
16	2.21	2.17	2.14	1.86	1.58	1.35	1.11
17	2.35	2.30	2.24	1.94	1.65	1.40	1.15
18	2.50	2.42	2.34	2.03	1.72	1.46	1.20
19	2.64	2.54	2.43	2.11	1.78	1.51	1.24
20	2.79	2.66	2.53	2.19	1.85	1.56	1.28
21	2.93	2.78	2.63	2.28	1.92	1.62	1.32
22	3.08	2.90	2.73	2.36	1.99	1.67	1.36
23	3.22	3.03	2.83	2.44	2.06	1.73	1.40
24	3.37	3.15	2.93	2.53	2.13	1.78	1.44
25	3.51	3.27	3.03	2.61	2.19	1.84	1.48
26	3.65	3.39	3.13	2.70	2.26	1.89	1.52
27	3.80	3.51	3.23	2.78	2.33	1.95	1.56
28	3.94	3.64	3.33	2.86	2.40	2.00	1.60
29	4.09	3.76	3.43	2.95	2.47	2.06	1.65
30	4.23	3.88	3.53	3.03	2.54	2.11	1.69
31	4.38	4.00	3.63	3.12	2.60	2.17	1.73
32	4.52	4.12	3.73	3.20	2.67	2.22	1.77
33	4.67	4.24	3.82	3.28	2.74	2.28	1.81

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
34	4.81	4.37	3.92	3.37	2.81	2.33	1.85
35	4.95	4.49	4.02	3.45	2.88	2.38	1.89
36	5.10	4.61	4.12	3.53	2.95	2.44	1.93
37	5.24	4.73	4.22	3.62	3.02	2.49	1.97
38	5.39	4.85	4.32	3.70	3.08	2.55	2.01
39	5.53	4.98	4.42	3.79	3.15	2.60	2.05
40	5.68	5.10	4.52	3.87	3.22	2.66	2.10
41	5.82	5.22	4.62	3.95	3.29	2.71	2.14
42	5.96	5.34	4.72	4.04	3.36	2.77	2.18
43	6.11	5.46	4.82	4.12	3.43	2.82	2.22
44	6.25	5.59	4.92	4.21	3.49	2.88	2.26
45	6.40	5.71	5.02	4.29	3.56	2.93	2.30
46	6.54	5.83	5.12	4.37	3.63	2.99	2.34
47	6.69	5.95	5.22	4.46	3.70	3.04	2.38
48	6.83	6.07	5.31	4.54	3.77	3.10	2.42
49	6.98	6.19	5.41	4.62	3.84	3.15	2.46
50	7.12	6.32	5.51	4.71	3.90	3.20	2.50
51	7.26	6.44	5.61	4.79	3.97	3.26	2.55
52	7.41	6.56	5.71	4.88	4.04	3.31	2.59
53	7.55	6.68	5.81	4.96	4.11	3.37	2.63
54	7.70	6.80	5.91	5.04	4.18	3.42	2.67
55	7.84	6.93	6.01	5.13	4.25	3.48	2.71
56	7.99	7.05	6.11	5.21	4.31	3.53	2.75
57	8.13	7.17	6.21	5.30	4.38	3.59	2.79
58	8.28	7.29	6.31	5.38	4.45	3.64	2.83
59	8.42	7.41	6.41	5.46	4.52	3.70	2.87
60	8.56	7.53	6.51	5.55	4.59	3.75	2.91
61	8.71	7.66	6.61	5.63	4.66	3.81	2.95
62	8.85	7.78	6.70	5.71	4.73	3.86	3.00
63	9.00	7.90	6.80	5.80	4.79	3.91	3.04
64	9.14	8.02	6.90	5.88	4.86	3.97	3.08
65	9.29	8.14	7.00	5.97	4.93	4.02	3.12
66	9.43	8.27	7.10	6.05	5.00	4.08	3.16
67	9.57	8.39	7.20	6.13	5.07	4.13	3.20

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
68	9.72	8.51	7.30	6.22	5.14	4.19	3.24
69	9.86	8.63	7.40	6.30	5.20	4.24	3.28
70	10.01	8.75	7.50	6.39	5.27	4.30	3.32
71	10.15	8.88	7.60	6.47	5.34	4.35	3.36
72	10.30	9.00	7.70	6.55	5.41	4.41	3.40
73	10.44	9.12	7.80	6.64	5.48	4.46	3.45
74	10.59	9.24	7.90	6.72	5.55	4.52	3.49
75	10.73	9.36	8.00	6.80	5.61	4.57	3.53
76	10.87	9.48	8.09	6.89	5.68	4.63	3.57
77	11.02	9.61	8.19	6.97	5.75	4.68	3.61
78	11.16	9.73	8.29	7.06	5.82	4.73	3.65
79	11.31	9.85	8.39	7.14	5.89	4.79	3.69
80	11.45	9.97	8.49	7.22	5.96	4.84	3.73
81	11.60	10.09	8.59	7.31	6.02	4.90	3.77
82	11.74	10.22	8.69	7.39	6.09	4.95	3.81
83	11.89	10.34	8.79	7.48	6.16	5.01	3.85
84	12.03	10.46	8.89	7.56	6.23	5.06	3.89
85	12.17	10.58	8.99	7.64	6.30	5.12	3.94
86	12.32	10.70	9.09	7.73	6.37	5.17	3.98
87	12.46	10.82	9.19	7.81	6.44	5.23	4.02
88	12.61	10.95	9.29	7.89	6.50	5.28	4.06
89	12.75	11.07	9.39	7.98	6.57	5.34	4.10
90	12.90	11.19	9.48	8.06	6.64	5.39	4.14
91	13.04	11.31	9.58	8.15	6.71	5.45	4.18
92	13.18	11.43	9.68	8.23	6.78	5.50	4.22
93	13.33	11.56	9.78	8.31	6.85	5.55	4.26
94	13.47	11.68	9.88	8.40	6.91	5.61	4.30
95	13.62	11.80	9.98	8.48	6.98	5.66	4.34
96	13.76	11.92	10.08	8.57	7.05	5.72	4.39
97	13.91	12.04	10.18	8.65	7.12	5.77	4.43
98	14.05	12.17	10.28	8.73	7.19	5.83	4.47
99	14.20	12.29	10.38	8.82	7.26	5.88	4.51
100	14.34	12.41	10.48	8.90	7.32	5.94	4.55
101	14.48	12.53	10.58	8.99	7.39	5.99	4.59

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
102	14.63	12.65	10.68	9.07	7.46	6.05	4.63
103	14.77	12.77	10.78	9.15	7.53	6.10	4.67
104	14.92	12.90	10.88	9.24	7.60	6.16	4.71
105	15.06	13.02	10.97	9.32	7.67	6.21	4.75
106	15.21	13.14	11.07	9.40	7.73	6.26	4.79
107	15.35	13.26	11.17	9.49	7.80	6.32	4.84
108	15.50	13.38	11.27	9.57	7.87	6.37	4.88
109	15.64	13.51	11.37	9.66	7.94	6.43	4.92
110	15.78	13.63	11.47	9.74	8.01	6.48	4.96
111	15.93	13.75	11.57	9.82	8.08	6.54	5.00
112	16.07	13.87	11.67	9.91	8.15	6.59	5.04
113	16.22	13.99	11.77	9.99	8.21	6.65	5.08
114	16.36	14.11	11.87	10.08	8.28	6.70	5.12
115	16.51	14.24	11.97	10.16	8.35	6.76	5.16
116	16.65	14.36	12.07	10.24	8.42	6.81	5.20
117	16.79	14.48	12.17	10.33	8.49	6.87	5.24
118	16.94	14.60	12.27	10.41	8.56	6.92	5.29
119	17.08	14.72	12.36	10.49	8.62	6.98	5.33
120	17.23	14.85	12.46	10.58	8.69	7.03	5.37
121	17.37	14.97	12.56	10.66	8.76	7.08	5.41
122	17.52	15.09	12.66	10.75	8.83	7.14	5.45
123	17.66	15.21	12.76	10.83	8.90	7.19	5.49
124	17.81	15.33	12.86	10.91	8.97	7.25	5.53
125	17.95	15.46	12.96	11.00	9.03	7.30	5.57
126	18.09	15.58	13.06	11.08	9.10	7.36	5.61
127	18.24	15.70	13.16	11.17	9.17	7.41	5.65
128	18.38	15.82	13.26	11.25	9.24	7.47	5.69
129	18.53	15.94	13.36	11.33	9.31	7.52	5.74
130	18.67	16.06	13.46	11.42	9.38	7.58	5.78
131	18.82	16.19	13.56	11.50	9.44	7.63	5.82
132	18.96	16.31	13.66	11.58	9.51	7.69	5.86
133	19.11	16.43	13.75	11.67	9.58	7.74	5.90
134	19.25	16.55	13.85	11.75	9.65	7.79	5.94
135	19.39	16.67	13.95	11.84	9.72	7.85	5.98

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
136	19.54	16.80	14.05	11.92	9.79	7.90	6.02
137	19.68	16.92	14.15	12.00	9.86	7.96	6.06
138	19.83	17.04	14.25	12.09	9.92	8.01	6.10
139	19.97	17.16	14.35	12.17	9.99	8.07	6.14
140	20.12	17.28	14.45	12.26	10.06	8.12	6.19
141	20.26	17.40	14.55	12.34	10.13	8.18	6.23
142	20.40	17.53	14.65	12.42	10.20	8.23	6.27
143	20.55	17.65	14.75	12.51	10.27	8.29	6.31
144	20.69	17.77	14.85	12.59	10.33	8.34	6.35
145	20.84	17.89	14.95	12.67	10.40	8.40	6.39
146	20.98	18.01	15.05	12.76	10.47	8.45	6.43
147	21.13	18.14	15.15	12.84	10.54	8.51	6.47
148	21.27	18.26	15.24	12.93	10.61	8.56	6.51
149	21.42	18.38	15.34	13.01	10.68	8.61	6.55
150	21.56	18.50	15.44	13.09	10.74	8.67	6.59
151	21.70	18.62	15.54	13.18	10.81	8.72	6.64
152	21.85	18.75	15.64	13.26	10.88	8.78	6.68
153	21.99	18.87	15.74	13.35	10.95	8.83	6.72
154	22.14	18.99	15.84	13.43	11.02	8.89	6.76
155	22.28	19.11	15.94	13.51	11.09	8.94	6.80
156	22.43	19.23	16.04	13.60	11.15	9.00	6.84
157	22.57	19.35	16.14	13.68	11.22	9.05	6.88
158	22.72	19.48	16.24	13.76	11.29	9.11	6.92
159	22.86	19.60	16.34	13.85	11.36	9.16	6.96
160	23.00	19.72	16.44	13.93	11.43	9.22	7.00
161	23.15	19.84	16.54	14.02	11.50	9.27	7.04
162	23.29	19.96	16.63	14.10	11.57	9.33	7.09
163	23.44	20.09	16.73	14.18	11.63	9.38	7.13
164	23.58	20.21	16.83	14.27	11.70	9.43	7.17
165	23.73	20.33	16.93	14.35	11.77	9.49	7.21
166	23.87	20.45	17.03	14.44	11.84	9.54	7.25
167	24.01	20.57	17.13	14.52	11.91	9.60	7.29
168	24.16	20.69	17.23	14.60	11.98	9.65	7.33
169	24.30	20.82	17.33	14.69	12.04	9.71	7.37

Distance from Source (meters)	Stability Class 1	Stability Class 2	Stability Class 3	Stability Class 4	Stability Class 5	Stability Class 6	Stability Class 7
170	24.45	20.94	17.43	14.77	12.11	9.76	7.41
171	24.59	21.06	17.53	14.85	12.18	9.82	7.45
172	24.74	21.18	17.63	14.94	12.25	9.87	7.49
173	24.88	21.30	17.73	15.02	12.32	9.93	7.54
174	25.03	21.43	17.83	15.11	12.39	9.98	7.58
175	25.17	21.55	17.93	15.19	12.45	10.04	7.62
176	25.31	21.67	18.02	15.27	12.52	10.09	7.66
177	25.46	21.79	18.12	15.36	12.59	10.14	7.70
178	25.60	21.91	18.22	15.44	12.66	10.20	7.74
179	25.75	22.04	18.32	15.53	12.73	10.25	7.78
180	25.89	22.16	18.42	15.61	12.80	10.31	7.82
181	26.04	22.28	18.52	15.69	12.86	10.36	7.86
182	26.18	22.40	18.62	15.78	12.93	10.42	7.90
183	26.33	22.52	18.72	15.86	13.00	10.47	7.94
184	26.47	22.64	18.82	15.94	13.07	10.53	7.98
185	26.61	22.77	18.92	16.03	13.14	10.58	8.03
186	26.76	22.89	19.02	16.11	13.21	10.64	8.07
187	26.90	23.01	19.12	16.20	13.28	10.69	8.11
188	27.05	23.13	19.22	16.28	13.34	10.75	8.15
189	27.19	23.25	19.32	16.36	13.41	10.80	8.19
190	27.34	23.38	19.41	16.45	13.48	10.86	8.23
191	27.48	23.50	19.51	16.53	13.55	10.91	8.27
192	27.62	23.62	19.61	16.62	13.62	10.96	8.31
193	27.77	23.74	19.71	16.70	13.69	11.02	8.35
194	27.91	23.86	19.81	16.78	13.75	11.07	8.39
195	28.06	23.98	19.91	16.87	13.82	11.13	8.43
196	28.20	24.11	20.01	16.95	13.89	11.18	8.48
197	28.35	24.23	20.11	17.03	13.96	11.24	8.52
198	28.49	24.35	20.21	17.12	14.03	11.29	8.56
199	28.64	24.47	20.31	17.20	14.10	11.35	8.60
200	28.78	24.59	20.41	17.29	14.16	11.40	8.64

Appendix B:
***PG_Analysis_Methane_CSV* Program**
Code

```
clear

% This MATLAB code is used to read CSV raw data files and analyze the data to
% yield methane emission rate estimates
load pgtabley.mat; % Load the Sigma y table
load pgtablez.mat; % Load the Sigma z table
files = dir( 'STR*.csv'); % Pointing to all the STR files in the directory
countfiles = numel(files);
param = xlsread('parameter.xls'); % Reading the Parameter file containing the
% relevant parameters to perform the calculation

run = 050113; % Analysis run MMDDYY(see notbook)
wslimit = 0.0; % Set wind speed cut limit (m/s)
%al = 60; % Set wind angle cut limit (+/- deg, 180 indicates no filter
al = param(1,1); % This is the wind cut
clp = 2.0; % Set bin density cut limit (%)
bb1 = 5; % Set start deg value for angle bin (deg)
bb2 = 10; % Set bin size (deg)
bb3 = 365; % Set end bin (see Ln 12)

dist = [];
senh = [];
sorh = [];

%%% This section reads the STR files in csv format which follows the Retigo
% format and extracts parameters relevant to the calculation

formatdatetime = 'yyyy-mm-dd HH:MM:SS'; % Specifying the format of date & time
% in the STR file

for k1 = 1:countfiles
    jadu = fopen((files(k1).name));

    ach = textscan(jadu,'%s %f %f %n %f %f %f %f %n %f %f %f %f %f %f %n %f %f
    %f %f %f %f %f %f %f %f %n %f %f %n %n %n %n %n %f %f ',...
    'Delimiter',' ','CollectOutput',1,'HeaderLines',9); % Specifying the
    format type of the given columns
    fclose(jadu)
    format short g
    newdat = (ach{1}(1:end,:));
    newdat1 = char(newdat);

    % Since the format of date and time is very different from what MATLAB
    % recognizes, this following code enables MATLAB to read the date and time
    % properly from the STR file
    for si = 1:length(newdat1)

        jaguar (si) = strfind(newdat1(si,:), 'T');

    end

    for si = 1:length(newdat1)
        jaguar1(si) = strfind(newdat1(si,:), '+');
    end

    newdat1(:,[jaguar,jaguar1:end]) = ' ';
    newdat2 = datenum(newdat1,formatdatetime);
```

```

jadul = [(newdat2) ach{2}];

% This part of the code is extracting distance values, sensor height, and
% source height from the STR file
jaduguy = fopen((files(k1).name));
dis = textscan(jaduguy, '%s %f', ...
'Delimiter', ',', 'CollectOutput', 1);
fclose(jaduguy)
jaduguy1 = (dis{2}(1:end,:));
dista = jaduguy1(1,1);
dist = [dist;dista]; % Tabulating distance values of all the measurements
senht = jaduguy1(101,1);
senh = [senh;senht]; % Tabulating sensor height values of all the measurements
if provided
sorht = jaduguy1(121,1);
sorh = [sorh;sorht]; % Tabulating source height values of all the measurements
if provided

% Taking care of when the weather measuring instrument does not log in
% data which may happen in the field
[r2 c2] = size (jadul);
for y1 = 1:r2

    nanchk = isnan (jadul((1:end),22));
    [y1 n2] = find( nanchk == 1);

    end

    jadul(y1(1:end),:) = [];

delay = param(2,1); % Delay time
samprate = param(5,1); % Sampling Rate
n1 = delay.*samprate;

time = jadul((1:end),1); % Date & Time

lat = jadul((1:end),2); % GPS latitude
long = jadul((1:end),3); % GPS longitude
ws2 = jadul((1:end),11); % 2D wind speed (m/s)
wd2 = jadul((1:end),12); % 2D wind direction (deg, auto aligned north)
temp = jadul((1:end),13); % Met station Temperature (deg C)
pres = jadul((1:end),15); % Met Station Pressure (mbar)
ws3y = jadul((1:end),18); % 3D u (m/s)
ws3x = jadul((1:end),19); % 3D v (m/s)
ws3z = jadul((1:end),20); % 3D w (m/s)
ws3 = jadul((1:end),22); % 3D sonic 3D wind speed (m/s)
wd3 = jadul((1:end),23); % 3D wind direction (deg, arbitrary)
ws3t = jadul((1:end),26); % 3D t (deg C)
co2 = jadul((1:end),29); % CO2 concentration (ppm)
ch4 = jadul((1:end),30); % Ch4 concentration (ppm)

co2(1:n1) = []; % Accomodating all other variables for the delay time
ch4(1:n1) = [];

```

```
c1 = length(co2);  
time(c1+1:end) = [];  
ws3(c1+1:end) = [];  
wd3(c1+1:end) = [];  
ws2(c1+1:end) = [];  
wd2(c1+1:end) = [];  
temp(c1+1:end) = [];  
pres(c1+1:end) = [];  
ws3z(c1+1:end) = [];  
ws3y(c1+1:end) = [];  
ws3x(c1+1:end) = [];  
ws3t(c1+1:end) = [];  
lat(c1+1:end) = [];  
long(c1+1:end) = [];
```

```
calib = param(3,1);  
ch4=ch4./calib; % calibration correction
```

```
% Rotate 3D sonic coordinate system to streamlined set (-180 deg)  
% Field data should be near -180 deg by manual sonic rotation set  
% If mean direction is in N hemisphere, rotation sets to 0 deg (warning)  
% Output <x>, <z>, = 0 or check file
```

```
mws3x = mean(ws3x);  
mws3y = mean(ws3y);  
mws3z = mean(ws3z);
```

```
mndir = 180 + (atan2(-1*(mws3y),-1*(mws3x))*57.29578);
```

```
RA = atan(mws3y/mws3x); % First rotation (set <x> = 0)
```

```
CRA = cos(RA);  
SRA = sin(RA);
```

```
nws3x = ws3x*CRA + ws3y*SRA;  
nws3y = (-1)*ws3x*SRA + ws3y*CRA;
```

```
mnws3x = mean(nws3x);  
mnws3y = mean(nws3y);  
mndir = 180 + (atan2(-1*(mnws3y),-1*(mnws3x))*57.29578);
```

```
RB = atan(mws3z/mnws3x); %Second rotation (set <z> = 0)
```

```
CRB = cos(RB);  
SRB = sin(RB);
```

```
nnws3x = nws3x*CRB + ws3z*SRB;  
nws3z = (-1)*nws3x*SRB + ws3z*CRB;
```

```
mnws3x = mean(nnws3x);  
mnws3z = mean(nws3z);  
mnmndir = 180 + (atan2(-1*(mnws3z),-1*(mnws3x))*57.29578);
```

```
% assigned streamlined coordates
```

```
ws3x = nnws3x;  
ws3y = nws3y;
```

```

ws3z = nws3z;
% calculate and assign new 3D sonic 2D wind direction
ndir = 180 + (atan2(-1*(ws3y),-1*(ws3x))*57.29578);
wd3 = ndir;
% calculate and assign new 3D sonic 2D wind speed
sp = (ws3x.*ws3x + ws3y.*ws3y);
spl = sp.^0.5;
ws3 =spl;

jadu2 = [time lat long co2 ch4 ws2 wd2 temp pres ws3 wd3 ws3y ws3x ws3z ws3t];
% write the key arrays onto a new file

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% Wind speed filter
[r c] = size(jadu2);
a2 = find(ws3<wslimit);
jadu2(a2,:) = [];
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%% Wind angle filter
wd3j = jadu2((1:end),11); % 3D sonic wind direction
cl=clp/100;
cutM = cl* length(wd3j); % Standard is 1% cut

degM = 1:10:361;
i2 = 1:length(degM);
i1 = 1:length(wd3j);
resM(i2) = 0;
countM(i2) = 0;
for i2 = 1:length(degM)
    for i1 = 1:length(wd3j)
        if wd3j(i1) >= degM(i2) && wd3j(i1) < degM(i2+1)
            countM(i2)= countM(i2) +1 ;
            resM(i2)= resM(i2)+ ch4(i1) ;
        end
    end
end

for i2 = 1:length(degM)
    if countM(i2) >= cutM
        resMN(i2) = resM(i2)./countM(i2);
    elseif countM(i2) < cutM
        resMN(i2) = min(resM);
    end
end
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% resNM = resM./countM;
% [C,binx] = max(resNM);
[C,binx] = max(resMN);

binxx = 10*binx - 5;

degl = binxx - a1;
degh = binxx + a1;
[r c] = size(jadu2);
a3 = find(wd3j<degl);
a4 = find(wd3j>degh);
a5 = cat (1,a3,a4);
a6 = sort (a5);
jadu2(a6,:) = [];

```

```
    csvwrite(['Processed',files(k1).name], jadu2); % Save Time Aligned files  
as Processed.csv in the same directory  
end
```

```
files2 = dir('Processed*.csv');
```

```
% Variables which keep recording new values as the code goes through each  
% files
```

```
countfiles2 = numel(files2);  
impnum = [];  
emflux2 = [];  
disney0 = [];  
coeffi = [];  
coeffil = [];  
rsq = [];  
cut0 = [];  
numabcknd = [];  
pnum = [];  
rt2rp2 = [];  
methanemean = [];  
binga = [];  
cangl1 = [];  
countqa = [];  
tempqa = [];  
stdws3tqa = [];  
minws3tqa = [];  
maxws3tqa = [];  
albkgl = [];
```

```
aaa = dist./dist;  
wsl = wslimit*aaa;  
all = al*aaa;  
clp1 = clp*aaa;  
bin = bb2*aaa;
```

```
rtlrp1 = 298/1013.25;  
gasconst = 8.314510;  
mw = param(4,1); % Molecular weight  
grtlrp1 = rtlrp1*gasconst;  
rt0rp0 = (gasconst*298)/101.325;  
opt = (1e-06 * mw*1000)/rt0rp0; % Converting the concentration to grams per  
meter cube
```

```
for k2 = 1:countfiles2
```

```
al = csvread(files2(k2).name);  
ws = al(:,10); % 3D soinic 3D wind speed (m/s)  
ws2 = al(:,6); % Met. Station 2D wind wpeed (m/s)  
temp = al(:,8)+273.15; % Met. Station temp (deg K)  
pres = al(:,9); % Met. Station atmospheric pressure (mbar)  
ala = al(:,11); % 3D wind direction  
alb = al(:,5); % Methane concentration  
alc = al(:,4); % CO2 concentration  
ws3z = al(:,14); % 3D w  
ws3y = al(:,12); % 3D u  
ws3x = al(:,13); % 3D v  
ws3t = al(:,15); % 3D t
```



```

maxmet = max(alb);           % Maximum methane concentration
minmet = min(alb);         % Minimum methane concentration
mmet = mean(alb);          % Mean methane concentration
mws = mean(ws);            % Mean 3D sonic wind speed (m/s)
mws2 = mean(ws2);          % Mean met. Station 2D wind speed (m/s)
mtemp = mean(temp);        % Mean met station temp. (K)
mpres = mean(pres);        % Mean met. station atmospheric pressure (mbar)
m3Dt = mean(ws3t)+273.15;  % Mean 3D sonic temp. (K)
mco2 = mean(alc);          % Mean CO2 concentration (ppm)
stdco2 = std(alc);         % Std dev in CO2 (ppm)
stdws3t = std(ws3t);       % Std dev in 3D sonic t (C)
minws3t = min(ws3t);       % Minimum in 3D sonic t (C)
maxws3t = max(ws3t);       % Maximum in 3D sonic t (C)
lat = a1(:,2);             % Latitude
long = a1(:,3);            % Longitude
lat1 = mean(lat(:,1));     % Mean Latitude
long1 = mean(long(:,1));   % Mean Longitude
latstd = std(lat);         % Standard Deviation of the Latitude
longstd = std(long);       % Standeard Deviation of the Longitude

% This section specifies how to name the figure files containing the
% Gaussian fit with the relevant parameters
disney = files2(k2).name;
disney1 = isletter(disney);
disney2 = find(disney1 == 0);
disney3 = disney(disney2);
disney4 = str2num(disney3(2:8));
disney5 = str2num(disney3(10:end));
disney0 = [disney0; disney4 disney5];

% Taking the average of the lowest methane concentration values
og = length(alb);
oga = og*0.05;
lowval = sort(alb);
lowmet = mean(lowval(1:oga)); %lowest 5% values
%lowmet = mean(lowval(1:100)); %lowest 100 values
methanemean = [methanemean;lowmet];
mmmnet = mmet - lowmet;
lowmetstd = std(lowval(1:oga));
hival = sort(alb,'descend');
himet = mean(hival(1:oga));
himetstd = std(hival(1:oga));

if lowmetstd >= 0.005;
    lflag = 1;
else
    lflag = 0;
end
if maxmet >= 2.5*himet;
    hflag = 1;
else
    hflag = 0;
end

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%calculating raw mean products for use in Windtrax
my = mean(ws3y);
mx = mean(ws3x);
mz = mean(ws3z);
mt = mean(ws3t);
y2 = ws3y.*ws3y;

```

```

my2 = mean(y2);
x2 = ws3x.*ws3x;
mx2 = mean(x2);
z2 = ws3z.*ws3z;
mz2 = mean(z2);
t2 = ws3t.*ws3t;
mt2 = mean(t2);
yx = ws3y.*ws3x;
myx = mean(yx);
yz = ws3y.*ws3z;
myz = mean(yz);
yt = ws3y.*ws3t;
myt = mean(yt);
xz = ws3x.*ws3z;
mxz = mean(xz);
xt = ws3x.*ws3t;
mxt = mean(xt);
zt = ws3z.*ws3t;
mzt = mean(zt);

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%calculating wind parameters

%turbulent intensity
sws3z = std(ws3z);
turbuint = sws3z/mws;

% Average and the standard deviation of wind 3D sonic azimuth wind direction

wd3mean = 180 + (atan2(-1*(my),-1*(mx))*57.29578);
stddev3 = std(ala);

% Average and the standard deviation of wind direction for 2D met station
wd2rad = a1(:,7) * pi/180;
wd2y = sin(wd2rad);
wd2x = cos(wd2rad);
wd2num = numel(wd2rad);
wd2xmean = mean(wd2x);
wd2ymean = mean(wd2y);

if wd2xmean > 0 && wd2ymean > 0
wd2mean = atan(wd2ymean/wd2xmean);
wd2mean = wd2mean * (180/pi);

ep1 = wd2xmean.^2 + wd2ymean.^2;
ep1 = sqrt(1-ep1);
stddev1 = asin(ep1);
stddev2 = 1+(1.1547 -1)*ep1.^3;
stddev = stddev1 * stddev2;
stddev = stddev * (180/pi);

elseif wd2xmean > 0 && wd2ymean < 0
wd2mean = atan(wd2ymean/wd2xmean);
wd2mean = wd2mean * (180/pi);
wd2mean = wd2mean + 360;

ep1 = wd2xmean.^2 + wd2ymean.^2;
ep1 = sqrt(1-ep1);
stddev1 = asin(ep1);
stddev2 = 1+(1.1547 -1)*ep1.^3;

```

```
stddev = stddev1 * stddev2;
stddev = stddev * (180/pi);

elseif wd2xmean < 0
    wd2mean = atan(wd2ymean/wd2xmean);
wd2mean = wd2mean * (180/pi);
wd2mean = wd2mean + 180;

ep1 = wd2xmean.^2 + wd2ymean.^2;
ep1 = sqrt(1-ep1);
stddev1 = asin(ep1);
stddev2 = 1+(1.1547 -1)*ep1.^3;
stddev = stddev1 * stddev2;
stddev = stddev * (180/pi);
```

end

%% Section estimates sigmay and sigmaz estimate based on stability class estimate

%% Wind Speed PG Indicator (3D)

```
if mws > 0 && mws < 1.700;
    pgwsi = 1;
elseif mws >= 1.700 && mws < 2.400;
    pgwsi = 2;
elseif mws >= 2.400 && mws < 3.200;
    pgwsi = 3;
elseif mws >= 3.200 && mws < 4.100;
    pgwsi = 4;
elseif mws >= 4.100 && mws < 5.100;
    pgwsi = 5;
elseif mws >= 5.100 && mws < 6.200;
    pgwsi = 6;
elseif mws >= 6.200;
    pgwsi = 7;
end
```

%% Wind Speed PG Indicator (2D)

```
if mws2 > 0 && mws2 < 1.700;
    pgws2i = 1;
elseif mws2 >= 1.700 && mws2 < 2.400;
    pgws2i = 2;
elseif mws2 >= 2.400 && mws2 < 3.200;
    pgws2i = 3;
elseif mws2 >= 3.200 && mws2 < 4.100;
    pgws2i = 4;
elseif mws2 >= 4.100 && mws2 < 5.100;
    pgws2i = 5;
elseif mws2 >= 5.100 && mws2 < 6.200;
    pgws2i = 6;
elseif mws2 >= 6.200;
    pgws2i = 7;
end
```

%% Stdev Wind Direction PG Indicator (3D)

```
if stddev3 > 27.50;
    pgstddev3i = 1.00;
elseif stddev3 <= 27.50 && stddev3 > 23.50;
    pgstddev3i = 2.00;
elseif stddev3 <= 23.50 && stddev3 > 19.50;
```

```
pgstddev3i = 3.00;
elseif stddev3 <= 19.50 && stddev3 > 15.50;
    pgstddev3i = 4.00;
elseif stddev3 <= 15.50 & stddev3 > 11.50;
    pgstddev3i = 5.00;
elseif stddev3 <= 11.50 & stddev3 > 7.50;
    pgstddev3i = 6.00;
elseif stddev3 <= 7.50
    pgstddev3i = 7.00;
end

%%% Stdev Wind Direction PG Indicator (2D)
if stddev > 27.50;
    pgstddevi = 1.00;
elseif stddev <= 27.50 && stddev > 23.50;
    pgstddevi = 2.00;
elseif stddev <= 23.50 && stddev > 19.50;
    pgstddevi = 3.00;
elseif stddev <= 19.50 && stddev > 15.50;
    pgstddevi = 4.00;
elseif stddev <= 15.50 && stddev > 11.50;
    pgstddevi = 5.00;
elseif stddev <= 11.50 && stddev > 7.50;
    pgstddevi = 6.00;
elseif stddev <= 7.50
    pgstddevi = 7.00;
end

%%% Turbulent Intensity PG Indicator (3D)
if turbuint > 0.205;
    pgturbi = 1.00;
elseif turbuint <= 0.205 && turbuint > 0.180;
    pgturbi = 2.00;
elseif turbuint <= 0.180 && turbuint > 0.155;
    pgturbi = 3.00;
elseif turbuint <= 0.155 && turbuint > 0.130;
    pgturbi = 4.00;
elseif turbuint <= 0.130 && turbuint > 0.105;
    pgturbi = 5.00;
elseif turbuint <= 0.105 && turbuint > 0.080;
    pgturbi = 6.00;
elseif turbuint <= 0.080;
    pgturbi = 7.00;
end

%%%this line calculates average pg indicator

pgi = [pgstddevi + pgturbi]/2;

%%% Selection of the Stability Class
if pgi < 1.500;
    pgt = 1.00;
elseif pgi >= 1.500 && pgi < 2.500;
    pgt = 2.00;
elseif pgi >= 2.500 && pgi < 3.500;
    pgt = 3.00;
elseif pgi >= 3.500 && pgi < 4.500;
    pgt = 4.00;
elseif pgi >= 4.500 && pgi < 5.500;
    pgt = 5.00;
```

```

elseif pgi >= 5.500 && pgi < 6.500;
    pgt = 6.00;
elseif pgi >= 6.500
    pgt = 7.00;
end

d = dist(k2);
%d = dist;
dd = round(d);
pgty = pgtabley(dd,pgt); % Specifying the plume width in the y direction
pgtz = pgtablez(dd,pgt); % Plume width in the z direction

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%end of pg indicator section
% Saving values
impnum1= [mpres my mx mz mt my2 mx2 mz2 mt2 myx myz myt mxz mxt mzt lat1
latstd long1 longstd mco2 stdco2 oga maxmet himet himetstd minmet lowmet
lowmetstd mmet mmmet mws mtemp wd2mean wd3mean stddev stddev3 turbuint pgws2i
pgwsi pgstddevi pgstddev3i pgturbi pgi pgt pgty pgtz];
impnum = [impnum; impnum1];
csvwrite(['ImpValues_',files2(k2).name], impnum1);

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
% Binning measured concetration in in given degree increments

deg = bb1:bb2:bb3; %bin configuration
i2 = 1:length(deg);
i1 = 1:length(ala);
Mini = min(ala);
Maxi = max(ala);

% Set cut filter to remove low denity bins
% cl=clp/100;
% cut = cl* length(ala); % Standard is 1% cut
cut = cutM;
    cut2 = cut/10;
    cut0 = [cut0;cut2];

% Subtracting off the background which is the avg of the lowest 5% values
for i1 = 1:length(alb)
    if alb(i1) ~= 0
        alb(i1) = alb(i1)-lowmet;
    else
        alb(i1) = alb(i1);
    end
end

% Bin concetration values
res(i2) = 0;
count(i2) = 0;
for i2 = 1:length(deg)
    for i1 = 1:length(ala)
        if ala(i1) >= deg(i2) && ala(i1) < deg(i2+1)
            count(i2)= count(i2) +1 ;
            res(i2)= res(i2)+ alb(i1) ;
        end
    end
end

% Accounts for case when the count is equal to zero or less

```

```

% the number of points given in the cut filter before taking the average
for i2 = 1:length(deg)
    if count(i2) >= cut
        resN(i2) = res(i2)./count(i2);
    elseif count(i2) < cut
        resN(i2) = min(res);
    end
end
[C,bqa] = max(resN);
cangl = 10*bqa - 5;
cqa = max(count);
tqa = mtemp/m3Dt;
binga =[binga;bqa];
cangl1 =[cangl1;cangl];
countqa =[countqa;cqa];
tempqa =[tempqa;tqa];
stdws3tqa = [stdws3tqa;stdws3t];
minws3tqa = [minws3tqa;minws3t];
maxws3tqa = [maxws3tqa;maxws3t];

% Centers data so it is located at 180 degree
degcent = 180;      % center of the binning
degmax = 360;      % maximum of the binning
degmin = 0;        % minimum of the binning
resNmax = find(resN == max(resN));
resNbtwn = find(resN >= min(resN) & resN <= max(resN));
x = (degcent - deg(resNmax));
deg = deg + x;
for i1 = 1:length(deg)
    if deg(i1) > degmax
        deg(i1) = deg(i1)-degmax;
    elseif deg(i1) < degmax && deg(i1) >= degmin
        deg(i1) = deg(i1);
    elseif deg(i1) < degmin
        deg(i1) = deg(i1) + degmax;
    end
end
end

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%%fitting routine
resNT = resN';
degT = deg';
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%temp plot of methane vs.wind direction
figure(900)
plot(deg,res,'k.','linewidth',3)
title('Composite Methane vs.Wind Direction Histogram');
ylabel('Methane Concentration (AU)');
xlabel ('Wind Direction (deg.)');
grid on
box on
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%temp plot of count vs.wind direction
figure(910)
plot(deg,count,'k.','linewidth',3)
title('Measurement Count vs. Wind Direction');
ylabel('Count (#)');
xlabel ('Wind Direction(deg.)');
grid on
box on

%figure(k2)
afig = figure('visible','off')

```

```

plot(deg,resN,'ro','linewidth',1)

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
%weighted fit setting

NN = ones(size(resN));

[C,I] = max(resN);

% NN(I)= NN(I)*1.0;
% NN(I+1)= NN(I+1)*3.0;
% NN(I+2)= NN(I+2)*5.0;
% NN(I-1)= NN(I-1)*3.0;
% NN(I-2)= NN(I-2)*5.0;
% NN(I-3)= NN(I-3)*5.0;

resNNI = 1./NN;

%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
x = degT;
y = resNT;
dy = resNNI;
dyT = dy';
gg = horzcat(resNT,dyT);
fw = ezfit(degT,gg,'gauss');
showfit(fw,'fitcolor','black','maxlengtheq',0);

grid on
box on
set(gca,'fontsize',12);
ylabel('Concentration (ppm)');
xlabel('Wind Direction (deg)');
xlim([0 360]);
legend('Data','Fit');
title('Methane Concentration vs Wind Direction');
%text(250,(max(resN)+ min(resN))/2, strcat(num2str(disney4),'_ _
_',num2str(disney5)), 'FontSize',10);
text(250,(max(resN)+
min(resN))/2, strcat(num2str(disney4),'#',num2str(disney5)), 'FontSize',10);
text(250,(max(resN)+ min(resN))/2.3, strcat('pgi_', num2str(pgt),'__pgy_',
num2str(pgty)), 'FontSize',10);
text(250,(max(resN)+ min(resN))/2.6, strcat('ti_', num2str(turbuint),'__maxc_',
num2str(maxmet)), 'FontSize',10);
text(250,(max(resN)+ min(resN))/2.9, strcat('wsf_', num2str(wslimit),'__angf_',
num2str(al)), 'FontSize',10);
text(250,(max(resN)+ min(resN))/3.2, strcat('count_', num2str(cqa),'__bin_',
num2str(bqa)), 'FontSize',10);

%Saving Figures in the current directory using the convention specified
print('-djpeg','-r300',strcat(num2str(disney4),'_',num2str(disney5)));

% Saving parameters to Summary processed files
rt3rp3 = mpres/mtemp;
%rt3rp3 = mpres/m3Dt;
rt2rp2 = [rt2rp2;rt3rp3];
coeffi = [coeffi;fw];
disp(coeffi(k2).m(1:2))
coeffil = [coeffil; coeffi(k2).m(1:2)];

```

```

rsq = [rsq; coeffi(k2).r];
h1 = coeffil(k2,1);
albkg = lowmet + h1;
albkg1 = [albkg1,albkg];

    emflux3 = mws.*2.*pi.*pgty.*pgtz;
emflux2 = [emflux2;emflux3];
end
close all

% Converting to distance-based coordinates from angle space
sigmadeg = coeffil(:,2);
sigmar = sigmadeg*(pi/180);
sigmadist = 0;
sigmadist = [];
for k3 = 1:length(dist)
    sigmadist1 = tan(sigmar(k3)/2)*2*dist(k3);
    sigmadist = [sigmadist;sigmadist1];
end

format short
mconct = coeffil(:,1); % normalized methane concentration
mconctg = [];

% Calculating the peak methane concentration in g/m^3
for k4 = 1:length(mconct)
    mconct1 = mconct(k4) *opt* rtlrpl*rt2rp2(k4);
    mconctg = [mconctg;mconct1];
end

emflux = [];
for k5 = 1:length(emflux2)
    emflux1 = emflux2(k5) .*mconctg(k5);
    emflux = [emflux;emflux1];
end
albkg2 = albkg1.';
impval = [disney0 dist senh sorh albkg2 methanemean impnum cangl1 bin wsl all
clp1 coeffil mconctg sigmadist rsq binqa countqa tempqa stdws3tqa minws3tqa
maxws3tqa emflux];

percentcut = [disney0 cut0];

% Saving the calculated parameters as the main output file in csv format

xlswrite('Summary_Processed_Methane', impval);

```


Appendix C:

Example STR Data Output File in .csv Format

Distance	71
Mast Heading	180
FLIR File	
Photo File	
Notes	
Sensor Ht	0
Source Ht	0
Delay Time	0

Time	GPS Latitude	GPS Longitude	ID (-)	GPS Track	GPS Ground Speed	GPS Time	GPS DoP
2013-06-17T15:52:08+00:00	42.31482	-110.312	9	301.63	0.043496	71526.5	1
2013-06-17T15:52:08+00:00	42.31482	-110.312	9	75.84	0.093206	71527	1
2013-06-17T15:52:09+00:00	42.31482	-110.312	9	176.62	0.118061	71527.5	1
2013-06-17T15:52:09+00:00	42.31482	-110.312	9	160.04	0.16777	71528	1
2013-06-17T15:52:10+00:00	42.31482	-110.312	9	240.64	0.074565	71528.5	1
2013-06-17T15:52:10+00:00	42.31482	-110.312	9	255.07	0.093206	71529	1
2013-06-17T15:52:11+00:00	42.31482	-110.312	9	237.19	0.111847	71529.5	1
2013-06-17T15:52:11+00:00	42.31482	-110.312	9	315.72	0.155343	71530	1
2013-06-17T15:52:12+00:00	42.31482	-110.312	9	275.33	0.043496	71530.5	1
2013-06-17T15:52:12+00:00	42.31482	-110.312	9	88.75	0.086992	71531	1

SUMMA Pressure	WS Wind Speed	WS Wind Direction	WS Temperature	WS Rel Humidity	WS Bar. Pressure	WS Compass Heading
-0.1545	4.2	155	21.3	15	759.7	74
-0.1545	4.2	155	21.3	15	759.7	74
-0.16973	4.4	153	21.3	15	759.7	75
-0.17735	4.4	153	21.3	15	759.7	75
-0.19257	4.7	150	21.3	15	759.7	75
-0.19257	4.7	150	21.3	15	759.7	75
-0.1545	4.7	150	21.3	15	759.7	75
-0.22303	5	148	21.2	15	759.7	75
-0.2078	5.2	146	21.2	15	759.7	75
-0.20019	5.2	146	21.2	15	759.7	75

3DS U	3DS V	3DS W	3DS 2D Speed	3DS 3D Speed	3DS Azimuth	3DS Elevation	3DS SoS	3DS Sonic Temp	3DS Error Code
0.47	-4.35	-0.31	4.38	4.4	173.8	-4.1	343.82	20.21	0
0.71	-4.81	0.5	4.87	4.9	171.5	6	344.04	20.56	0
0.82	-4.17	0.36	4.26	4.28	168.9	4.9	344	20.51	0
1.32	-5.61	-0.03	5.77	5.78	166.8	-0.4	343.24	19.2	0
1.02	-5.63	-0.03	5.73	5.74	169.7	-0.4	343.56	19.74	0
1.07	-5.22	-0.2	5.34	5.35	168.4	-2.2	343.24	19.22	0
1.21	-4.94	0	5.09	5.1	166.2	0.1	344.04	20.59	0
0.73	-4.99	0.13	5.05	5.06	171.6	1.5	344.14	20.74	0
0.58	-5.14	0.11	5.18	5.19	173.5	1.2	343.4	19.48	0
0.16	-5.12	0.12	5.13	5.14	178.2	1.4	343.72	20.03	0

CO₂	CH₄	H₂O	H₂S	C₂H₂	BEN	TOL	ETB	M-Xylene	O-Xylene	P-Xylene	Cell Temp	Cell Pressure
394.07	2.13155				2.06691	-56.5593	32.5754	-115.096	-846.045	-143.712	28.7818	-48.5183
393.694	2.01101				2.06691	-56.5593	32.5754	-115.096	-846.045	-143.712	28.7818	-48.5183
393.869	2.06994				9.34052	-81.1741	56.8057	-105.084	-828.639	-155.119	28.7818	-48.6556
393.569	2.16082				9.34052	-81.1741	56.8057	-105.084	-828.639	-155.119	28.7818	-48.6556
393.363	2.16187				14.8855	-107.484	30.8417	-110.068	-943.659	-155.469	28.7818	-49.2048
393.898	1.99006				14.8855	-107.484	30.8417	-110.068	-943.659	-155.469	28.7818	-49.2048
394.691	1.92135				14.8855	-107.484	30.8417	-110.068	-943.659	-155.469	28.7818	-49.2048
395.464	1.89396				15.7865	-59.1672	45.1765	-126.08	-967.059	-150.171	28.7818	-49.0675
394.324	1.90753				15.7865	-59.1672	45.1765	-126.08	-967.059	-150.171	28.7818	-49.0675
394.007	1.95888				12.6283	-20.992	63.5617	-190.095	-1039.56	-149.438	28.7818	-48.7929

Appendix D:

Example Emissions Calculation Output File

This data output file consists of 70 columns, which contain both raw data and analyzed data output parameters. All column headings are shown below with three rows of data for illustrative purposes only. An explanation of each column heading is presented at the end of this appendix.

Filename	Event	Distance (m)	Sensor Height (m)	Source Height (m)	a1 + bkgCH4 (ppm)	bkgCH4 (ppm)	Pressure (mbar)
9061113	1	41	0	0	3.216979363	1.916691736	775.8775728
9061113	2	41	0	0	2.924262341	1.956654918	775.7017908
9061113	3	41	0	0	2.041596769	1.880253061	775.5687247

<u>	<v>	<w>	<t>	<u2>	<v2>	<w2>	<t2>	<uv>	<uw>	<ut>	<vw>	<vt>	<wt>
0.004433997	-2.651242025	0.000544673	16.26443624	0.328409627	7.469092121	0.100007865	264.9929505	-0.012550073	-0.021820057	0.017940362	0.033188212	-43.04048895	0.092227583
0.00555057	-2.624626821	0.000912211	18.229593	0.453969726	7.31676515	0.110246536	332.9397548	-0.065346253	-0.004662591	0.271734862	0.0399352	-47.75575457	0.105465044
1.590637146	-2.050840628	0.15639557	20.03214575	3.289652273	5.492288689	0.188747247	402.1072589	-2.778545388	0.337928351	31.58096966	-0.141606196	-41.37586989	3.23636251

GPS Latitude	GPS STDev Latitude	GPS Longitude	GPS STDev Longitude	Mean CO ₂ (ppm)	STDev CO ₂ (ppm)	5% of the Data	Highest Methane (ppm)	Mean of the Highest 5% of Methane Conc (ppm)	STDev of the Highest 5% of Methane Conc (ppm)	Lowest Methane (ppm)	Background Methane (ppm)	STDev of the Background Methane (ppm)	Mean Methane (ppm)	Mean Methane - bkg (ppm)
42.824	2.24E-12	-109.89	6.88E-12	406.5931	1.744056	121.95	5.328	4.023955	0.321303	1.8997	1.916692	0.007905	2.339454	0.422763
42.824	2.27E-12	-109.89	6.94E-12	402.0346	1.463576	122.85	5.3117	3.988144	0.335346	1.9409	1.956655	0.005409	2.309635	0.35298
42.824	3.84E-13	-109.89	5.26E-13	399.2293	0.809249	49.4	2.4732	2.260284	0.090979	1.8552	1.880253	0.007914	2.004422	0.124169

3DS 3D Wind Speed (m/s)	Temperature (K)	Mean 2DWind (deg)	Mean 3DWind (deg)	Std WD 2D (deg)	Std WD 3D (deg)	Turbulent Intensity
2.716495	289.8942	98.23194	179.9042	14.02502	13.23402	0.116439
2.713028	291.9245	91.33561	179.8788	16.9099	15.209	0.122409
2.828824	293.8543	143.632	142.2028	30.63098	22.72537	0.143356

WS 2D PGI	WS 3D PGI	StdDev. WD 2D PGI	StdDev. WD 3D PGI	Turbulent Intensity PGI	Weighted Avg. PGI	Estimated PGI	PGσ _y (m)	PGσ _z (m)	Centroid Dir (deg)	Angle BinSize (deg)	Wind Speed Cut (m/s)	Accept Angle Limit (+/- deg)	Bin Density Cut (%)
3	3	5	5	5	5	5	5.46	3.29	155	10	0	60	2
3	3	4	5	5	4.5	5	5.46	3.29	155	10	0	60	2
3	3	1	3	4	2.5	3	8.53	4.62	95	10	0	60	2

a1 (ppm)	σ (deg)	CH4 a1 (g/m3)	σ _y (m)	rsq	BinQA	Count QA	Temp QA	3Dtemp stdev QA	3Dtemp min QA	3Dtemp max QA	PSG Emission Estimate (g/s)
1.300288	9.907165	0.000671	7.107135	0.973213	16	770	1.001658	0.679156	14.95	18.88	0.205844
0.967607	11.11894	0.000496	7.98161	0.982744	16	575	1.00187	0.788636	16.41	21.03	0.151885
0.161344	27.31359	8.22E-05	19.92395	0.930456	10	196	1.002292	0.906216	18.6	23.16	0.057542

Complete list of headings (defined on following pages):

1. Filename
2. Event
3. Distance (m)
4. Sensor Height (m)
5. Source Height (m)
6. a1 + bkgCH4 (ppm)
7. bkgCH4 (ppm)
8. Pressure (mbar)
9. <u>
10. <v>
11. <w>
12. <t>
13. <u2>
14. <v2>
15. <w2>
16. <t2>
17. <uv>
18. <uw>
19. <ut>
20. <vw>
21. <vt>
22. <wt>
23. GPS Latitude
24. GPS STDev Latitude
25. GPS Longitude
26. GPS STDev Longitude
27. Mean CO₂ (ppm)
28. STDev CO₂ (ppm)
29. 5% of the Data
30. Highest Methane (ppm)
31. Mean of the Highest 5% of Methane Conc (ppm)
32. STDev of the Highest 5% of Methane Conc (ppm)
33. Lowest Methane (ppm)
34. Background Methane (ppm)
35. STDev of the Background Methane (ppm)
36. Mean Methane (ppm)
37. Mean Methane - bkg (ppm)
38. 3DS 3D Wind Speed (m/s)
39. Temp. (K)
40. Mean 2DWind (deg)
41. Mean 3DWind (deg)
42. Std WD 2D (deg)
43. Std WD 3D (deg)
44. Turbulent Intensity
45. WS 2D PGI
46. WS 3D PGI
47. StdDev. WD 2D PGI
48. StdDev. WD 3D PGI
49. Turbulent Intensity PGI
50. Weighted Avg. PGI
51. Estimated PGI
52. PG σ_y (m)
53. PG σ_z (m)
54. Centroid Dir (deg)
55. Angle Bin Size (deg)
56. wind Speed Cut (m/s)
57. Accept Angle Limit (+/- deg)
58. Bin Density Cut (%)
59. a1 (ppm)
60. σ (deg)
61. CH4 a1 (g/m³)
62. σ_y (m)
63. rsq
64. BinQA
65. Count QA
66. Temp QA
67. 3Dtemp stdev QA
68. 3Dtemp min QA
69. 3Dtemp max QA
70. PSG Emission Estimate (g/s)

Heading Definitions

Filename: Study code and date of survey, denoted by SSMDDYY where SS=study code, MM=month, DD=day, and YY=year.

Event: Event is the experiment number of the given day.

Distance (m): The distance from the measurement location to the methane emission source. This value is originally entered by the user in the field, and the MATLAB Analysis code pulls it from the STR file created.

Sensor Height (m): The height of the sensor. This value is entered by the user in the field. If no value is entered, the default value is zero.

Source Height (m): The height of the source, and often the user cannot measure it. In this case, the default value entered is zero.

A1 + bkgCH4: Peak methane value obtained from the Gaussian fit added to the background methane value

bkgCH4 (ppm): The background methane concentration which is calculated to be the mean of the lowest 5 % of the methane concentration values.

Pressure (mbar): The mean ambient pressure value measured in mbar.

<u>: The mean value of the velocity in the y direction

<v>: The mean value of the velocity in the x direction

<w>: The mean value of the velocity in the z direction

<t>: The mean temperature value in degrees Celsius

<u2>: The mean value of the dot product of u.u

<v2>: The mean value of the dot product of v.v

<w2>: The mean value of the product of w.w

<t2>: The mean value of the product of t.t, where t is measured temperature in degrees Celsius.

<uv>: The mean value of the dot product of u and v

<uw>: The mean value of the dot product of u and w

<ut>: The mean value of the dot product of u and t

<vw>: The mean value of the dot product of v and w

<vt>: The mean value of the dot product of v and t

<wt>: The mean value of the dot product of w and t

GPS Latitude: The average GPS latitude of the location where the measurements were collected

GPS STDev Latitude: Computed standard deviation of the GPS Latitude values

GPS Longitude: The average GPS longitude of the location where the measurements were collected

GPS STDev Longitude: Computed standard deviation of the GPS Longitude values

Mean CO₂ (ppm): The average carbon dioxide values measured in ppm

STDEV CO₂: Computed standard deviation of the carbon dioxide values

5% of the Data: Number of data values in 5% of the data

Highest Methane: Highest methane concentration value recorded during the survey

Mean of the Highest 5% of Methane Conc (ppm): Average of the highest 5 % of the methane concentration values measured in ppm

STDev of the Highest 5% of Methane Conc: Standard deviation of the highest 5 % of methane concentration values

Lowest Methane: The lowest methane concentration value measured during the survey

Background Methane: The average of the lowest 5 % of methane concentration values

STDev of the Background Methane: Standard deviation of the lowest 5 % of methane concentration values

Mean Methane: The average of all the methane concentration values recorded, after the time alignment, during the survey

Mean Methane-bkg: Value obtained after subtracting the average methane concentration value from the computed background methane concentration value

3DS 3D Wind Speed: The computed wind speed performed in the MATLAB Analysis code using data from the 3D Sonic Anemometer

Temp.: The average ambient temperature value during the survey, in degrees Kelvin

Mean 2DWind: The average value of the absolute wind direction computed by the MATLAB code using data from the AIO Compact Weather Station

Mean 3DWind: The average value of the azimuthal rotated wind direction calculated by the MATLAB code using data from the 3D Sonic Anemometer

Std WD 2D: Standard deviation of the absolute wind direction measured with the 3D Sonic Anemometer

Std WD 3D: Standard deviation of the azimuthal rotated wind direction measured with the 3D Sonic Anemometer

Turbulent Intensity: Ratio of the standard deviation of the wind speed in the z direction to the calculated mean wind speed

WS 2D PGI: Wind Stability Class based on the AIO Compact Weather Station Wind Speed value

WS 3D PGI: Wind Stability Class based on the 3D Wind Speed value

StdDev. WD 2D PGI: Wind Stability Class based on the standard deviation of the wind direction measured by the AIO Compact Weather Station

StdDev. WD 3D PGI: Wind Stability Class based on the standard deviation of the wind direction measured by the 3D Sonic Anemometer

Turbulent Intensity PGI: Wind Stability class based on the turbulent intensity

Weighted Avg. PGI: This is the average of the Wind Stability Class

Estimated PGI: Since the weighted average PGI may not be an integer, the MATLAB analysis code converts the weighted average PGI value to an integer

PGoy: Plume width in the y-direction in meters retrieved from wind stability class tables presented in Appendix A

PGoz: Plume height in the z-direction in meters retrieved from wind stability class tables presented in Appendix A

Centroid Dir: Centroid angle in degrees

Angle Bin Size: Size of angle bins for Gaussian fit (default value of 10 degrees)

Wind Speed Cut: Wind speed filter value designating that wind speed values must be above a certain value to be included in data analysis

Accept Angle Limit: Value chosen for wind direction filter (default value is 60 degrees)

Bin Density Cut: Value designating that every wind angle bin must have this percentage of data to be included in the data analysis

a1: Peak methane value retrieved from Gaussian fit of methane concentration values

σ : Plume width in the y-direction in degrees retrieved from Gaussian fit of methane concentration values

CH4 a1: a1 value converted to units of g/m^3

σ_y : Plume width in degrees converted into units of distance (meters)

rsq: R square value of the Gaussian fit of methane concentration data, indicating how well the fit matches the data points

CountQA: Maximum number of values in the bin

TempQA: Ratio of the mean temperature measured by the AIO Weather Station to the mean temperature measured by the 3D Sonic Anemometer

3Dtemp stdev QA: Standard deviation of the 3D Sonic Anemometer temperature in degrees Celsius

3Dtemp min QA: Minimum value of the 3D Sonic Anemometer temperature in degrees Celsius

3Dtemp max QA: Maximum value of the 3D Sonic Anemometer temperature in degrees Celsius

PSG Emission Estimate: Methane emission estimate in grams per second

Appendix E:

***WindCH4 Source.m* Program Code**

```
% This code is used to produce a plot of methane concentrations measured
during a survey as a function of wind direction. The plot is utilized to
determine the source location(s) based upon
% the wind speed and the wind direction. The program uses the absolute wind
% direction from the Climatronics wind monitor & the azimuthal from the Sonic
% anemometer.

clear

files2 = dir('Processed*.csv'); % Locating the Processed files from the
directory which are the Time Aligned files.
disney0 = [];
wdmeth = csvread(files2.name); % Reading the files

meth = wdmeth(:,5); % Methane Concentration

    %wddir = wdmeth(:,11); % Sonic Wind Direction
    wddir = wdmeth(:,7); % Climatronics Wind Direction
    wddir1 = wddir.*(pi./180); % Converting to Radians
    ws = wdmeth(:,10); % This is the Calculated wind speed from the Processed
Files, and this value was obtained from the calculation done in the Analysis
file
    lat = wdmeth(:,2); % Latitude of the Measurement
    long = wdmeth(:,3); % Longitude of the Measurement

    meanlat = mean(lat(:,1)); % Average of the Latitude values
    meanlong = mean(long(:,1)); % Average of the Longitude values

    for il = 1:length(meth)
        if meth(il) == 0
            meth(il) = 1;
        end
    end

% Specifying the naming convention of the Wind Files
disney = files2.name;
disney1 = isletter(disney);
disney2 = find(disney1 == 0);
disney3 = disney(disney2);
disney4 = str2num(disney3(2:8));
disney5 = str2num(disney3(10:end));
disney0 = [disney0; disney4 disney5];

[x,y,z] = pol2cart(wddir1,ws,meth); % Converting from the Polar to Cartesian
Coordinates

m = length(y);
n = length(x);
[m n] = size(z);

% Here, we are plotting the wind histogram; specifying the coordinate
% system in a clockwise polar coordinate; and then saving the files in the
directory
rose(wddir1)
```

```
hline = findobj(gca,'Type','line');
set(hline,'LineWidth',2)
hHiddenText = findall(gca,'type','text');

view([90,-90]);

angles = 0:30:330;

hObjToDelete = zeros( length(angles)-2, 1 );
k = 0;
for ang = angles
    hObj = findall(hHiddenText,'string',num2str(ang));
    switch ang

        case 0
            set(hObj,'string','North','VerticalAlignment','Top','FontSize',12);
        case 90
            set(hObj,'string','East','HorizontalAlignment','Left','FontSize',12);
        case 180
            set(hObj,'string','South','VerticalAlignment','Top','FontSize',12);
        case 270
            set(hObj,'string','West','HorizontalAlignment','Right','FontSize',12);

        otherwise
            k = k + 1;
            hObjToDelete(k) = hObj;
    end
end
delete( hObjToDelete(hObjToDelete~=0) );

set(gca,'fontsize',15);
title('Wind Direction Histogram','FontWeight','Bold');

imagedwhist = getframe(gcf);
WindHist =
sprintf('WindHist#%s.jpg',strcat(num2str(disney4),'_',num2str(disney5)));
imwrite(imagedwhist.cdata, WindHist,'Quality',100);

%%%% This part of the code plots the methane concentration in variation
%%%% with wind speed and direction in a clockwise polar coordinate. This plot
%%%% does show the relative
%%%% location of the source(s).

source = polar(wddir1,ws);

hold on
set(source,'Visible','Off');

scatter(x,y,meth/5,meth,'fill','o','Linewidth',2);
text(mean(ws),mean(wddir1),'WS (m/s)','FontSize',10)
h1 = colorbar;

set(get(h1,'title'),'string','CH4 (ppm)','FontSize',15,'FontAngle','italic');

situate = get(h1,'title');
posit = get(situate,'position');
```

```
posit(1,:) = min(meth) - 1; % Specifying position of the colorbar title
posit(1,1) = posit(1,1) +1;
set(situate,'posit',posit);

set(gca,'fontsize',18);
title('Methane Source(s)','FontWeight','bold');

hHiddenText = findall(gca,'type','text');

view([90,-90]);

angles = 0:30:330;

hObjToDelete = zeros( length(angles)-2, 1 );

%k = 0;
for ang = angles
    hObj = findall(hHiddenText,'string',num2str(ang));
    switch ang
        case 0
            set(hObj,'string','North','VerticalAlignment','Top','FontSize',12);

        case 90
            set(hObj,'string','East','HorizontalAlignment','Left','FontSize',12);
        case 180
            set(hObj,'string','South','VerticalAlignment','Top','FontSize',12);
        case 270
            set(hObj,'string','West','HorizontalAlignment','Right','FontSize',12);

        otherwise
            % k = k + 1;
            % hObjToDelete(k) = hObj;
    end
end
delete( hObjToDelete(hObjToDelete~=0) );

imagewd = getframe(gcf);
SourceIdentify =
sprintf('CH4Source#%s.jpg',strcat(num2str(disney4),'_',num2str(disney5)));
imwrite(imagewd.cdata, SourceIdentify,'Quality',100);

% Mapping
% This is optional part of the code; This code draws a US map and depending
% upon the given latitude and longitude limit it can directly name the given
% state(s) and point the measurement location
```

```
latlim1 = [41 45];
longlim1 = [-111.05 -104.05];
figure(1000)
ax1 = usamap(latlim1,longlim1);
axis off

states = shaperead('usastatehi',...
    'UseGeoCoords', true, 'BoundingBox', [longlim1', latlim1']]);

faceColors = makesymbolspec('Polygon',...
    {'INDEX', [1 numel(states)], ...
    'FaceColor', polcmap(numel(states))});

geoshow(ax1, states, 'SymbolSpec', faceColors)

for k = 1:numel(states)
    labelPointIsWithinLimits =...
        latlim1(1) < states(k).LabelLat &&...
        latlim1(2) > states(k).LabelLat &&...
        longlim1(1) < states(k).LabelLon &&...
        longlim1(2) > states(k).LabelLon;
    if labelPointIsWithinLimits
        textm(states(k).LabelLat,...
            states(k).LabelLon, states(k).Name, ...
            'HorizontalAlignment',
            'center', 'FontSize',15, 'FontWeight', 'bold', 'FontAngle', 'italic')
    end
end

textm(meanlat,meanlong, '***',...
    'FontSize',20, 'fontweight', 'bold', 'Rotation',0, 'BackgroundColor', [0 1 0] )
title('Measurement Location', 'FontWeight', 'bold', 'FontSize',18);

imagemap = getframe(gcf);
imwrite(imagemap.cdata, 'Map.jpg', 'Quality',100);

a2 = imread(SourceIdentify, 'jpg');
ra2 = imref2d(size(a2));
a3 = imread('Map.jpg');
ra3 = imref2d(size(a3));
ra2.XWorldLimits = ra3.XWorldLimits;
ra2.YWorldLimits = ra3.YWorldLimits;

[a4,rc2] = imfuse(a2,ra2,a3,ra3, 'montage', 'Scaling', 'none');
SourceMapIdentify =
sprintf('CH4S&MeasLoc#%s.jpg', strcat(num2str(disney4), '_', num2str(disney5)));

imwrite(a4,SourceMapIdentify, 'Quality',100);

close all
```


SOP for Analysis of US EPA GMAP-REQ-DA Method Data for Methane
Emission Rate Quantification using the Point Source Gaussian Method

SOP 601 for OTM 33A
September 2013 (Revision 0)

Page 64 of 64