

DRAFT  
December 14, 2010

**Greenhouse Gas Emissions Estimation  
Methodologies for Biogenic Emissions  
from Selected Source Categories:  
Solid Waste Disposal  
Wastewater Treatment  
Ethanol Fermentation**

Submitted to:

U.S. Environmental Protection Agency  
Sector Policies and Programs Division  
Measurement Policy Group

Submitted by:

RTI International  
3040 Cornwallis Road  
Research Triangle Park, NC 27709-2194

EPA Contract No. EP-D-06-118  
Work Assignment 4-18  
RTI Project Number 0210426.004.018



\*RTI International is a Trade Name of Research Triangle Institute

*[This page intentionally left blank]*

## Table of Contents

Acronyms and Abbreviations .....	iv
1. Background and Scope .....	1-1
2. Solid Waste Disposal.....	2-1
2.1 Landfills.....	2-1
2.1.1 CH <sub>4</sub> Generation.....	2-2
2.1.2 CO <sub>2</sub> Emissions for Landfills without Gas Collection Systems.....	2-5
2.1.3 CO <sub>2</sub> Emissions for Landfills with Gas Collection Systems.....	2-6
2.2 Composting Operations .....	2-11
2.3 Land Treatment Units.....	2-13
3. Wastewater Treatment .....	3-1
3.1 Biological Treatment Processes.....	3-1
3.1.1 Aerobic Treatment Processes .....	3-1
3.1.2 Anaerobic Treatment Processes.....	3-2
3.1.3 Facultative Treatment Processes.....	3-2
3.2 Estimating CH <sub>4</sub> and CO <sub>2</sub> Emissions .....	3-2
3.2.1 Estimating CH <sub>4</sub> and CO <sub>2</sub> Emissions from Wastewater and Sludge Treatment Units .....	3-4
3.2.2 Estimating CH <sub>4</sub> and CO <sub>2</sub> Emissions from Combustion of Biogas .....	3-10
3.3 Estimating N <sub>2</sub> O Emissions .....	3-10
4. Ethanol Fermentation .....	4-1
4.1 CO <sub>2</sub> Emissions from Sugar- and Starch-based Ethanol Fermentation .....	4-1
4.2 CO <sub>2</sub> Emissions from Cellulosic Ethanol Fermentation .....	4-4
4.3 CO <sub>2</sub> Emissions from Direct Measurement Data .....	4-5
5. References .....	5-1

## List of Figures

Figure 3-1. Activated sludge wastewater treatment flow diagram. ....	3-2
Figure 3-2. Simplified stoichiometric equation for the biochemical oxidation of organic constituents in wastewater. ....	3-3
Figure 3-3. Simplified reaction mechanisms for nitrification and denitrification N <sub>2</sub> O formation. ....	3-10

## List of Tables

Table 1-1. Global Warming Potentials for 100-Year Time Horizon <sup>a</sup> .....	1-3
Table 2-1. Recommended DOC (Degradable Organic Carbon) and Decay Rate Values for Landfills <sup>a</sup> .....	2-3
Table 2-2. Additional Landfill Model Defaults .....	2-4
Table 2-3. Default Landfill Gas Collection Efficiencies .....	2-8
Table 2-4. Default Emission Factors for Composting .....	2-12
Table 3-1. Default Values for Methane Correction Factor and Biomass Yield.....	3-5
Table 3-2. Correction Factors for Equations 3-2 through 3-4 for Different Measurement Method .....	3-7

## Acronyms and Abbreviations

°R	degrees Rankine (= °F + 460)
acf	actual cubic feet
atm	atmospheres
BACT	best available control technology
BOD	biochemical oxygen demand
BOD5	5-day biochemical oxygen demand
C	carbon
CAA	Clean Air Act
CFR	Code of Federal Regulations
CH <sub>4</sub>	methane
cm	centimeter
cBOD	carbonaceous biochemical oxygen demand
CO	carbon monoxide
CO <sub>2</sub>	carbon dioxide
CO <sub>2e</sub>	carbon dioxide equivalents
COD	chemical oxygen demand
dscf	dry standard cubic feet
EPA	U.S. Environmental Protection Agency
EtOH	ethanol
FR	Federal Register
g	gram
gal	gallon
Gg	gigagram
GHG	greenhouse gas
GWP	global warming potential
H <sub>2</sub>	hydrogen
H <sub>2</sub> S	hydrogen sulfide
IPCC	Intergovernmental Panel on Climate Change
kg	kilogram
L	liter
lb	pound
m <sup>3</sup>	cubic meter
Mg	megagram (= 1 metric ton)
mg	milligram
MLVSS	mixed liquor volatile suspended solids
mol	mole
MSW	municipal solid waste
N <sub>2</sub>	nitrogen
N <sub>2</sub> O	nitrous oxide
O <sub>2</sub>	oxygen
POTW	publicly owned treatment works
PSD	Prevention of Significant Deterioration
psig	pounds per square inch, gauge
scf	standard cubic feet
t	short ton
Tg	teragram (= 10 <sup>6</sup> metric ton)
TKN	total Kjeldahl nitrogen
TN	total nitrogen
TOC	total organic carbon

tpy            tons per year (short tons)  
WWTP        wastewater treatment plant  
yr            year

## 1. Background and Scope

This technical guidance document describes emissions estimation techniques for greenhouse gas (GHG) air emissions from solid waste disposal, wastewater treatment, and ethanol fermentation, all anthropogenic source categories that can produce GHG emissions through biological processes involving living organisms (i.e., biogenic emissions).

In reviewing the general availability of GHG emissions estimation methods for different source categories that may be potentially affected by Clean Air Act (CAA) requirements, the U.S. Environmental Protection Agency (EPA) identified several gaps in the availability of technical guidance for the estimation of emissions for certain biogenic emissions. For example, while EPA's mandatory reporting rule for GHGs contains estimation methods for methane (CH<sub>4</sub>) from landfills, it does not contain methods for carbon dioxide (CO<sub>2</sub>) emissions from landfills. To address these gaps, this technical guidance document provides emissions estimation techniques for the following GHG emissions sources:

- Solid Waste Disposal
  - CO<sub>2</sub> from landfill biogas
  - CO<sub>2</sub> from biogas combustion
  - CO<sub>2</sub>, CH<sub>4</sub>, and nitrous oxide (N<sub>2</sub>O) from composting operations
  - CO<sub>2</sub> from land treatment units.
- Wastewater Treatment (publicly owned treatment works [POTWs] and industrial)
  - CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O from wastewater treatment processes
  - CO<sub>2</sub> and CH<sub>4</sub> from sludge digesters
  - CO<sub>2</sub> from digester gas combustion.
- Ethanol Fermentation
  - CO<sub>2</sub> from ethanol fermentation processes.

Reference sources considered in developing this technical guidance included the results of EPA's July 15, 2010, *Call for Information: Information on Greenhouse Gas Emissions Associated with Bioenergy and Other Biogenic Sources*, used to solicit information and viewpoints from interested parties on approaches to accounting for GHG emissions from bioenergy and other biogenic sources (75 FR 41173). The purpose of this Call for Information was to request comment on possible accounting approaches for biogenic emissions, as well as to receive data submissions about these sources and their emissions, general technical comments on accounting for these emissions, and comments on the underlying science that should inform any such accounting approach. In this notice, EPA identified bioenergy and other biogenic sources as those with GHG emissions that are generated during the combustion or decomposition of biologically based material, and include sources such as utilization of forest or agricultural products for energy; wastewater treatment and livestock management facilities; landfills; and fermentation processes for ethanol production.

In this notice, EPA specifically requested the following information on other biogenic sources of CO<sub>2</sub>:

“Other biogenic sources of CO<sub>2</sub> (i.e., sources not related to energy production and consumption) such as landfills, manure management, wastewater treatment, livestock respiration, fermentation processes in ethanol production, and combustion of biogas not resulting in energy production (e.g., flaring of collected landfill gas) may be covered under certain provisions of the CAA, and guidance will be needed about exactly how to estimate them. How should these “other” biogenic CO<sub>2</sub> emission sources be considered

and quantified? In what ways are these sources similar to and different from bioenergy sources?” (75 FR 41173)

Where available, using measured data to estimate emissions for sources is always preferable to using the emission-estimating methods presented in this report. The information presented in this document does not represent an official EPA position on the emissions estimation procedures. It is not intended to be an official statement of policy and standards and does not establish any prescriptive requirements to apply such methods under various program areas covered by the CAA, such as for air permitting applicability determinations; such requirements are proposed and confirmed on a case-by-case basis through discussions with the applicable permitting or regulatory authority. In addition, this document is not intended to be an endorsement of any method for calculating emissions, nor does it necessarily represent all potentially available methods for calculating emissions. Accordingly, the information in this document is presented for informational purposes only.

In using these methods, it is important to note that this guidance does not make or infer any policy determination on the part of EPA as to whether, or what part of, emissions from any of these sources may be determined to be considered “fugitive” emissions for the purposes of accounting and applicability under air permitting requirements. Such determinations are not the scope of this technical guidance document and are part of the case-by-case application and review process established under the regulations covering these permitting requirements. As such, the methods included in this guidance do not differentiate whether the estimated emissions may or may not be considered fugitive.

For convenience, **Table 1-1** provides the global warming potentials (GWP) for the GHG considered in this technical guidance document; these values are needed to convert emissions of CH<sub>4</sub> and N<sub>2</sub>O to CO<sub>2</sub> equivalents as follows.

$$CO_{2e} = \sum_{i=1}^n (GHG_i \times GWP_i) \quad (1-1)$$

where

- $CO_{2e}$  = Emissions in carbon dioxide equivalents (short tons per year [tpy])
- $GHG_i$  = Emissions of GHG pollutant “i” (tpy)
- $GWP_i$  = GWP of GHG pollutant “i” (from **Table 1-1**)
- $n$  = Number of GHG emitted from the source.

Emissions estimation methodologies provided in this document calculate emissions in units of tpy. These units agree with the thresholds established by the Tailoring Rule requirements for determining permit applicability. Where intermediate calculations in this document include metric measurements, such as megagrams (Mg), in order to provide consistency with previously published calculation methodologies such as those in use by the Intergovernmental Panel on Climate Change (IPCC). Final emissions results are converted to tpy using the following conversion:

$$\text{tpy} = \text{Mg} \times 1.1$$

**Table 1-1. Global Warming Potentials for 100-Year Time Horizon<sup>a</sup>**

Pollutant Name	Chemical Formula	CAS No.	Global Warming Potential
Carbon dioxide	CO <sub>2</sub>	124-38-9	1
Methane	CH <sub>4</sub>	74-82-8	21
Nitrous oxide	N <sub>2</sub> O	10024-97-2	310

<sup>a</sup>Source: 40 CFR part 98 subpart A, Table A-1. Note the GWP values presented in this table are subject to change if changes occur by rulemaking or notice to Table A-1 in the Reporting Rule. GWP values can be updated in the future; however, only a rulemaking on the Reporting Rule would supersede the values in this table.



*[This page intentionally left blank]*

## 2. Solid Waste Disposal

Solid waste disposal sites are used to treat or dispose of solid wastes and include landfills, land treatment units, waste piles, and composting operations. Organic matter contained in the waste material at solid waste disposal sites can undergo biological transformation to produce CO<sub>2</sub> under aerobic conditions and a mixture of CH<sub>4</sub> and CO<sub>2</sub> under anaerobic conditions.

Landfills are the predominant type of solid waste disposal site in the United States and have been studied specifically for their contribution to climate change primarily due to their CH<sub>4</sub> production. Other solid waste disposal sites may also be important when considering CO<sub>2</sub> emissions. Waste piles are generally used for temporary storage rather than long-term disposal, so waste material is not expected to undergo significant degradation in waste piles unless the waste pile is specifically managed for biodegradation (i.e., a composting operation). Composting operations and land treatment units are specifically operated for the aerobic degradation of organic waste materials, and therefore, can have significant CO<sub>2</sub> emissions.

This section discusses emissions estimation techniques for landfills (**Section 2.1**), composting operations (**Section 2.2**), and land treatment units (**Section 2.3**). In general, the methods presented in this section are applicable for estimating long-term (e.g., monthly or annual) average emissions. With the exception of biogas recovery systems, which may have short-term measurement data, methods for estimating hourly emissions are not available. When short-term measurement data are available from biogas recovery systems, these measurements should be used to estimate hourly emissions; otherwise, hourly emissions can be estimated as 4 times the annual average hourly emission rate. This factor of four is an estimate based on comments received on Subpart HH of the GHG mandatory reporting rule that landfill gas generation and composition does not vary significantly (see 74 FR 56336 and U.S. EPA, 2009)

### 2.1 Landfills

After being placed in a landfill, waste is initially decomposed by aerobic bacteria. Once that process depletes the available oxygen, anaerobic bacteria begin to consume the remaining waste, breaking the organic matter down into substances such as cellulose, amino acids, and sugars. Through fermentation, these substances are further broken down into gases and short-chain organic compounds that form the substrates for the growth of methanogenic bacteria. These CH<sub>4</sub>-producing anaerobic bacteria convert the fermentation products into stabilized organic materials and biogas. Typical biogas contains primarily CH<sub>4</sub> and CO<sub>2</sub>. As the biogas rises to the surface of the landfill, some oxidation of CH<sub>4</sub> (to CO<sub>2</sub>) occurs near the soil surface, where aerobic degraders persist. In landfills with active gas collection systems, the biogas is collected (prior to reaching this aerobic soil layer), along with some infiltration air (nitrogen and oxygen).

Biogas composition has been measured primarily at sites with active landfill gas collection systems; the average composition of the biogas is 41% CH<sub>4</sub>; 34% CO<sub>2</sub>; 22% nitrogen (N<sub>2</sub>); and 3% oxygen (O<sub>2</sub>) (U.S. EPA, 2008). Although the composition of biogas will depend on the amount of infiltration air, it is commonly assumed that approximately 50% of the carbon degraded within the landfill will be converted to CH<sub>4</sub>, and the remaining 50% will be converted to CO<sub>2</sub>, with only trace quantities of carbon being released as carbon monoxide (CO). Trace quantities of volatile organic chemicals are also released, primarily by volatilization of the chemicals contained in the waste material.

Biogas generation is commonly modeled using the first-order decay model (IPCC, 2006; U.S. EPA, 2008). Aerobic degradation occurs for a short period (typically less than a month), after which the buried waste becomes oxygen deprived. It can take several more months to a year before significant anaerobic degradation occurs (IPCC, 2006). Due to the short nature of the initial aerobic degradation period, minimal error is introduced by assuming no degradation of material in this initial “lag-phase” of landfill biogas generation. Consequently, the same models used to estimate CH<sub>4</sub> emissions from landfills can be

used to estimate CO<sub>2</sub> emissions from landfills. The Landfill Gas Emission Model (LandGEM, v3.02; U.S. EPA, 2005) calculates CO<sub>2</sub> emissions from landfills assuming that the volume of CO<sub>2</sub> released equals the volume of CH<sub>4</sub> as a default (CH<sub>4</sub> content = 50% by volume). LandGEM does not specifically account for additional soil oxidation of CH<sub>4</sub>. In developing the U.S. inventory of CH<sub>4</sub> emissions from landfills, it was assumed that 10% of the CH<sub>4</sub> in uncaptured landfill gas is converted to CO<sub>2</sub> (U.S. EPA, 2010a).

### 2.1.1 CH<sub>4</sub> Generation

The first-order decay model for CH<sub>4</sub> generation is as follows (adapted from IPCC, 2006 and U.S. EPA, 2008):

$$A = \left[ \sum_{x=S}^{T-1} \left\{ W_x L'_x \left( e^{-k(T-x-1)} - e^{-k(T-x)} \right) \right\} \right] \quad (2-1)$$

where

- $A$  = CH<sub>4</sub> generation (Mg/yr)
- $x$  = Year in which waste was disposed
- $S$  = Start year of inventory calculation
- $T$  = Inventory year for which emissions are calculated
- $W_x$  = the quantity of waste disposed at the solid waste disposal site (Mg)
- $L'$  = CH<sub>4</sub> generation potential (Mg CH<sub>4</sub>/Mg waste)
  - = MCF × DOC × DOC<sub>F</sub> × F × 16 / 12 [IPCC nomenclature]
  - = L<sub>0</sub> × 16/0.02367 × 10<sup>-6</sup>
- $L_0$  = CH<sub>4</sub> generation potential (m<sup>3</sup> CH<sub>4</sub>/Mg waste) [AP-42 nomenclature]
- $MCF$  = CH<sub>4</sub> correction factor (fraction), typically 1 for managed landfills
- $DOC$  = degradable organic carbon [fraction (Mg C in waste/Mg waste)]
- $DOC_F$  = fraction of DOC decomposed (fraction), generally assumed to be 0.5
- $F$  = fraction by volume of CH<sub>4</sub> in landfill gas, generally assumed to be 0.5
- $k$  = decay rate constant (yr<sup>-1</sup>).

This is the total quantity of CH<sub>4</sub> generated in the landfill in Mg, and is not corrected for soil oxidation.

Default parameters consistent with the GHG Reporting Rule for municipal solid waste (MSW) landfills (40 CFR part 98, subpart HH) and for industrial waste landfills (40 CFR part 98, subpart TT) are provided in **Tables 2-1 and 2-2**.

Either the IPCC waste model (IPCC, 2006) or LandGEM (v3.02; U.S. EPA, 2005) can be used to determine the CH<sub>4</sub> generation rate,  $A$ . The advantage of the IPCC waste model is that several waste types can be modeled at the same time. Therefore, if multiple different types of waste are disposed of in the landfill, quantities for each type of waste material can be entered into the IPCC waste model and the model will calculate the results for each waste type and the cumulative total quantity in the Results tab. However, the IPCC waste model does not calculate CO<sub>2</sub> generation. LandGEM directly calculates both CH<sub>4</sub> and CO<sub>2</sub> generation, but can only model one waste type at a time. However, for the bulk waste option or for specific industrial waste landfills, only one model run is generally necessary.

**Table 2-1. Recommended DOC (Degradable Organic Carbon) and Decay Rate Values for Landfills<sup>a</sup>**

Waste Model/Waste Type	DOC (weight fraction, wet basis)	k [dry climate <sup>b</sup> ] (yr <sup>-1</sup> )	k [moderate climate <sup>b</sup> ] (yr <sup>-1</sup> )	k [wet climate <sup>b</sup> ] (yr <sup>-1</sup> )
<b>MSW Landfills—Bulk Waste Option</b>				
All waste materials	0.2028	0.02	0.038	0.057
<b>MSW Landfills—Bulk MSW Option</b>				
Bulk MSW	0.30	0.02	0.038	0.057
Construction and demolition waste	0.08	0.02	0.03	0.04
Inert waste (glass, metal, plastic)	0.0	0.0	0.0	0.0
<b>MSW Landfills—Waste-Specific Option</b>				
Food waste	0.15	0.06 <sup>c</sup>	— <sup>c</sup>	0.185 <sup>c</sup>
Garden waste	0.20	0.05 <sup>c</sup>	— <sup>c</sup>	0.10 <sup>c</sup>
Paper waste	0.40	0.04 <sup>c</sup>	— <sup>c</sup>	0.06 <sup>c</sup>
Wood and straw waste	0.43	0.02 <sup>c</sup>	— <sup>c</sup>	0.03 <sup>c</sup>
Textile waste	0.24	0.04 <sup>c</sup>	— <sup>c</sup>	0.06 <sup>c</sup>
Diapers	0.24	0.05 <sup>c</sup>	— <sup>c</sup>	0.10 <sup>c</sup>
Sewage sludge	0.05	0.06 <sup>c</sup>	— <sup>c</sup>	0.185 <sup>c</sup>
Inert waste (glass, metal, plastic)	0.0	0.0	0.0	0.0
<b>Industrial Waste Landfills</b>				
Food processing industry	0.22	0.06	0.12	0.18
Pulp and paper industry	0.20	0.02	0.03	0.04
Wood and wood products	0.43	0.02	0.03	0.04
Construction and demolition waste	0.08	0.02	0.03	0.04
Inert waste (glass, metal, plastic)	0	0	0	0
Other industrial solid waste (not otherwise listed)	0.20	0.02	0.04	0.06

<sup>a</sup> Taken from 40CFR part 98, subparts HH and TT (with expected corrections for DOC for construction and demolition waste in subpart TT).

<sup>b</sup> The applicable climate classification is determined based on the annual rainfall plus the recirculated leachate application rate. Recirculated leachate application rate (in inches/year) is the total volume of leachate recirculated and applied to the landfill divided by the area of the portion of the landfill containing waste (with appropriate unit conversions). Unless otherwise specified, the classifications are as follows:

- Dry climate = precipitation plus recirculated leachate less than 20 inches/year
- Moderate climate = precipitation plus recirculated leachate from 20 to 40 inches/year (inclusive)
- Wet climate = precipitation plus recirculated leachate greater than 40 inches/year.

<sup>c</sup> The climate is considered dry when the potential evapotranspiration rate exceeds the mean annual precipitation rate plus recirculated leachate. The climate is considered wet when the potential evapotranspiration rate does not exceed the mean annual precipitation rate plus recirculated leachate.

**Table 2-2. Additional Landfill Model Defaults**

Parameter	Parameter Description	Parameter Value
MCF	Methane correction factor (dimensionless)	1
DOC <sub>F</sub>	Fraction of DOC degraded	0.5
F	Fraction CH <sub>4</sub> in generated gas	0.5
OX	Soil oxidation factor (dimensionless) [IPCC model only, in the Recovery_OX tab]	0.10
Delay Time	Time (in months) prior to the start of anaerobic decay [IPCC model only]	6

### **Tips for Using the IPCC Waste Model**

The IPCC Waste Model is a free Microsoft (MS) Excel™–based model available at the IPCC Web site. First, go to the Web site <http://www.ipcc-nggip.iges.or.jp/public/2006gl/vol5.html>, then select “IPCC Waste Model (MS Excel)” under Chapter 3: Solid Waste Disposal. The model parameters (see **Tables 2-1 and 2-2**) are entered in the “Parameters” tab. For either the bulk waste option or the bulk MSW option, select the “bulk waste data only” option from the drop-down near Cell D11. Use the industrial waste row to enter the construction and demolition waste parameters. You do not need to enter inert values, as long as you also do not enter any inert waste quantities, but the sewage sludge row can be used for these if desired. Waste quantities are entered in the “Amount\_Deposited” tab. Although the IPCC model requests waste disposal quantities be entered in units of gigagrams (Gg, = 1,000 Mg) and reports CH<sub>4</sub> generation in Gg, if the waste quantities are entered in units of Mg, then the output will be in Mg of CH<sub>4</sub> generated. A conversion from Mg to short tons is necessary when using these model outputs, where one Mg is equivalent to 1.1 short tons.

### **Tips for Using LandGEM**

LandGEM is a free MS Excel™–based model available from EPA at <http://www.epa.gov/ttn/catc/products.html#software>. If a security warning banner appears when opening LandGEM, you will have to enable the Macros and ActiveX controls by selecting “Options” within this banner, then selecting “Enable this content.” All of the parameters are input under the “User Inputs” tab. Although drop-down selections are provided, you will often need to select “user-specified” and enter the values in the box provided. If you have the macros turned off, you will need to select the cell above the drop-down menu, and then use the arrow keys to move down one row and enter the number in that cell. Even though the value may be hidden by the drop-down menu, this value will be used in the calculations. The generation results for both CH<sub>4</sub> and CO<sub>2</sub> are provided in the “Results” tab. In order to obtain emissions results in short tons, you can select the “short tons/year” from the drop-down selection for “User-specified Unit” in Cell H6 in the “Results” tab.

Note that LandGEM uses the CH<sub>4</sub> generation potential,  $L_0$ , rather than DOC as the input parameter.  $L_0$  can be calculated from the DOC using Equation 2-2; this calculation assumes that the default values for MCF, DOC<sub>F</sub> and F apply.

$$L_0 = 493 \times DOC \quad (2-2)$$

where:

$$L_0 = \text{CH}_4 \text{ generation potential (m}^3 \text{ CH}_4\text{/Mg waste) [AP-42 nomenclature]}$$

$$DOC = \text{Degradable organic carbon [fraction (Mg C in waste/Mg waste)].}$$

Note also that LandGEM calculates only CH<sub>4</sub> and CO<sub>2</sub> generation without accounting for soil oxidation. It is generally assumed that 10% of the CH<sub>4</sub> generated is oxidized to CO<sub>2</sub> near the surface of the landfill (U.S. EPA, 2010a), so that CH<sub>4</sub> emissions (with no gas collection) are 90% of CH<sub>4</sub> generation.

### Sample Calculation for CH<sub>4</sub> Generation at Landfills

**Problem:** A food processing plant disposes of 10,000 Mg of waste a year in an on-site landfill. The landfill is in a moderate climate, has been accepting waste since 1983, and has no gas collection system. What are the CH<sub>4</sub> emissions from the landfill in 2010?

**Solution:** The following inputs are given:

$$S = 1983$$

$$T = 2010$$

$$W_x = 10,000 \text{ Mg for each year from 1983 through 2010}$$

From Table 2-1, we have

$$\text{DOC} = 0.22 \text{ (Industrial waste landfill, food processing industry)}$$

$$k = 0.12 \text{ yr}^{-1} \text{ (Industrial waste landfill, food processing industry, moderate climate)}$$

Use Equation 2-2 to convert DOC to L<sub>0</sub> for use in LandGEM:

$$L_0 = 493 \times 0.22 = 108.5 \text{ m}^3 \text{ CH}_4/\text{Mg waste}$$

Select the “User Inputs” tab. Enter “1983” in Cell D5; enter “2010” or larger number in Cell D6; enter 0.12 for k and 108.5 for L<sub>0</sub>. The selection of the concentration of non-methane organic compounds (NMOC concentration) will not affect the CH<sub>4</sub> or CO<sub>2</sub> calculations; use the default value for CH<sub>4</sub> content, F, of 50%. Make sure the drop down box at Cell K4 indicates waste quantities in Mg/yr, then enter 10,000 in Cells K8 through K35 (the latter should indicate year 2010). Use the default reporting profile under the section “Selected Gases/Pollutants” (this will provide output for both CH<sub>4</sub> and CO<sub>2</sub>). Select the “Results” tab. CH<sub>4</sub> generation, A, for 2010 is reported in Cell I-36 (using the default pollutant reporting profile).

$$A = 700 \text{ Mg CH}_4 \text{ in 2010}$$

It is assumed that 10% of the CH<sub>4</sub> generated will oxidize near the landfill surface, so the CH<sub>4</sub> emissions would be  $700 \times (1 - 0.1) = 630 \text{ Mg CH}_4/\text{yr}$  for 2010.

Converting the CH<sub>4</sub> emissions (GWP = 21) to CO<sub>2e</sub>:

$$\text{CH}_4 \text{ emissions are } 630 \times 21 = 13,230 \text{ Mg CO}_{2e}/\text{yr}$$

Converting to short tons:

$$\text{CH}_4 \text{ emissions are } 13,230 \text{ Mg CO}_{2e}/\text{yr} \times 1.1 \text{ t/Mg} = 14,553 \text{ tpy CO}_{2e} = 14,600 \text{ tpy CO}_{2e} \text{ rounded to three significant figures.}$$

## 2.1.2 CO<sub>2</sub> Emissions for Landfills without Gas Collection Systems

For landfills without gas collection systems, CO<sub>2</sub> emissions can be calculated from the CH<sub>4</sub> generation as follows:

$$B = A \times \left( \frac{1-F}{F} + OX \right) \times \frac{44}{16} \quad (2-3)$$

where:

$$B = \text{CO}_2 \text{ emissions (Mg/yr)}$$

$$A = \text{CH}_4 \text{ generation from Equation 2-1 (Mg CH}_4/\text{yr)}$$

$$F = \text{Fraction by volume of CH}_4 \text{ in landfill gas, generally assumed to be 0.5}$$

- $OX$  = Soil oxidation fraction, typically 0.1 (fraction)  
 44 = Molecular weight of  $CO_2$  (kg/kg-mol)  
 16 = Molecular weight of  $CH_4$  (kg/kg-mol).

### Sample Calculation for $CO_2$ Emissions for Landfills without Gas Collection Systems

**Problem:** For the food processing landfill in the previous example, what are the  $CO_2$  emissions from the landfill in 2010?

**Solution:** From the previous example,  $A = 700$  Mg  $CH_4$ /yr and  $F = 0.5$ . Using Equation 2-3 and rounding to three significant figures:

$$B = 700 \times \left( \frac{1 - 0.5}{0.5} + 0.1 \right) \times \frac{44}{16} = 2,120 \text{ Mg } CO_2/\text{yr}$$

Note that LandGEM reports the  $CO_2$  generation as 1,920 Mg/yr (see Cell L 36 in the "Results" tab after entering the data as in the previous example). The solution from Equation 2-3 is 10% greater due to the inclusion of the soil oxidation factor.

The total GHG emissions from the landfill are calculated as the sum of the  $CO_2$  emissions and the  $CH_4$  emissions (converted to  $CO_{2e}$ ). From the previous example, the  $CH_4$  emissions expressed as  $CO_{2e}$  are 13,230 Mg  $CO_{2e}$ /yr (retain additional significant figure for intermediate calculations).

The total GHG emissions from the landfill are:  $2,120 + 13,230 = 15,350$  Mg  $CO_{2e}$ /yr

Converting to short tons and rounding to three significant figures, the total GHG emissions from the landfill are:

$$15,350 \text{ Mg } CO_{2e}/\text{yr} \times 1.1 \text{ t/Mg} = 16,885 \text{ tpy } CO_{2e} = 16,900 \text{ tpy } CO_{2e}$$

### 2.1.3 $CO_2$ Emissions for Landfills with Gas Collection Systems

For landfills with gas collection system, a portion of the generated landfill gas will be collected and combusted in a flare, turbine, boiler, or similar destruction device. Nearly all of the  $CH_4$  collected and diverted to the destruction device will be converted to  $CO_2$ . Some fraction of the landfill gas will avoid capture, and some fraction of the  $CH_4$  in the uncollected landfill gas will be oxidized in the aerobic surface soil layer. Emissions from systems with landfill gas collection systems can be estimated several ways. Direct volumetric and composition measurements can be used to determine the total quantities of  $CH_4$  and  $CO_2$  contained in the recovered landfill gas. The quantities of  $CH_4$  and  $CO_2$  released from uncollected landfill gas can then be back-calculated based on an assumed landfill gas collection system efficiency or by a comparison of the quantity of  $CH_4$  recovered and the modeled  $CH_4$  generation quantity. When landfill gas recovery measurements are not available, the modeled  $CH_4$  generation quantity must be used in conjunction with an assumed landfill gas collection efficiency.

#### Step 1. Measurement (or Estimate) of Recovered $CH_4$ or $CO_2$

The quantity of a compound recovered, in Mg, is calculated as follows (adapted from Equation HH-4 or 40 CFR Part 98, subpart HH):

$$R_i = \sum_{n=1}^N \left\{ V_n \times \left( \frac{(Conc_i)_n}{100\%} \right) \times \frac{MW_i}{836.6} \times \left( \frac{520}{T_n} \right) \times P_n \times 0.001 \right\} \quad (2-4)$$

where:

$$R_i = \text{Quantity of compound } i \text{ recovered (Mg/yr)}$$

- $N$  = Number of measurement periods during the year  
 $V_n$  = Volume of recovered gas during measurement period  $n$  (acf, dry basis)  
 $(Conc_i)_n$  = Concentration of compound  $i$  during measurement period  $n$  (vol%, dry basis)  
 $MW_i$  = Molecular weight of compound  $i$  (kg/kg-mol)  
     = 16 kg/kg-mol for  $CH_4$   
     = 44 kg/kg-mol for  $CO_2$   
 836.6 = Molar volume correction factor at standard conditions of 60 °F (520 °R) and 1 atmosphere (scf/kg-mol)  
 $T_n$  = Temperature of recovered gas during measurement period  $n$  (°R)  
 $P_n$  = Pressure of recovered gas during measurement period  $n$  (atm)  
 0.001 = Conversion factor for kg to Mg (Mg/kg).

Typically,  $CH_4$  concentrations are monitored (and thus, measured values are available), but  $CO_2$  concentrations are not. If  $CO_2$  concentrations are not measured, the concentration of  $CO_2$  in the recovered gas (in vol%) can be conservatively calculated as:

$$Conc_{CO_2} = 100\% - Conc_{CH_4} \text{ (in vol\%)}$$

This approach assumes minimal infiltration air. If the  $N_2$  and/or  $O_2$  concentrations in the recovered landfill gas are known, the concentrations can be adjusted for infiltration air so that the calculated  $CO_2$  concentrations will not be overestimated due to air infiltration as:

$$Conc_{CO_2} = 100\% - Conc_{CH_4} \text{ (in vol\%) } - Conc_{N_2} \text{ (in vol\%) } - Conc_{O_2} \text{ (in vol\%)}$$

If only volumetric measurement data are available,  $CH_4$  and  $CO_2$  concentrations can be assumed to be 50%. Again, this assumes minimal infiltration air. If the  $N_2$  and/or  $O_2$  concentrations in the recovered landfill gas are known, first subtract the  $N_2$  and/or  $O_2$  concentrations from 100%, then assume the remaining percentage is half  $CH_4$  and half  $CO_2$  so that the calculated  $CH_4$  and  $CO_2$  recovery quantities will not be overestimated due to air infiltration.

If no measurements are conducted on the recovered landfill gas, the average gas collection efficiency can be estimated using the default gas collection efficiencies provided in **Table 2-3**. The average gas collection efficiency can then be used to estimate the quantity of  $CH_4$  and  $CO_2$  recovered by the collection system.  $CH_4$  and  $CO_2$  recovery are calculated from  $CH_4$  generation as follows:

$$R_{CH_4} = A \times CE \quad (2-5)$$

$$R_{CO_2} = A \times CE \times \left( \frac{44}{16} \right) \quad (2-6)$$

where:

- $R_{CH_4}$  = Quantity of  $CH_4$  recovered (Mg  $CH_4$  /yr)  
 $R_{CO_2}$  = Quantity of  $CO_2$  recovered (Mg  $CO_2$  /yr)  
 $A$  =  $CH_4$  generation from Equation 2-1 (Mg  $CH_4$ /yr)  
 $CE$  = Collection efficiency (fraction)  
 44 = Molecular weight of  $CO_2$  (kg/kg-mol)  
 16 = Molecular weight of  $CH_4$  (kg/kg-mol).



**Table 2-3. Default Landfill Gas Collection Efficiencies<sup>a</sup>**

Description	Landfill Gas Collection Efficiency
A1: Area with no waste in-place	Not applicable; do not use this area in the calculation
A2: Area without active gas collection, regardless of cover type.	CE2: 0%
A3: Area with daily soil cover and active gas collection	CE3: 60%
A4: Area with an intermediate soil cover, or a final sold cover not meeting the criteria for A5 below, and active gas collection	CE4: 75%
A5: Area with a final soil cover of 3 feet or thicker of clay and/or geomembrane cover system and active gas collection	CE5: 95%
<b>Area weighted average collection efficiency for landfills.</b>	$CE_{ave1} = (A2*CE2 + A3*CE3 + A4*CE4 + A5*CE5)/(A2+A3+A4+A5)$

<sup>a</sup>Source: 40 CFR part 98 subpart HH, Table HH-3.

### Step 2. Estimate of CO<sub>2</sub> Emissions from Recovery System and Destruction Device

All of the recovered CO<sub>2</sub> will be emitted as CO<sub>2</sub>; most of the recovered CH<sub>4</sub> will be converted and emitted as CO<sub>2</sub>. The AP-42 methodology (U.S. EPA 1998, 2008) simply assumes all of the recovered CH<sub>4</sub> is converted to CO<sub>2</sub>. However, a small portion of the recovered CH<sub>4</sub> will not be converted to CO<sub>2</sub>, either due to incomplete combustion of the CH<sub>4</sub> (i.e., the destruction efficiency of the unit) or due to bypassing or otherwise not operating the combustion device. Assuming the overall destruction efficiency accounts for time when the control system is inoperable or bypassed (i.e., if a turbine has a 95% destruction efficiency, but only operated 95% of the time, the overall destruction efficiency of the unit would be 90% [0.95×0.95]). Thus, in some cases, the destruction efficiency may differ significantly from 100%. Accounting for the destruction efficiency of the combustion device, the CO<sub>2</sub> emissions from the recovery system are:

$$X = R_{CO_2} + \left( R_{CH_4} \times DE \times \frac{44}{16} \right) \quad (2-7)$$

where:

- $X$  = CO<sub>2</sub> emissions from recovery (Mg CO<sub>2</sub>/yr)
- $R_{CH_4}$  = Quantity of CH<sub>4</sub> recovered (Mg CH<sub>4</sub>/yr)
- $R_{CO_2}$  = Quantity of CO<sub>2</sub> recovered (Mg CO<sub>2</sub>/yr)
- $DE$  = Destruction efficiency (fraction)
- 44 = Molecular weight of CO<sub>2</sub> (kg/kg-mol)
- 16 = Molecular weight of CH<sub>4</sub> (kg/kg-mol).

### Step 3. Estimate of CO<sub>2</sub> Emissions from Unrecovered Landfill Gas

A portion of the uncollected CH<sub>4</sub> is expected to oxidize as it permeates through the soil near the surface of the landfill. When measurement data are not available on the gas collection system, then the CH<sub>4</sub> recovery will be based on the CH<sub>4</sub> generation and assumed collection efficiency. The quantity of unrecovered landfill gas is directly calculated based on the assumed collection efficiency. The CO<sub>2</sub> emissions from the unrecovered landfill gas must account for both the CO<sub>2</sub> in the generated landfill gas that was not captured and the CO<sub>2</sub> generated as a result of uncaptured CH<sub>4</sub> oxidation. Equation 2-8 provides a means to calculate the CO<sub>2</sub> emissions from the apparent or assumed landfill gas collection efficiency:

$$Y = CO_2 \text{ unrecovered (Mg/yr)} = \frac{(1 - CE)}{CE} \times R_{CO_2} + \left[ OX \times \frac{(1 - CE)}{CE} \times R_{CH_4} \right] \times \frac{44}{16} \quad (2-8)$$

where:

- $Y$  = Quantity of CO<sub>2</sub> unrecovered (Mg CO<sub>2</sub> /yr)
- $CE$  = Collection efficiency (fraction)
- $R_{CO_2}$  = Quantity of CO<sub>2</sub> recovered (Mg CO<sub>2</sub> /yr)
- $R_{CH_4}$  = Quantity of CH<sub>4</sub> recovered (Mg CH<sub>4</sub> /yr)
- $OX$  = Soil oxidation fraction, typically 0.1 (fraction)
- 44 = Molecular weight of CO<sub>2</sub> (kg/kg-mol)
- 16 = Molecular weight of CH<sub>4</sub> (kg/kg-mol).

In some cases, the measured CH<sub>4</sub> recovery will not agree well with the modeled CH<sub>4</sub> generation. The ratio of measured CH<sub>4</sub> recovery to modeled CH<sub>4</sub> generation is the apparent landfill gas collection efficiency. If the apparent landfill gas collection efficiency exceeds 95% or 100%, this indicates that the modeling assumptions are incorrect. While the decay rate constant may be the culprit, generally measured CH<sub>4</sub> recovery exceeding modeled CH<sub>4</sub> generation is caused by too low a value for L<sub>0</sub> (or DOC). Site-specific values of L<sub>0</sub> (or DOC) can vary by a factor of 2 or more. In this case, either the model parameters should be adjusted to better correlate with the measured CH<sub>4</sub> recovery, or the CH<sub>4</sub> generation should be back-calculated from the CH<sub>4</sub> recovery.

### Sample Calculation for the Measurement or Estimation of Recovered CO<sub>2</sub> and CH<sub>4</sub>

**Problem:** A landfill with a gas collection system collects 30 million ft<sup>3</sup> (actual, wet basis) of landfill gas measured at a temperature of 70°F and a pressure of 0.5 psig (pounds per square inch, gauge). The moisture content of the landfill gas is assumed to be 5 vol%. The landfill gas has a CH<sub>4</sub> content of 55 vol%, dry basis. The landfill gas is combusted in a flare with a 98% design efficiency. The modeled CH<sub>4</sub> generation, A, has been calculated to be 500 Mg/yr. What is the apparent capture efficiency of the landfill gas collection system? What are the annual CO<sub>2e</sub> emissions?

**Solution:** The reported inputs need to be converted to the appropriate units for use in Equation 2-4 as follows:

$$\begin{aligned}
 V_n &= 30,000,000 \times (1 - 0.05 \text{ [H}_2\text{O content]}) = 28,500,000 \text{ actual ft}^3, \text{ dry basis} \\
 \text{Conc}_{\text{CH}_4} &= 55 \text{ vol\%, dry basis} \\
 \text{Conc}_{\text{CO}_2} &= 1 - 55\% = 1 - 0.55 = 0.45 = 45 \text{ vol\%, dry basis} \\
 \text{MW}_{\text{CH}_4} &= 16 \text{ kg/kg-mol for CH}_4 \\
 \text{MW}_{\text{CO}_2} &= 44 \text{ kg/kg-mol for CO}_2 \\
 836.6 &= \text{molar volume correction factor at } 60^\circ\text{F (520 }^\circ\text{R) and 1 atmosphere} \\
 T &= 70^\circ\text{F} + 460 = 530^\circ\text{R;} \\
 P &= (14.7 + 0.5)/14.7 = 1.034 \text{ atm}
 \end{aligned}$$

Entering these values into Equation 2-4 yields:

$$\begin{aligned}
 R_{\text{CO}_2} &= \sum_{n=1}^N \left\{ 28,500,000 \times \left( \frac{45\%}{100\%} \right) \times \frac{44}{836.6} \times \left( \frac{520}{530} \right) \times \left( \frac{1.034}{1} \right) \times 0.001 \right\} = 684 \text{ Mg CO}_2/\text{yr} \\
 R_{\text{CH}_4} &= \sum_{n=1}^N \left\{ 28,500,000 \times \left( \frac{55\%}{100\%} \right) \times \frac{16}{836.6} \times \left( \frac{520}{530} \right) \times \left( \frac{1.034}{1} \right) \times 0.001 \right\} = 304 \text{ Mg CH}_4/\text{yr}
 \end{aligned}$$

The apparent gas collection system efficiency is thus  $304/500 = 60.8\%$ .

There are two sources of CO<sub>2</sub> emissions: 1) emissions from the flare, and 2) emissions of uncollected gas from the surface of the landfill. Equation 2-7 is used to calculate the CO<sub>2</sub> emissions from the flare:

$$X = R_{\text{CO}_2} + \left( R_{\text{CH}_4} \times DE \times \frac{44}{16} \right) = 684 + \left( 304 \times 0.98 \times \frac{44}{16} \right) = 1,503 \text{ Mg CO}_2/\text{yr}$$

Equation 2-8 is used to calculate the CO<sub>2</sub> emissions from the landfill surface:

$$Y = \frac{(1 - 0.608)}{0.608} \times 684 + \left[ 0.1 \times \frac{(1 - 0.608)}{0.608} \times 304 \right] \times \frac{44}{16} = 441 + 53.9 = 496 \text{ Mg CO}_2/\text{yr}$$

There also are two sources of CH<sub>4</sub> emissions: 1) uncombusted CH<sub>4</sub> emissions from the flare, and 2) emissions of uncollected gas from the surface of the landfill. The CH<sub>4</sub> emissions can be calculated using either Equations HH-6 or HH-8 of 40 CFR part 98 subpart HH. Assuming the collection and destruction system operated continuously ( $f_{\text{REC}} = f_{\text{Dest}} = 1$ ),

$$\text{CH}_4 \text{ Emissions} = (A - R_{\text{CH}_4}) \times (1 - OX) + R_{\text{CH}_4} \times (1 - DE) = (500 - 304) \times 0.9 + 304 \times 0.02$$

$$\text{CH}_4 \text{ Emissions} = 182 \text{ Mg CH}_4/\text{yr}$$

Expressing the CH<sub>4</sub> emissions as CO<sub>2e</sub> = 182 Mg CH<sub>4</sub>/yr x 21 GWP = 3,822 Mg CO<sub>2e</sub>

The total GHG emissions from this landfill are the sum of the CO<sub>2</sub> emissions from the flare, the CO<sub>2</sub> emissions from the surface and the CH<sub>4</sub> emissions from the flare and surface. Therefore, the total GHG emissions from this landfill (rounded to three significant figures) are:

$$1,503 + 496 + 3,822 = 5,820 \text{ Mg CO}_2e/\text{yr}.$$

Converting to short tons and rounding to three significant figures, the total GHG emissions from the landfill are:

$$5,820 \text{ Mg CO}_2e/\text{yr} \times 1.1 \text{ t/Mg} = 6,400 \text{ tpy CO}_2e$$

## 2.2 Composting Operations

Composting is a specific waste management process by which organic waste is aerobically converted to a stabilized solid product called compost, which can then be used a fertilizer or soil amendment. There are three common methods of composting:

- **Windrow composting**—waste material is placed in rows of long piles called "windrows" and aerated by turning the pile periodically by either manual or mechanical means.
- **Aerated static pile composting**—waste materials are placed in a single waste pile with layers of loosely piled bulking agents (e.g., wood chips, shredded newspaper) so that air can pass from the bottom to the top of the pile. The piles also can be placed over a network of pipes that deliver air into or draw air out of the pile.
- **In-vessel composting**—organic materials are fed into a drum, silo, or similar equipment where the environmental conditions (including temperature, moisture, and aeration) are closely controlled. The apparatus usually has a mechanism to turn or agitate the material for proper aeration.

Composting facilities manage waste on a short-term basis (compared to landfills), so there is no need to track the quantity of waste managed over historic years. Additionally, while a small fraction of carbon in the waste may be converted to CH<sub>4</sub> in anaerobic sections within composting piles when there is excessive moisture or inadequate aeration (or mixing), most of the generated CH<sub>4</sub> is oxidized in the aerobic sections of the compost. As such, most of the carbon degraded within the compost pile will be converted to CO<sub>2</sub>. Generally, there will be a reduction in both the mass and carbon content of material in the compost pile.

One approach to determining CO<sub>2</sub> emissions from composting is to perform a careful carbon balance, considering carbon content and initial mass of raw waste materials and bulking materials added to the compost pile and a total mass and carbon content of the final compost. Typically, these data are not measured or available at most composting facilities. Volatile solids content can be used as a proxy for carbon content, but careful mass and volatile solids measurements would be required for all waste material, bulking agents, and final compost. These measurements are needed on a dry basis, so that changes in moisture content would not affect the results. In a study by Das et al. (1998), composting achieved approximately a 15% dry solids mass reduction and a 10% reduction in volatile solids content (of the dry solids) from the initial solids content. Therefore, composting achieved a 23.5% reduction in the initial mass of volatile solids (1 – 0.85×0.9). Based on data from Barlaz (1998), Das et al. (1998), and Zhang et al. (2007), the average ratio of carbon content to volatile solids content in waste materials (including bulking agents) is 0.53 (see U.S. EPA, 2010b for additional information on the derivation of this value). Using this carbon to volatile solids ratio and the mass reductions measured by Das et al. (1998), we estimate that 12% (23.5% × 0.53) of the total dry weight of solids added to a compost pile is carbon that is degraded during the composting process. Accounting for molecular weight of CO<sub>2</sub>, these data suggest that an appropriate CO<sub>2</sub> emission factor for composting operations is 0.44 kg/kg dry solids (12% × 44/12). Therefore, when more direct mass balance measurements are not available, the annual CO<sub>2</sub> emissions from composting facility can be estimated as:

$$E_{CO_2} = EF_{compost} \times \sum_{n=1}^N (M_{compost,n} \times TS_n) \quad (2-9)$$

where:

$$\begin{aligned} E_{CO_2} &= \text{CO}_2 \text{ emissions (Mg CO}_2\text{/yr)} \\ EF_{compost} &= \text{CO}_2 \text{ emission factor for composted material (kg CO}_2\text{/kg dry solids)} \\ &= 0.44 \text{ kg CO}_2\text{/kg dry solids} \\ n &= \text{Index for the waste material or bulking agent} \end{aligned}$$

- $N$  = Total number of different waste materials added to the compost pile or process  
 $M_{compost,n}$  = Annual mass of material  $n$  added or fed to the compost process (Mg/yr, wet basis)  
 $TS_n$  = Total solids content of material  $n$  when added or fed to the compost process (kg dry solids/kg wet solids).

CH<sub>4</sub> and N<sub>2</sub>O emissions from composting may be calculated using the total mass of waste composted and the emission factors provided in **Table 2-4**. Note that the emission factors for CH<sub>4</sub> and N<sub>2</sub>O are provided on a wet basis, so the emissions are calculated directly from the mass of material composted on a wet basis as:

$$E_{CH_4} = EF_{compost,CH_4} \times M_{compost} \quad (2-10)$$

$$E_{N_2O} = EF_{compost,N_2O} \times M_{compost} \quad (2-11)$$

where:

- $E_{CH_4}$  = CH<sub>4</sub> emissions (Mg CH<sub>4</sub>/yr)  
 $E_{N_2O}$  = N<sub>2</sub>O emissions (Mg N<sub>2</sub>O/yr)  
 $EF_{compost,CH_4}$  = CH<sub>4</sub> emission factor for composted material (kg CH<sub>4</sub>/kg wet waste)  
 = 0.004 kg CH<sub>4</sub>/kg wet waste (see **Table 2-4**)  
 $EF_{compost,N_2O}$  = N<sub>2</sub>O emission factor for composted material (kg N<sub>2</sub>O/kg wet waste)  
 = 0.0003 kg N<sub>2</sub>O/kg wet waste (see **Table 2-4**)  
 $M_{compost}$  = Annual mass of material added or fed to the compost process (Mg/yr, wet basis).

**Table 2-4. Default Emission Factors for Composting**

Pollutant	Emission Factor	Source
CO <sub>2</sub>	0.44 kg CO <sub>2</sub> / kg dry solids treated	See text discussion
CH <sub>4</sub>	0.004 kg CH <sub>4</sub> / kg of waste treated (wet basis)	IPCC (2006)
N <sub>2</sub> O	0.0003 kg N <sub>2</sub> O / kg of waste treated (wet basis)	IPCC (2006)

#### Sample Calculation for the Estimation of CO<sub>2</sub> Emissions from Composting Operations

**Problem:** A composting facility accepts 5,800 Mg/yr of waste (on a wet basis) with a total solids content of 30 wt%. What are the CO<sub>2</sub>, CH<sub>4</sub>, and N<sub>2</sub>O emissions in 2010?

**Solution:** Use Equations 2-9 through 2-11 and the emission factors in **Table 2-4** to calculate the emissions (emissions are rounded to two significant figures):

$$CO_2 \text{ Emissions} = 0.44 \times 5,800 \times 0.3 = 770 \text{ Mg CO}_2/\text{yr}$$

$$CH_4 \text{ Emissions} = 0.004 \times 5,800 = 23 \text{ Mg CH}_4/\text{yr}$$

$$N_2O \text{ Emissions} = 0.0003 \times 5,800 = 1.7 \text{ Mg N}_2\text{O}/\text{yr}$$

Expressing the CH<sub>4</sub> and N<sub>2</sub>O emissions as CO<sub>2e</sub> using the global warming potentials from Table 1-1:

$$\text{Total GHG Emissions} = 770 + (23 \times 21) + (1.7 \times 310) = 1,800 \text{ Mg CO}_{2e}/\text{yr}$$

Converting to short tons:

$$\text{Total GHG Emissions} = 1,800 \times 1.1 = 2,000 \text{ tpy CO}_{2e}$$

### 2.3 Land Treatment Units

Land treatment units (also known as land application units) are large areas of land where waste is applied or incorporated with the soil near the surface of the land (tilling depth of 6 to 12 inches). The soil is commonly re-tilled at fixed intervals to help aerate and further mix the waste/soil layer. Unlike composting, a land treatment unit is used for the final disposal of the waste material. Land treatment units are often used for the disposal of biosolids and petroleum sludge. Carbon in the applied wastes is converted to CO<sub>2</sub> and new biomass. Assuming a constant biomass population (dying and decaying biomass equaling new biomass growth), the CO<sub>2</sub> generation rate from the land treatment unit will be directly proportional to the carbon application rate to the land treatment unit:

$$E_{CO_2} = M_w \times TS_w \times CC_w \times \frac{44}{12} \quad (2-12)$$

where:

$E_{CO_2}$  = Annual CO<sub>2</sub> emissions (Mg CO<sub>2</sub>/yr)

$M_w$  = Annual mass of waste applied to the land treatment unit (Mg/yr, wet basis);

$TS_w$  = Total solids content of waste material applied to the land treatment unit (kg dry solids/kg wet solids).

$CC_w$  = Carbon content of waste material applied to the land treatment unit (kg C/kg dry solids)

44 = Molecular weight of CO<sub>2</sub> (kg/kg-mol)

12 = Molecular weight of carbon (kg/kg-mol).

#### Sample Calculation for the Estimation of CO<sub>2</sub> Emissions from Land Treatment Units

**Problem:** A facility applies 500,000 Mg/yr of waste to a land treatment unit. The applied waste has a moisture content of 20 wt% and a carbon content of 40 wt% (dry basis). What are the annual CO<sub>2</sub> emissions from the land treatment unit?

**Solution:** First, calculate the solids content as 1 – moisture content = 0.80 kg/kg waste, then apply Equation 2-11, as follows:

$$CO_2 \text{ Emissions (Mg / yr)} = 500,000 \times 0.80 \times 0.40 \times \frac{44}{12} = 587,000 \text{ Mg/yr}$$

Converting to short tons:

$$CO_2 \text{ Emissions (tpy)} = 587,000 \times 1.1 = 646,000 \text{ tpy}$$

*[This page intentionally left blank]*

### 3. Wastewater Treatment

Wastewater treatment systems are designed to remove soluble organic matter, suspended solids, pathogenic organisms, and chemical contaminants in wastewaters before the water can be discharged into natural water systems. Wastewater treatment systems used to treat household wastewater and sewage are referred to as municipal wastewater treatment systems. Wastewater treatment systems used to treat wastewater generated at an industrial facility are referred to as industrial wastewater treatment systems. Both municipal and industrial wastewater treatment systems may include a variety of processes, ranging from primary treatment for solids removal to secondary biological treatment (e.g., activated sludge, lagoons) for organics reduction to tertiary treatment for nutrient removal, disinfection, and more discrete filtration. Biological treatment is an effective process for reducing, removing, or transforming organic constituents and nutrients typically found in wastewaters to an acceptable form or concentration prior to discharge or reuse. As such, biological treatment systems are widely used in the United States for both municipal and industrial wastewater treatment.

When considering CO<sub>2</sub> emissions from wastewater treatment systems, there are two primary classes of biological treatment units: aerobic treatment units and anaerobic treatment units. Some treatment units, such as facultative lagoons, may be a mixture of the two, with aerobic zones near the surface of the lagoon and anaerobic zones in the lower depths of the lagoon. Regardless of the type of biological treatment employed, the biochemical reactions are similar, with organic carbon compounds being oxidized to form new cells, CO<sub>2</sub> and/or CH<sub>4</sub>, and water. This section provides a basic introduction to some of the primary types of biological wastewater treatment systems (**Section 3.1**), a method of estimating CO<sub>2</sub> and CH<sub>4</sub> emissions from biological wastewater treatment systems (**Section 3.2**), and a method of estimating N<sub>2</sub>O emissions (**Section 3.3**).

#### 3.1 Biological Treatment Processes


##### 3.1.1 Aerobic Treatment Processes

The activated sludge treatment process is one of the most commonly used biological wastewater treatment processes at both municipal and industrial wastewater treatment plants. There are many variations of activated sludge biological wastewater treatment processes, but they generally consist of two linked units: an aeration tank and a secondary clarifier. Oxygen is introduced into the aeration tank, either by diffused, submerged aeration or by surface aerators, to maintain the health of the microorganisms and ensure adequate oxidation of the organic compounds. A relatively high concentration of aerobic bacteria (“biomass”) is maintained in the aeration tank by settling out the aerobic bacteria in the secondary clarifier and recycling the majority of the biomass back to the aeration tank (**Figure 3-1**). A small amount of biomass is removed from the system (or “wasted”) to maintain the health of the biomass and maintain the desired biomass concentration in the aeration tank. The material balance around the system is simplified by considering the activated sludge process to be the combination of these two process units. There is a single influent wastewater flow to the aeration tank, and two effluent flows: the clarifier overflow and the wasted sludge stream. Neglecting minor losses, the clarifier overflow (or effluent) flow rate is equal to the influent flow rate. The wasted sludge is typically sent to either an aerobic or anaerobic digester, in which the bacteria feed upon themselves to reduce the quantity of biomass that requires ultimate disposal.

Some biological treatment units maintain high biomass concentrations without the use of clarifiers by providing high surface areas for biomass to grow on. These attached-growth or fixed-film systems include trickling filters and rotating biological contactors. Some of the biomass produced will eventually die or otherwise “slough off” from the support material and become entrained in the effluent. If a secondary



clarifier is used, the quantity of sludge generated may be estimated by the clarifier underflow rate; in other systems, the quantity of excess biomass generated may not be readily monitored or easily estimated.

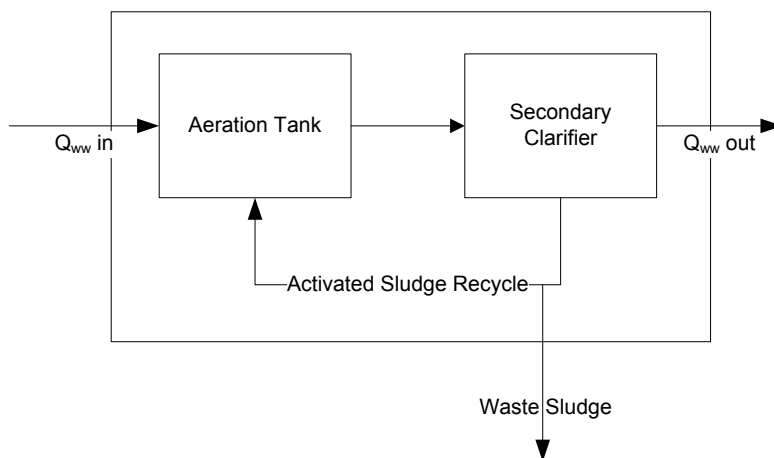

**Figure 3-1. Activated sludge wastewater treatment flow diagram.**

### 3.1.2 Anaerobic Treatment Processes

Certain microorganisms can metabolize organic material in the absence of oxygen (i.e., in anaerobic environments). Anaerobic bacteria tend to grow more slowly than aerobic bacteria, but they may degrade certain types of wastes more readily than aerobic bacteria. Anaerobic digestion occurs through a four-step process whereby acid- and  $\text{CH}_4$ -forming (methanogenic) bacteria convert organic matter into a biogas consisting of approximately 60–70%  $\text{CH}_4$ , 30–40%  $\text{CO}_2$ , and trace amounts of  $\text{N}_2$ , hydrogen ( $\text{H}_2$ ), hydrogen sulfide ( $\text{H}_2\text{S}$ ), and  $\text{O}_2$  [Columbia Boulevard Wastewater Treatment Plant (2006), Böning (2006), Krich et al. (2005)]. Anaerobic digesters at wastewater treatment plants are designed to optimize the growth of methanogenic bacteria. The organic matter contained in the wastewater is metabolized by the methanogenic bacteria and either incorporated into new biomass or converted to  $\text{CO}_2$  or  $\text{CH}_4$  under anaerobic conditions.


### 3.1.3 Facultative Treatment Processes

Lagoons are frequently used for the treatment of wastewaters with a high concentration of organic matter. Lagoons can be shallow or deep; they have long hydraulic retention times and operate similarly to a septic tank. Depending on the dimensions of the lagoon, the system may be almost entirely anaerobic (deep lagoons) or largely aerobic (shallow lagoons). In some applications, surface aerators may be used to enhance aerobic degradation. The bottom of the lagoon, where biomass generated within the lagoon accumulates, is almost always anaerobic. However,  $\text{CH}_4$  in the anaerobic biogas generated at the bottom of the lagoon may be oxidized as it travels upwards if there is a sufficiently large aerobic zone near the lagoon surface. Generally, there is no need for removal of the sludge deposited at the bottom; however, if the accumulation of sludge begins to significantly reduce the hydraulic retention time of water within the lagoon, the lagoon may be dredged to remove accumulated solids.

## 3.2 Estimating $\text{CH}_4$ and $\text{CO}_2$ Emissions

The degradable carbon content determines the  $\text{CH}_4$  and/or  $\text{CO}_2$  producing potential of a wastewater stream. A common measure of the amount of biologically degradable material in wastewater is the 5-day biochemical oxygen demand (BOD<sub>5</sub>) content. The BOD<sub>5</sub> determines the amount of dissolved oxygen

needed (i.e., oxygen demand) by aerobic biological organisms in a body of water to break down organic material present at a certain temperature (20 °C) over a specific period of time (5 days). The units of measure are commonly milligrams (mg) of oxygen demand per liter (L) of wastewater. BOD5 is a commonly monitored parameter for all types of biological wastewater treatment processes (both aerobic and anaerobic units) and used to determine the effectiveness of wastewater treatment processes. A simplified stoichiometric equation for the biochemical oxidation of organic constituents in wastewater is presented in **Figure 3-2**.



**Figure 3-2. Simplified stoichiometric equation for the biochemical oxidation of organic constituents in wastewater.**

For each mole of carbon in the organic material in the wastewater influent, one mole of oxygen is needed to convert it to CO<sub>2</sub>. While there will be additional oxygen required for converting other molecules contained within the organic material (primarily hydrogen), a reasonable maximum CO<sub>2</sub> generation rate per BOD5 would be 44 kg CO<sub>2</sub> per 32 kg BOD5. The BOD5 test is commonly performed using a series of dilutions to limit the change in biomass population over the test period, so that the BOD5 provides a reasonable measure of the total degradable organic carbon. Although some organic compounds may be more or less amenable to degradation under aerobic conditions versus anaerobic conditions, the BOD5 is commonly used to estimate the degradable organic carbon content for either type of treatment system. Depending on the population of microorganisms present in the test inoculum, the BOD5 test may also measure the oxygen required for nitrification (i.e., oxidation) of some or all of the ammonia present. This “nitrogenous” biochemical oxygen demand (BOD) is considered an interference to the carbonaceous BOD (cBOD) that is most useful in estimating the potential CO<sub>2</sub> or CH<sub>4</sub> emissions from the wastewater. Therefore, for waste streams with high nitrogen loadings or samples seeded with microorganisms from secondary treatment units, it may be necessary to add a chemical nitrification inhibitor, as allowed in the BOD5 test method, to determine cBOD and eliminate a potential bias caused by nitrogenous BOD.

Other parameters that may be monitored in the wastewater influent and correlated with the amount of degradable organic content include the chemical oxygen demand (COD) and total organic carbon (TOC). The COD test uses a chemical oxidizing agent to fully oxidize all influent waste constituents. As such, the COD is always larger than the BOD, and includes oxidation of chemicals that are not easily biodegradable. The unit of measure for COD is the same as that for BOD (i.e., mg oxygen demand/L of wastewater). The TOC test converts carbonaceous materials to CO<sub>2</sub> using high-temperature combustion, chemical oxidation, or ultraviolet oxidation, and then measures the CO<sub>2</sub> produced using a non-dispersive infrared analyzer. The units of measure are typically mg of carbon/L of wastewater. As with COD, TOC may oxidize constituents that are not readily biodegradable, so its use may overestimate the potential CO<sub>2</sub> emissions from biological wastewater treatment systems. On the other hand, TOC provides a more direct measure of the potential CO<sub>2</sub> emissions than BOD by providing a direct measure of carbon content, whereas oxygen demand may be attributed to other elements contained in the wastewater.

Many municipal and industrial wastewater treatment systems will have primary clarifiers or other treatment units that can remove organic matter (i.e., BOD5, COD, and/or TOC) from the wastewater without generating CO<sub>2</sub> or CH<sub>4</sub> emissions. Therefore, in wastewater treatment systems with physical or chemical treatment units upstream of the biological treatment unit, it is important to determine the organic content (either BOD5, COD, or TOC) at the influent of the biological treatment unit.

### 3.2.1 Estimating CH<sub>4</sub> and CO<sub>2</sub> Emissions from Wastewater and Sludge Treatment Units

Aerobic wastewater treatment systems produce primarily CO<sub>2</sub>, whereas anaerobic systems produce a mixture of CH<sub>4</sub> and CO<sub>2</sub>. Equations 3-1 and 3-2 provide a general means of estimating the CO<sub>2</sub> and CH<sub>4</sub> emissions directly from any type of wastewater treatment process assuming all organic carbon removed from the wastewater is converted to either CO<sub>2</sub>, CH<sub>4</sub>, or new biomass.

$$CO_2 = 10^{-6} \times Q_{WW} \times OD \times Eff_{OD} \times CF_{CO_2} \times [(1 - MCF_{WW} \times BG_{CH_4})(1 - \lambda)] \quad (3-1)$$

$$CH_4 = 10^{-6} \times Q_{WW} \times OD \times Eff_{OD} \times CF_{CH_4} \times [(MCF_{WW} \times BG_{CH_4})(1 - \lambda)] \quad (3-2)$$

where:

- $CO_2$  = CO<sub>2</sub> emission rate (Mg CO<sub>2</sub>/hr)
- $CH_4$  = CH<sub>4</sub> emission rate (Mg CH<sub>4</sub>/hr)
- $10^{-6}$  = Units conversion factor (Mg/g)
- $Q_{WW}$  = Wastewater influent flow rate (m<sup>3</sup>/hr)
- $OD$  = Oxygen demand of influent wastewater to the biological treatment unit determined as either BOD5 or COD (mg/L = g/m<sup>3</sup>)
- $Eff_{OD}$  = Oxygen demand removal efficiency of the biological treatment unit
- $CF_{CO_2}$  = Conversion factor for maximum CO<sub>2</sub> generation per unit of oxygen demand = 44/32 = 1.375 g CO<sub>2</sub>/ g oxygen demand
- $CF_{CH_4}$  = Conversion factor for maximum CH<sub>4</sub> generation per unit of oxygen demand = 16/32 = 0.5 g CH<sub>4</sub>/ g oxygen demand
- $MCF_{WW}$  = methane correction factor for wastewater treatment unit, indicating the fraction of the influent oxygen demand that is converted anaerobically in the wastewater treatment unit (see **Table 3-1**)
- $BG_{CH_4}$  = Fraction of carbon as CH<sub>4</sub> in generated biogas (default is 0.65)
- $\lambda$  = Biomass yield (g C converted to biomass/g C consumed in the wastewater treatment process).

The biomass yield,  $\lambda$ , in Equations 3-1 and 3-2 should be determined based on the net sludge generation from the process. For example, for an activated sludge tank, the sludge wastage rate would be used. Commonly, the mixed liquor volatile suspended solids (MLVSS) value is used as a measure of the biomass concentration. The flow rate of the sludge waste stream multiplied by the MLVSS concentration of the sludge waste stream provides a mass generation rate of biomass. Using the general cell composition from **Figure 3-2**, carbon accounts for 53% of the biomass weight (dry basis). The carbon consumed in the wastewater treatment process is estimated based on the BOD removal rate. Thus, the biomass yield,  $\lambda$ , can be calculated using Equation 3-3. When the biomass generation rate cannot be assessed, default values for the biomass yield provided in **Table 3-1** should be used.

$$\lambda = \frac{Q_S \times MLVSS_S \times CF_S}{Q_{WW} \times OD \times Eff_{OD} \times CF_C} \quad (3-3)$$

where:

- $\lambda$  = Biomass yield (g C converted to biomass/g C consumed in the wastewater treatment process)
- $Q_S$  = Waste sludge stream flow rate (m<sup>3</sup>/hr)
- $Q_{WW}$  = Wastewater influent flow rate (m<sup>3</sup>/hr)
- $MLVSS_S$  = Mixed liquor volatile suspended solids concentration of the waste sludge stream (mg/L = g/m<sup>3</sup>)

- $OD$  = Oxygen demand of influent wastewater to the biological treatment unit determined as either BOD5 or COD ( $\text{mg/L} = \text{g/m}^3$ )  
 $Eff_{OD}$  = Oxygen demand removal efficiency of the biological treatment unit  
 $CF_S$  = Correction factor for carbon content of the biomass (i.e., MLVSS<sub>S</sub>)  
 = 0.53 g C/g MLVSS (default)  
 $CF_C$  = Conversion factor for maximum C consumption per unit of oxygen demand  
 =  $12/32 = 0.375$  g C/ g oxygen demand.

**Table 3-1. Default Values for Methane Correction Factor and Biomass Yield**

Treatment System	MCF <sup>a</sup>	$\lambda$
<b>Wastewater Treatment Processes</b>		
Aerated treatment process (e.g., activated sludge system), well managed	0	0.65 <sup>b</sup>
Aerated treatment process, overloaded (anoxic areas)	0.3	0.45 <sup>b,c</sup>
Anaerobic treatment process (e.g., anaerobic reactor)	0.8	0.1 <sup>c,d</sup>
Facultative lagoon, shallow (< 2 m deep)	0.2	0
Facultative lagoon, deep ( $\geq 2$ m deep)	0.8	0
<b>Sludge Treatment Processes</b>		
Aerobic sludge digestion	0	Use $\lambda$ from wastewater treatment process
Anaerobic sludge digestion	0.8	

<sup>a</sup> Source: IPCC (2006).

<sup>b</sup> Source: Choubert et al. (2009), Muller et al. (2003), and Munz (2008);  $\lambda$  reported in g-COD in produced biomass/g-COD consumed; equivalent to  $\lambda$  in g-C in produced biomass/g-C consumed when using default  $CF_C$  in Equation 3-3.

<sup>c</sup> Source: Ammary (2004);  $\lambda$  reported in g-VSS produced/g-COD degraded; converted to  $\lambda$  in g-C in produced biomass/g-C consumed using default  $CF_S$  and  $CF_C$  in Equation 3-3 as  $\lambda = \lambda_{\text{reported}} \times (CF_S / CF_C)$ .

<sup>d</sup> Source: Low and Chase (1999);  $\lambda$  reported in g-VSS produced/g-COD degraded; converted to  $\lambda$  in g-C in produced biomass/g-C consumed using default  $CF_S$  and  $CF_C$  in Equation 3-3 as  $\lambda = \lambda_{\text{reported}} \times (CF_S / CF_C)$ .

If the sludge generated from the wastewater treatment unit is digested on-site, then there will be additional CO<sub>2</sub> and CH<sub>4</sub> emissions at the facility. Equations 3-4 and 3-5 provide a method for estimating the CO<sub>2</sub> and CH<sub>4</sub> emissions resulting from the digestion of biological solids generated in the wastewater treatment system. If the sludge is disposed of in a landfill or other solid waste disposal unit, the methods described in **Section 2** of this document should be used to estimate the CO<sub>2</sub> and CH<sub>4</sub> emissions resulting from the disposal of the biological solids.

$$CO_2 = 10^{-6} \times Q_s \times MLVSS \times CF_S \times (44/12) \times (1 - MCF_S \times BG_{CH_4}) \quad (3-4)$$

$$CH_4 = 10^{-6} \times Q_s \times MLVSS \times CF_S \times (16/12) \times (1 - MCF_S \times BG_{CH_4}) \quad (3-5)$$

where:

$CO_2$  = Emissions of CO<sub>2</sub> (Mg CO<sub>2</sub>/hr)

$CH_4$  = Emissions of CH<sub>4</sub> (Mg CH<sub>4</sub>/hr)

$10^{-6}$  = Units conversion factor (Mg/g)

$Q_s$  = Waste sludge stream flow rate (m<sup>3</sup>/hr)

$MLVSS$  = Mixed liquor volatile suspended solids concentration of the waste sludge stream (mg/L = g/m<sup>3</sup>)

$CF_S$  = Correction factor for carbon content of the biomass (i.e., MLVSS<sub>S</sub>)

- = 0.53 g C/g MLVSS (default)
- $MCF_S$  = methane correction factor for sludge digestion, indicating the fraction of the treated sludge that is converted anaerobically (see **Table 3-1**)
- $BG_{CH_4}$  = Fraction of carbon as  $CH_4$  in generated biogas (default is 0.65)

Equations 3-4 and 3-5 are applicable for all sludge digesters. For most sludge digesters, however, the only solids entering the unit are those generated in the wastewater treatment system. For these cases, Equation 3-3 can be used to express the sludge digester's emissions based on the feed to the wastewater treatment process, as follows:

$$CO_2 = 10^{-6} \times Q_{WW} \times OD \times Eff_{OD} \times CF_{CO_2} \times [\lambda(1 - MCF_S \times BG_{CH_4})] \quad (3-6)$$

$$CH_4 = 10^{-6} \times Q_{WW} \times OD \times Eff_{OD} \times CF_{CH_4} \times [\lambda(MCF_S \times BG_{CH_4})] \quad (3-7)$$

where:

- $CO_2$  = Emissions of  $CO_2$  (Mg  $CO_2$ /hr)
- $CH_4$  = Emissions of  $CH_4$  (Mg  $CH_4$ /hr)
- $10^{-6}$  = Units conversion factor (Mg/g)
- $Q_{WW}$  = Wastewater influent flow rate ( $m^3$ /hr)
- $OD$  = Oxygen demand of influent wastewater to the biological treatment unit determined as either BOD5 or COD (mg/L =  $g/m^3$ )
- $Eff_{OD}$  = Oxygen demand removal efficiency of the biological treatment unit
- $CF_{CO_2}$  = Conversion factor for maximum  $CO_2$  generation per unit of oxygen demand  
=  $44/32 = 1.375$  g  $CO_2$ / g oxygen demand
- $CF_{CH_4}$  = Conversion factor for maximum  $CH_4$  generation per unit of oxygen demand  
=  $16/32 = 0.5$  g  $CH_4$ / g oxygen demand
- $MCF_S$  = methane correction factor for sludge digester, indicating the fraction of the influent oxygen demand that is converted anaerobically in the digester (see **Table 3-1**)
- $BG_{CH_4}$  = Fraction of carbon as  $CH_4$  in generated biogas (default is 0.65)
- $\lambda$  = Biomass yield (g C to biomass/g C consumed in the wastewater treatment process).

While Equations 3-6 and 3-7 are applicable for most sludge digesters associated with a wastewater treatment system, there may be instances where Equations 3-4 and 3-5, which require direct measurement of sludge flow rate and solids content, are needed. Equations 3-4 and 3-5 must be used rather than Equations 3-6 and 3-7 for the following situations:

- The sludge digester is the only biological treatment process at the facility
- Additional waste streams are fed to the sludge digester
- Other physical/chemical treatment processes are conducted on the sludge prior to the digester that alter the mass of carbon entering the digester.

A similar set of equations to Equations 3-1 through 3-3, 3-6, and 3-7 can be written using TOC as the measure of influent contaminant concentration. When TOC is used, the TOC concentration should be expressed "as methane" so that it is a direct measure of carbon atoms. The TOC concentration (as methane) would replace the oxygen demand term (OD), and the efficiency term,  $Eff_{OD}$ , would be based on the removal efficiency of TOC across the wastewater treatment unit,  $Eff_{TOC}$ . Finally, each of the conversion factor (CF) terms would need to be adjusted as provided in **Table 3-2**.

**Table 3-2. Correction Factors for Equations 3-2 through 3-4 for Different Measurement Method**

Correction Factor Term	Correction Factor (CF) Value for Designated Measurement Method	
	BOD5 or COD	TOC (as methane)
CF <sub>CO2</sub>	1.375	3.667
CF <sub>CH4</sub>	0.5	1.333
CF <sub>S</sub>	0.53	0.53
CF <sub>C</sub>	0.375	1

Equations 3-4 and 3-5 are not dependent on the method used to monitor carbon content of the wastewater. The corresponding equations to Equations 3-1 through 3-3, 3-6, and 3-7 when using TOC are provided below.

$$CO_2 = 10^{-6} \times Q_{WW} \times TOC \times Eff_{TOC} \times CF_{CO_2} \times [(1 - MCF_{WW} \times BG_{CH_4})(1 - \lambda)] \quad (3-1a)$$

$$CH_4 = 10^{-6} \times Q_{WW} \times TOC \times Eff_{TOC} \times CF_{CH_4} \times [(MCF_{WW} \times BG_{CH_4})(1 - \lambda)] \quad (3-2a)$$

$$\lambda = \frac{Q_S \times MLVSS_S \times CF_S}{Q_{WW} \times TOC \times Eff_{TOC} \times CF_C} \quad (3-3a)$$

$$CO_2 = 10^{-6} \times Q_{WW} \times TOC \times Eff_{TOC} \times CF_{CO_2} \times [\lambda(1 - MCF_S \times BG_{CH_4})] \quad (3-6a)$$

$$CH_4 = 10^{-6} \times Q_{WW} \times TOC \times Eff_{TOC} \times CF_{CH_4} \times [\lambda(MCF_S \times BG_{CH_4})] \quad (3-7a)$$

where:

$CO_2$  = Emissions of CO<sub>2</sub> (Mg CO<sub>2</sub>/hr)

$CH_4$  = Emissions of CH<sub>4</sub> (Mg CH<sub>4</sub>/hr)

$10^{-6}$  = Units conversion factor (Mg/g)

$Q_{WW}$  = Wastewater influent flow rate (m<sup>3</sup>/hr)

$TOC$  = Total organic carbon content of influent wastewater to the biological treatment unit (mg/L = g/m<sup>3</sup>, measured as methane)

$Eff_{TOC}$  = TOC removal efficiency of the biological treatment unit

$CF_{CO_2}$  = Conversion factor for maximum CO<sub>2</sub> generation per unit of TOC consumed  
= 44/12 = 3.667 g CO<sub>2</sub>/g TOC

$CF_{CH_4}$  = Conversion factor for maximum CH<sub>4</sub> generation per unit of TOC consumed  
= 16/12 = 1.333 g CH<sub>4</sub>/g TOC

$MCF_{WW}$  = methane correction factor for wastewater treatment unit, indicating the fraction of the influent TOC that is converted anaerobically in the wastewater treatment unit (see **Table 3-1**)

$BG_{CH_4}$  = Fraction of carbon as CH<sub>4</sub> in generated biogas (default is 0.65)

$\lambda$  = Biomass yield (g C converted to biomass/g C consumed in the wastewater treatment process).

$Q_S$  = Waste sludge stream flow rate (m<sup>3</sup>/hr)

$MLVSS$  = Mixed liquor volatile suspended solids concentration of the waste sludge stream (mg/L = g/m<sup>3</sup>)

$CF_S$  = Correction factor for carbon content of the biomass (i.e., MLVSS<sub>S</sub>)

- = 0.53 g C/g MLVSS (default)
- $CF_C$  = Conversion factor for maximum C consumption per unit of TOC consumed
  - = 12/12 = 1.0 g C/g TOC
- $MCF_S$  = methane correction factor for sludge digester, indicating the fraction of the influent TOC that is converted anaerobically in the digester (see **Table 3-1**)

If measurement data are available on a daily or hourly basis, the emissions for each hour or day can be calculated and all the values for the year summed to calculate the annual emissions, and the largest short-term emissions rate can be used to calculate or estimate the worst-case hourly emissions rate. When these measurement data are not available, typical or average flow rates and concentrations should be used along with the annual operating hours to calculate the annual average emissions. To estimate the hourly emission rate when frequent measurement data are not available, the maximum anticipated flow rate (or wastewater treatment system capacity) and highest anticipated organic load (as BOD, COD, or TOC) to the system should be used.

### Sample Calculations for Estimating CH<sub>4</sub> and CO<sub>2</sub> Emissions from Wastewater Treatment Systems

**Problem:** A wastewater treatment system employs an aerated active sludge unit and an anaerobic digester to reduce the quantity of sludge requiring disposal. The activated sludge unit has an average flow rate of 1 million gallons per day and an inlet BOD<sub>5</sub> of 500 mg/L(=g/m<sup>3</sup>). The unit achieves a 95% BOD<sub>5</sub> reduction. What are the CO<sub>2</sub> and CH<sub>4</sub> emissions from this wastewater treatment system?

**Solution:** The activated sludge system is assumed to be well-managed due to the high BOD<sub>5</sub> reduction efficiency. For a well-managed activated sludge system, the following defaults are taken from Tables 3-1 and 3-2.

$$\begin{aligned} \text{MCF}_{\text{WW}} &= 0 \\ \lambda &= 0.65 \\ \text{CF}_{\text{CO}_2} &= 1.375 \\ \text{CF}_{\text{CH}_4} &= 0.5 \end{aligned}$$

There are 264.2 gallons per m<sup>3</sup>, therefore:

$$Q_{\text{WW}} = 10^6 \text{ gal/day} \times (1 \text{ m}^3/264.2 \text{ gal}) \times (1 \text{ day}/24 \text{ hr}) = 157.7 \text{ m}^3/\text{hr}$$

Equation 3-2 is used to calculate the CO<sub>2</sub> emissions as follows:

$$\text{CO}_2 = 10^{-6} \times 157.7 \text{ m}^3/\text{hr} \times 500 \text{ g/m}^3 \times 0.95 \times 1.375 \times [(1 - 0)(1 - 0.65)]$$

$$\text{CO}_2 = 0.036 \text{ Mg CO}_2/\text{hr}$$

Assuming the activated sludge system is operated continuously (8,760 hrs/yr), the annual CO<sub>2</sub> emissions from this process unit are 0.036×8,760 = 316 Mg CO<sub>2</sub>/yr.

Converting to short tons, the annual CO<sub>2</sub> emissions from this process unit are:

$$316 \text{ Mg CO}_2/\text{yr} \times 1.1 \text{ t/Mg} = 347.6 \text{ tpy CO}_2$$

[Since MCF<sub>WW</sub> = 0, no CH<sub>4</sub> is generated from the treatment process (Equation 3-2 is zero when MCF<sub>WW</sub> = 0)]

For the anaerobic sludge digester, the following defaults are taken from Tables 3-1 and 3-2.

$$\begin{aligned} \text{MCF}_S &= 0.8 \\ \lambda &= 0.65 \\ \text{CF}_{\text{CO}_2} &= 1.375 \\ \text{CF}_{\text{CH}_4} &= 0.5 \end{aligned}$$

The default value for CH<sub>4</sub> concentration in the digester gas is used (BG<sub>CH<sub>4</sub></sub> = 0.65), and Equations 3-6 and 3-7 can be used as follows:

$$\text{CO}_2 = 10^{-6} \times 157.7 \text{ m}^3/\text{hr} \times 500 \text{ g/m}^3 \times 0.95 \times 1.375 \times [0.65(1 - (0.8 \times 0.65))] = 0.032 \text{ Mg CO}_2/\text{hr}$$

$$\text{CH}_4 = 10^{-6} \times 157.7 \text{ m}^3/\text{hr} \times 500 \text{ g/m}^3 \times 0.95 \times 0.5 \times [0.65(0.8 \times 0.65)] = 0.0127 \text{ Mg CH}_4/\text{hr}$$

Using the global warming potential for CH<sub>4</sub> of 21:

$$\text{CH}_4 \text{ emissions} = 0.0127 \times 21 = 0.267 \text{ Mg CO}_{2e}/\text{hr.}$$

Therefore, the total GHG emissions from the digester are: 0.032 + 0.267 = 0.299 Mg CO<sub>2e</sub>/hr.

With 8,760 operating hours a year, the annual GHG emissions from the digester are:

$$0.299 \times 8760 = 2,620 \text{ Mg CO}_{2e}/\text{yr}$$

Converting to short tons, the annual CO<sub>2</sub> emissions from this process unit are:

$$2,620 \text{ Mg CO}_{2e}/\text{yr} \times 1.1 \text{ t/Mg} = 2,882 \text{ tpy CO}_2$$

The total GHG emissions from the wastewater treatment system are the sum of the emissions from the wastewater treatment process and the sludge digester:

$$347.7 + 2,882 = 3,230 \text{ tpy CO}_{2e}$$




### 3.2.2 Estimating CH<sub>4</sub> and CO<sub>2</sub> Emissions from Combustion of Biogas

If the CH<sub>4</sub> generated by anaerobic wastewater treatment process or anaerobic sludge digestion process is captured and combusted (in a flare or other combustion device), then there will be a conversion of CH<sub>4</sub> to CO<sub>2</sub> in the biogas combustion unit. The methods for calculating the CO<sub>2</sub> and CH<sub>4</sub> emissions based on measurement of the volume and CH<sub>4</sub> concentration of the biogas are presented in **Section 2.1.3** of this document.


### 3.3 Estimating N<sub>2</sub>O Emissions

Wastewater treatment plants may also be a source of N<sub>2</sub>O emissions. The amount of nitrogen present in the influent wastewater will determine the N<sub>2</sub>O generation potential. The treatment process (whether aerobic, anaerobic, or a combination of aerobic and anaerobic) will also affect the magnitude of the N<sub>2</sub>O emissions. During aerobic treatment, ammonia (NH<sub>3</sub><sup>+</sup>) or organic nitrogen is biologically oxidized to nitrites (NO<sub>2</sub><sup>-</sup>) and nitrates (NO<sub>3</sub><sup>-</sup>) by autotrophic bacteria through a process called nitrification. NO<sub>2</sub><sup>-</sup> and NO<sub>3</sub><sup>-</sup> can then be converted to nitrogen gas (N<sub>2</sub>) under anoxic conditions (i.e., where dissolved oxygen is absent) by heterotrophic bacteria through a process called denitrification. N<sub>2</sub>O is a byproduct of the nitrification process and an intermediate product of the denitrification process. **Figure 3-3** presents simplified reaction pathways and illustrates the formation of N<sub>2</sub>O during the nitrification and denitrification processes.

#### Nitrification



#### Denitrification



**Figure 3-3. Simplified reaction mechanisms for nitrification and denitrification N<sub>2</sub>O formation.**

The amount of nitrogen in the wastewater influent is the principal factor in determining the extent of the N<sub>2</sub>O generation potential in wastewater treatment plants (WWTPs). Two commonly monitored parameters include Total Kjeldahl Nitrogen (TKN) and Total Nitrogen (TN). TKN is the sum of organic nitrogen and free ammonia (NH<sub>4</sub><sup>+</sup> and NH<sub>3</sub>) in the waste or wastewater, whereas TN is the sum of TKN plus NO<sub>3</sub><sup>-</sup> and NO<sub>2</sub><sup>-</sup>. The TKN method is not an in-line or automated method, and consequently results in lengthy time requirements and high temperatures compared to the TN method. However, the TN method is not an approved EPA method, so TKN is the parameter of choice in many wastewater treatment systems. TKN is also frequently used in a variety of applications including food, beverages, grain, wastewater, drinking water, and soils to determine nitrogen content.

Limited data have been collected regarding quantified N<sub>2</sub>O generation from wastewater treatment. The U.S. EPA (2010a) and IPCC (2006) use single emission factors based on a limited data set that factor in protein intake and population but do not take into account different treatment process conditions and configurations, and spatial and diurnal variability in N<sub>2</sub>O emissions. In an effort to build upon the limited data set, a recently released interim report presents the results of a large-scale study on 12 different WWTP activated sludge process configurations, both with and without biological nutrient removal, across the United States (Chandran, 2010). Biological nutrient removal systems are designed and operated to achieve nutrient removal (both nitrogen and phosphorus) through the use of specific microorganisms. The goal of this effort was to determine N<sub>2</sub>O fluxes of several WWTPs. The final report with detailed results is due out in 2012. To be consistent with the methodology used in national inventories, Chandran (2010)

also developed N<sub>2</sub>O emission factors in units consistent with the EPA and IPCC methodologies (i.e., g N<sub>2</sub>O/population equivalent/year), where one population equivalent is equal to 100 gallons of wastewater discharged per capita.

Plants in the Northeast and Midwest were tested twice, once during the warm months and once during colder months. Those plants included in the study on the West Coast were also sampled twice but not subjected to significant temperature changes. Sampling occurred at multiple locations of the activated sludge train in each WWTP, including aerobic, anoxic, and anaerobic zones, depending upon the specific facility configuration. The results showed that N<sub>2</sub>O emissions were higher in aerated zones than in non-aerated zones, conflicting with the long-held belief that N<sub>2</sub>O emissions from WWTPs mostly occur in anoxic zones. They attributed higher N<sub>2</sub>O emissions in aerated zones to (1) increased air-stripping of N<sub>2</sub>O, (2) N<sub>2</sub>O production due to oxygen inhibited heterotrophic denitrification, or (3) N<sub>2</sub>O production by autotrophic nitrification during changes in aeration (Chandran, 2010).

Chandran (2010) recommends estimating emissions as a fraction of influent TKN load or influent TKN load processed as a more appropriate method in lieu of using a single lumped emission factor or flow normalized emission factor to describe N<sub>2</sub>O emissions. Lumped emission factors or flow normalized factors do not take into account diurnal or spatial variations in N<sub>2</sub>O emissions from wastewater treatment.

Equation 3-8 presents a methodology to estimate N<sub>2</sub>O emissions for both aerobic and anaerobic processes using an average value for the percent of influent TKN emitted as N<sub>2</sub>O from Chandran (2010):

$$N_2O_{WWTP} = Q_i \times TKN_i \times EF_{N_2O} \times \frac{44}{28} \times 10^{-6} \quad (3-8)$$

where:

- $N_2O_{WWTP}$  = N<sub>2</sub>O emissions generated from WWTP process (Mg N<sub>2</sub>O/hr)
- $Q_i$  = Wastewater influent flow rate (m<sup>3</sup>/hr)
- $TKN_i$  = Amount of TKN in the influent (mg/L = g/m<sup>3</sup>)
- $EF_{N_2O}$  = N<sub>2</sub>O emission factor (g N emitted as N<sub>2</sub>O per g TKN in influent),  
= 0.0050 g N emitted as N<sub>2</sub>O/g TKN (Chandran, 2010)
- 44/28 = Molecular weight conversion, g N<sub>2</sub>O per g N emitted as N<sub>2</sub>O
- 10<sup>-6</sup> = Units conversion factor (Mg/g).

### Sample Calculations for Estimating N<sub>2</sub>O Emissions from a Wastewater Treatment Plant

**Problem:** An anaerobic wastewater treatment plant has an influent flow rate of 97 m<sup>3</sup>/hr and an influent TKN load of 56 Mg/L. What are the total annual N<sub>2</sub>O emissions from this wastewater treatment system?

**Solution:** The following inputs are used in Equation 3-8:

$$\begin{aligned} Q_i &= 97 \text{ m}^3/\text{hr} \\ \text{TKN}_i &= 56 \text{ Mg/L} = 56 \text{ g/m}^3 \\ \text{EF}_{\text{N}_2\text{O}} &= 0.0050 \text{ g N emitted as N}_2\text{O/g TKN} \end{aligned}$$

$$N_2O_{\text{WWTP}} = 97 \times 56 \times 0.0050 \times \frac{44}{28} \times 8,760 \times 10^{-6} = 0.374 \text{ Mg N}_2\text{O/yr}$$

Using the global warming potential for N<sub>2</sub>O of 310, the annual N<sub>2</sub>O emissions expressed as CO<sub>2e</sub> from wastewater treatment are:

$$0.374 \text{ Mg N}_2\text{O/yr} \times 310 = 116 \text{ Mg CO}_{2e}/\text{yr}$$

Converting to short tons and rounding to two significant digits, the annual emissions are:

$$116 \text{ Mg CO}_{2e}/\text{yr} \times 1.1 \text{ t/Mg} = 130 \text{ tpy CO}_{2e}$$

## 4. Ethanol Fermentation

The production of ethanol involves the conversion of a carbon-based feedstock through the fermentation process to create ethanol. Feedstocks for ethanol production can include sugar-based materials, such as sugarcane; starch-based materials, such as corn; or cellulosic-based materials, such as wood chips. Prior to fermentation, the starches and cellulose contained within a feedstock must be accessed through mechanical (milling) processes and converted to sugars through chemical processes. During fermentation, which typically is conducted using batch reactors, the sugars are broken down to create ethanol, and concurrently, CO<sub>2</sub> is formed as a byproduct.


Preparation of a starch-based feedstock, such as corn, or a sugar-based feedstock, such as sugarcane, is accomplished via one of two production processes: wet milling or dry milling. In the dry-milling process, the corn kernels or other starchy grains are first ground into flour before processing. Byproducts created are distillers grain with solubles, which may be sold as livestock feed, and CO<sub>2</sub>, which is released during fermentation and may be sold for use in food processing and bottling. In wet-mill production, the corn is steeped in water and dilute sulfuric acid before processing. Wet mills often produce other co-products such as starches, corn syrups, feeds, and oils.

Cellulosic ethanol refers to ethanol produced from lignocellulosic biomass materials, primarily those from agricultural and forestry wastes. Feedstocks can include materials such as corn stover, switchgrass, and wood chips. The production of ethanol from lignocellulosic materials is more complex than the process used for starch and sugar-based feedstocks, because lignocellulosic materials consist of cellulose, hemicellulose, and lignin. Cellulose molecules consist of glucose molecules that are encapsulated by lignin. Lignin provides structural integrity to the plant and is a residual from the fermentation process that can be burned to produce electricity. Hemicellulose is made up of both five- and six-carbon sugars, where the composition of these sugars varies among plants.

While there are some variations in the chemistry based on the feedstock used, the methods for estimating emissions from these sources are similar and a common methodology can be applied based on the available data. **Section 4.1** provides a stoichiometry-based method for estimating CO<sub>2</sub> emissions from sugar- and starch-based ethanol fermentation, and **Section 4.2** provides a stoichiometry-based method for estimating CO<sub>2</sub> emissions from cellulosic ethanol fermentation. Due to the batch nature of the process and the fluctuations in the CO<sub>2</sub> emissions over time, special considerations are needed regarding measurement data. **Section 4.3** describes these issues and presents a method for determining CO<sub>2</sub> emissions from ethanol production processes from direct CO<sub>2</sub> measurement data. When measurement data are available, emissions should be estimated using the methodology in **Section 4.3**.

### 4.1 CO<sub>2</sub> Emissions from Sugar- and Starch-based Ethanol Fermentation

Sugar- and starch-based fermentation processes include a similar fermentation process in which yeast is added to convert glucose, a six-carbon sugar, to ethanol and CO<sub>2</sub>. One mole of glucose is converted into two moles of ethanol and two moles of CO<sub>2</sub> through the following chemical reaction:



Equation 4-1 provides a generalized stoichiometry-based equation for ethanol fermentation.

$$EF_{\text{fermentation}} = \rho_{\text{EtOH}} \times \frac{MW_{\text{CO}_2}}{MW_{\text{EtOH}}} \times \frac{X \text{ moles CO}_2}{Y \text{ moles EtOH}} \times \frac{3,785}{453.6} \quad (4-1)$$

where:

$$\begin{aligned}
 EF_{fermentation} &= \text{CO}_2 \text{ emission rate (lb CO}_2\text{/gal EtOH)} \\
 \rho_{EtOH} &= \text{Density of ethanol (g/cm}^3\text{)} = 0.789 \\
 MW_{CO_2} &= \text{Molecular weight of CO}_2 \text{ (g/mole)} = 44 \\
 MW_{EtOH} &= \text{Molecular weight of ethanol (g/mole)} = 46 \\
 X &= \text{Moles of CO}_2 \text{ produced per mole of sugar processed} \\
 Y &= \text{Moles of ethanol produced per mole of sugar processed} \\
 3,785 &= \text{Units conversion factor (cm}^3\text{/gal)} \\
 453.6 &= \text{Units conversion factor (g/lb)}.
 \end{aligned}$$

For sugar- and starch-based ethanol production, the ratio of X/Y is expected to be 1 (X=2 and Y=2). Note that this ratio is based on typical stoichiometric conversion, assuming that only ethanol and CO<sub>2</sub> are produced; it does not account for carbon that may have formed other pollutants, such as acetaldehyde or formaldehyde. Some yeast is less tolerant to heat and other conditions and may produce more off-products (such as acetaldehyde) and less ethanol, which may affect the X/Y ratio in either direction. If a ratio other than 1 is used, supporting documentation (e.g., measurement data as described in **Section 4.3** and/or ethanol yields consistent with the proposed or actual production rates at the facility) should be supplied to support the different molar conversion.

Using the default X/Y molar ratio of 1, Equation 4-1, simplifies to:

$$EF_{fermentation} = 0.789 \times \frac{44}{46} \times \frac{3,785}{453.6} = 6.29 \text{ lb CO}_2\text{/gallon EtOH} \quad (4-2)$$

The theoretical emission factor of 6.29 lb CO<sub>2</sub>/gal of ethanol produced is based on the assumption that the ethanol produced is 200 proof (i.e., 100% ethanol). If ethanol production is monitored based on the pure ethanol produced, then the annual CO<sub>2</sub> emissions in short tons are calculated as:

$$E_{CO_2} = V_{EtOH\ 200} \times EF_{fermentation} \times \frac{1}{2,000} \quad (4-3)$$

where:

$$\begin{aligned}
 E_{CO_2} &= \text{CO}_2 \text{ emissions (tpy CO}_2\text{)} \\
 V_{EtOH\ 200} &= \text{Volume of 200-proof ethanol produced (gal/yr)} \\
 EF_{fermentation} &= \text{CO}_2 \text{ emission rate ((lb CO}_2\text{/gal 200 proof EtOH produced)) from Equation 4-1;} \\
 &\quad \text{default is 6.29 based on X/Y ratio of 1} \\
 2,000 &= \text{Units conversion factor (lb/ton)}
 \end{aligned}$$

In the production of ethanol, a denaturant such as gasoline is added to the ethanol to create a product that is not suited for human consumption. Therefore, if the volume of ethanol produced is monitored based on the total volume of denatured ethanol produced, then a facility-specific denaturant content must be applied to determine the quantity of 100% pure ethanol produced at the facility:

$$V_{EtOH\ 200} = V_{EtOHden} \times \frac{100 - Den\%}{100} \quad (4-4)$$

where

$$\begin{aligned}
 V_{EtOH\ 200} &= \text{Volume of 200-proof ethanol produced (gal/yr)} \\
 V_{EtOHden} &= \text{Volume of denatured ethanol produced (gal/yr)} \\
 Den\% &= \text{Percent of denatured ethanol produced that is denaturant (vol\%).}
 \end{aligned}$$

Therefore, for facilities that monitor total production of denatured ethanol, the annual CO<sub>2</sub> emissions in short tons are calculated as:

$$E_{CO_2} = V_{EtOHden} \times \frac{100 - Den\%}{100} \times EF_{fermentation} \times \frac{1}{2,000} \quad (4-5)$$

- $E_{CO_2}$  = CO<sub>2</sub> emissions (tpy)  
 $V_{EtOHden}$  = Volume of denatured ethanol produced (gal/yr)  
 $Den\%$  = Percent of denatured ethanol produced that is denaturant (vol%), default = 2  
 $EF_{fermentation}$  = CO<sub>2</sub> emission rate (lb CO<sub>2</sub>/gal 200 proof EtOH produced) from Equation 4-1; default is 6.29 based on X/Y ratio of 1  
 2,000 = Units conversion factor (lb/ton).

In cases where the percent denaturant is not known, a default value of 2% may be used to provide a conservative estimate. This default value is based on various requirements on denaturant content created by various entities; the Iowa Department of Natural Resources (Iowa DNR) currently uses a value of 2.5% in their state reporting methodology (Iowa DNR, 2010) and provides the following discussion:

“According to the Renewable Fuels Association (RFA), requirements for denaturant content include:

- The Alcohol and Tobacco Tax and Trade Bureau (TTB) allows differing denaturant amounts depending on whether the ethanol plant is permitted as a distilled spirits or alcohol fuel plant;
- The American Society for Testing and Materials (ASTM) restricts the maximum amount to 5% per a letter they received from the TTB;
- The 2008 Food Conservation and Energy Act of 2008 restricts the full Volumetric Ethanol Excise Tax Credit (VEETC) amount to ethanol that has no more than 2% denaturant content; and
- The Internal Revenue Service’s (IRS) interpretation of the restriction on denaturant content and impact to tax credit eligibility has in essence moved the ethanol industry to no more than 2.49% denaturant content.

So today, the industry is restricted to 1.96% denaturant as a minimum to avoid liquor tax and 2.49% denaturant as a maximum for full VEETC.” (Iowa DNR, 2010)

**Sample Calculation for CO<sub>2</sub> Emissions at an Ethanol Production Facility with Corn Feedstock**

**Problem:** An ethanol production facility that uses corn as a feedstock produces 60,000,000 gallons of denatured ethanol in 2010. The facility uses a 2.20% denaturant. What are the CO<sub>2</sub> emissions in 2010 in tpy?

**Solution:** Using Equation 4-5:

$$\begin{aligned} V_{\text{EtOHden}} &= 60,000,000 \text{ gal} \\ \text{den}\% &= 2.2 \\ EF_{\text{fermentation}} &= 6.29 \text{ lb CO}_2/\text{gal EtOH} \end{aligned}$$

$$E_{\text{CO}_2} = 60,000,000 \times \frac{100 - 2.2}{100} \times 6.29 \times \frac{1}{2000} = 185,000 \text{ tpy CO}_2$$


The total CO<sub>2</sub> emissions for the fermentation process from this ethanol production facility in the year 2010 are 190,000 tpy CO<sub>2</sub> (rounded to two significant figures).

Many ethanol production facilities capture and sell the CO<sub>2</sub> produced from the ethanol fermentation process and may therefore not emit all of the CO<sub>2</sub> produced. Sources that capture and sell the CO<sub>2</sub> should have records of the quantity of CO<sub>2</sub> sold (i.e., shipped off-site); the quantity of CO<sub>2</sub> shipped off-site should be subtracted from the quantity of CO<sub>2</sub> generated to determine the net CO<sub>2</sub> emission at the facility. Subpart PP of the GHG Reporting Rule provides methods for determining the annual mass of CO<sub>2</sub> captured or exported based on quarterly CO<sub>2</sub> concentrations and either mass or volumetric flow rate measurements, or other weight measurements. These requirements can be found in 40 CFR 98 Subpart PP.


Short-term emissions cannot be easily estimated using the stoichiometry-based method due to uncertainty and variability in the batch process operation. A factor can be developed to estimate the maximum CO<sub>2</sub> emissions rate from the average CO<sub>2</sub> emissions over the batch cycle using measurement data (see **Section 4.3**). When CO<sub>2</sub> concentration data are not available, the ratio of the maximum flow rate to the average flow rate over a fermentation cycle can be used as a proxy for this factor.


#### 4.2 CO<sub>2</sub> Emissions from Cellulosic Ethanol Fermentation

Cellulosic fermentation is somewhat complicated by the fact that hemicellulose is made up of both five- and six-carbon sugars. The fermentation process for five-carbon sugars, represented by xylose, can follow several pathways in its conversion to ethanol and CO<sub>2</sub>. Typically, anaerobic fermentation is achieved through the following chemical reaction in which three moles of xylose are converted into five moles of ethanol and five moles of carbon dioxide:



However, the following chemical pathways also exist for the fermentation of xylose:





Cellulose content of the biomass is variable, ranging from 40% to 60% by weight; hemicellulose from 20% to 40% by weight; and lignin from 10% to 24% by weight (U.S. DOE, 2009). Fermentation efficiencies also can vary given different yeast strains and processing techniques. Although different stoichiometric conversion ratios of ethanol to CO<sub>2</sub> exist for xylose and different cellulosic feedstocks have different ratios of five- and six-carbon sugars, an equal molar quantity of ethanol and CO<sub>2</sub> is typically generated for cellulosic fermentation processes, suggesting the first chemical pathway where three moles of xylose are converted to five moles of ethanol, and five moles of CO<sub>2</sub> is the predominant reaction pathway.

The stoichiometry-based equation for ethanol fermentation presented in Equation 4-1 also applies to cellulosic ethanol fermentation. The default emission factor of 6.29 lb CO<sub>2</sub>/gal of 200 proof ethanol produced should be used unless data are available to support a different molar ratio. If a ratio other than 1 is used, supporting documentation (e.g., measurement data as described in **Section 4.3** and/or ethanol yields consistent with the proposed or actual production rates at the facility) should be supplied to support the different molar conversion.

In summary, the methods presented in **Section 4.1** are also applicable for cellulosic ethanol fermentation. The equation in **Section 4.1** should be used to calculate the quantity of CO<sub>2</sub> generated and emitted. As noted previously, sources that capture and sell the CO<sub>2</sub> should record the quantity of CO<sub>2</sub> sold; the quantity of CO<sub>2</sub> sold and shipped off-site should be subtracted from the quantity of CO<sub>2</sub> generated to determine the net CO<sub>2</sub> emission at the facility.

### 4.3 CO<sub>2</sub> Emissions from Direct Measurement Data

The complete fermentation of glucose in the feedstock into ethanol can generally take 40–50 hours (Renewable Fuels Association, 2010). During this timeframe, the rate of conversion to ethanol and the concurrent production of CO<sub>2</sub> vary depending on stage of fermentation and temperature. Consequently, to accurately measure the CO<sub>2</sub> emissions rate for fermentation, an emissions profile must be created using measurements throughout the fermentation process. For example, hourly samples using instrumental methods or continuous readings of CO<sub>2</sub> concentrations in conjunction with flow rates would be used to create such a profile. A single stack test or CO<sub>2</sub> measurement over a short period of time would not be expected to give an accurate indication of the CO<sub>2</sub> emissions for the entire fermentation cycle due to the fluctuations in gas generation rates and composition over the fermentation cycle. However, should a series of emissions tests be conducted over a complete fermentation cycle to determine the cumulative CO<sub>2</sub> emissions for the batch cycle, the results of this series of measurements can be used to determine the emissions from the fermentation cycle. When frequent or continuous direct measurement data are available, CO<sub>2</sub> emissions should be determined based on the measurement data as follows:

$$E_{CO_2} = \sum_{n=1}^N \{Q_n \times (\%CO_2)_n \times 0.001142 \times t_n\} \quad (4-1)$$

where:

- $E_{CO_2}$  = CO<sub>2</sub> emissions (lb/cycle)
- $N$  = Number of measurement periods during the cycle
- $Q_n$  = Flow rate of generated gas during measurement period  $n$  (dscf/min)
- $(\%CO_2)_n$  = Measured CO<sub>2</sub> percentage in exhaust stream during measurement period  $n$  (vol%, dry)



0.001142 = Units conversion factor for CO<sub>2</sub> (lb CO<sub>2</sub>/dscf per vol% CO<sub>2</sub>); uses 68°F and 1 atmosphere as standard conditions

$t_n$  = Time interval associated with measurement period  $n$  (min).

The emissions from each batch processed can be calculated using Equation 4-1, and these values can be summed to calculate the annual emissions from the ethanol production process. If measurement data are available for only one cycle, a site-specific emission factor (lb CO<sub>2</sub> emitted/ gal EtOH produced) can be developed for that cycle and used rather than the stoichiometry-based emission factor in Equation 4-1 or default emission factor from Equation 4-2. Individual measurement period data can also be evaluated to determine the maximum hourly emission rate during the fermentation cycle. This value can be used directly if the measurement is made during maximum ethanol production. Otherwise, the data can be used to develop a ratio of the maximum CO<sub>2</sub> emission rate to the average CO<sub>2</sub> emissions rate over the cycle. The maximum hourly rate can then be estimated based on the average CO<sub>2</sub> emissions (from Section 4.1) at maximum ethanol production rates.

## 5. References

- Ammary, B.Y. 2004. Nutrient requirements in biological industrial wastewater treatment. *African Journal of Biotechnology* 3(4):236–238.
- Barlaz, M.A. 1998. Carbon storage during biodegradation of municipal solid waste components in laboratory-scale landfills. *Global Biogeochemical Cycles* 12(2):373–380.
- Böning, Rainer. 2006. Presentation entitled: Producing and Using Digester Gas at a Wastewater Treatment Plant. December 5. Available at <http://www.erftverband.de/digester-gas.pdf>
- Chandran, K. 2010. *Greenhouse Nitrogen Emission from Wastewater Treatment Operations: Interim Report*. Water Environment Research Foundation (WERF), Report Number U4R07a.
- Choubert, J-M., A. Marquot, A-E. Stricker, Y. Racault, S. Gillot, and A. Héduit. 2009. Anoxic and aerobic values for the yield coefficient of the heterotrophic biomass: determination at full-scale plants and consequences on simulations. *Water SA* 35(1):103–109.
- Columbia Boulevard Wastewater Treatment Plant, Portland, OR. 2006. Presentation entitled: Energy Management Using Microturbine Technology. September. Available at [http://www.naseo.org/committees/energyproduction/documents/Energy\\_Management\\_Using\\_Microturbine\\_Technology.pdf](http://www.naseo.org/committees/energyproduction/documents/Energy_Management_Using_Microturbine_Technology.pdf)
- Das, K.C., E.W. Tollner, and T.G. Tornabene. 1998. Composting pulp and paper industry wastes: process design and product evaluation. In *Compost in the Southeast: Proceedings of the 1998 Conference*. Athens, GA. Pp. 129–123. Available at <http://www.p2pays.org/ref/12/11563.pdf>.
- Iowa DNR (Department of Natural Resources). 2010. *2009 Greenhouse Gas Emissions from Selected Iowa Source Categories*. August 31. Available at [http://www.iowadnr.gov/air/prof/ghg/files/2009\\_Greenhouse\\_Gas\\_Inventory.pdf](http://www.iowadnr.gov/air/prof/ghg/files/2009_Greenhouse_Gas_Inventory.pdf).
- IPCC (Intergovernmental Panel on Climate Change). 2006. *2006 IPCC Guidelines for National Greenhouse Gas Inventories, Volume 5. Waste*. Report and associated Excel® waste model are available at <http://www.ipcc-nggip.iges.or.jp/public/2006gl/vol5.html>.
- Krich, K.; Augenstein, D.; Batmale, JP; Rutledge, B.; Salour, D. 2005. *Biomethane from Dairy Waste: A Sourcebook for the Production and Use of Renewable Natural Gas in California: Chapter 2: Production of Biogas by Anaerobic Digestion*. July. Available at <http://www.suscon.org/cowpower/biomethaneSourcebook/biomethanesourcebook.php>
- Low, E.W., and H.A. Chase. 1999. Reducing production of excess biomass during wastewater treatment. *Water Research* 37(5):1119–1132.
- Muller, A., M.C. Wentzel, R.E. Loewenthal, and G.A. Ekama. 2003. Heterotroph anoxic yield in anoxic aerobic activated sludge systems treating municipal wastewater. *Water Research* 37(10):2435–2441.
- Munz, G., R. Gori, L. Cammil, and C. Lubello. 2008. Characterization of tannery wastewater and biomass in a membrane bioreactor using respirometric analysis. *Bioresource Technology* 99(19):8612–8618.

- Renewable Fuels Association. 2010. *How Ethanol is Made*. Web page: <http://www.ethanolrfa.org/pages/how-ethanol-is-made/> (accessed October 4, 2010).
- U.S. DOE (Department of Energy). 2009. *ABC's of Biofuels*, Office of Energy Efficiency and Renewable Energy Biomass Program. Web page: [http://www1.eere.energy.gov/biomass/abcs\\_biofuels.html](http://www1.eere.energy.gov/biomass/abcs_biofuels.html) (accessed October 4, 2010).
- U.S. EPA (Environmental Protection Agency). 1998. *Compilation of Air Pollutant Emission Factors. Supplement E of Volume 1: Stationary Point and Area Sources. Section 2.4: Municipal Solid Waste Landfills*. Office of Air Quality Planning and Standards, Research Triangle Park, NC.
- U.S. EPA (Environmental Protection Agency). 2005. *Landfill Gas Emissions Model (LandGEM) Version 3.02 User's Guide*. EPA-600/R-05/047. Office of Research and Development, Washington, DC. May. Report and associated Excel® model are available at <http://www.epa.gov/ttn/catc/products.html#software>.
- U.S. EPA (Environmental Protection Agency). 2008. *Background Information Document for Updating AP42 Section 2.4 for Estimating Emissions from Municipal Solid Waste Landfills*. EPA-600/R-08-116. Office of Research and Development, Washington, DC. September.
- U.S. EPA (Environmental Protection Agency). 2009. *Mandatory Greenhouse Gas Reporting Rule: EPA's Response to Public Comments*. Volume No. 36; Subpart HH – Landfills. Office of Atmospheric Programs, Washington, DC. September.
- U.S. EPA (Environmental Protection Agency). 2010a. *2010 U.S. Greenhouse Gas Inventory Report: Inventory of U.S. Greenhouse Gas Emissions and Sinks: 1990–2008*. EPA-430-R-10-006. Office of Atmospheric Programs, Washington, DC. April 15.
- U.S. EPA (Environmental Protection Agency). 2010b. *Technical Support Document for the Industrial Waste Landfill Sector: Final Rule for Mandatory Reporting of Greenhouse Gases*. Docket Item EPA-HQ-OAR-2008-0508-2310. Office of Atmospheric Programs, Washington, DC. June 9.
- Zhang, Y., H. Cui, R. Ozao, Y. Cao, B. Chen, C. Wang, and W. Pan. 2007. Characterization of activated carbon prepared from chicken waste and coal. *Energy & Fuels* 21(6):3735–3739.