

APPENDIX X

RF-2 EQUIPMENT DRAWINGS AND
SPECIFICATIONS

FOR

SIEMENS WATER TECHNOLOGIES CORP.

PARKER REACTIVATION FACILITY

PARKER, ARIZONA

Revision 0
February 2007




TABLE OF CONTENTS

<u>ITEM</u>	<u>DESCRIPTION</u>
Dwg. A-30280	Weigh Belt Feeder
Dwg. F-001	RF-2 Reactivation Furnace
Dwg. P-007	RF-2 Afterburner
Dwg. DJ95-539-1	Arrangement CGS Venturi Scrubber/Absorber
Dwg. DJ95-539-2	Specifications, Nozzle Schedule & Notes CGS Venturi Scrubber/Absorber
Dwg. DJ95-540-1	CGS Wet Electrostatic Precipitator
Dwg. C25923F1	Induced Draft Fan
Dwg. D95-75-S1-1	Dual Wall Stack & Details
Dwg. 1541-M-001	Stack Port Arrangement
	North American Model 6422 Burner Information
	North American Model 6514 Burner Information
Dwg. ASC303-03	CEMS Flow Diagram
Ametek	O ₂ Analyzer Specifications
	Thermox O ₂ Analyzer Specifications
	Siemens Ultramat 23 CO Analyzer Specifications
	TECO Model 48C CO Analyzer Specifications

DRAWING A-30280
WEIGH BELT FEEDER

Revision 0
February 2007

1. PROJECT NAME: [Blank]
 2. PROJECT NUMBER: [Blank]
 3. PROJECT LOCATION: [Blank]
 4. PROJECT DATE: [Blank]
 5. PROJECT STATUS: [Blank]

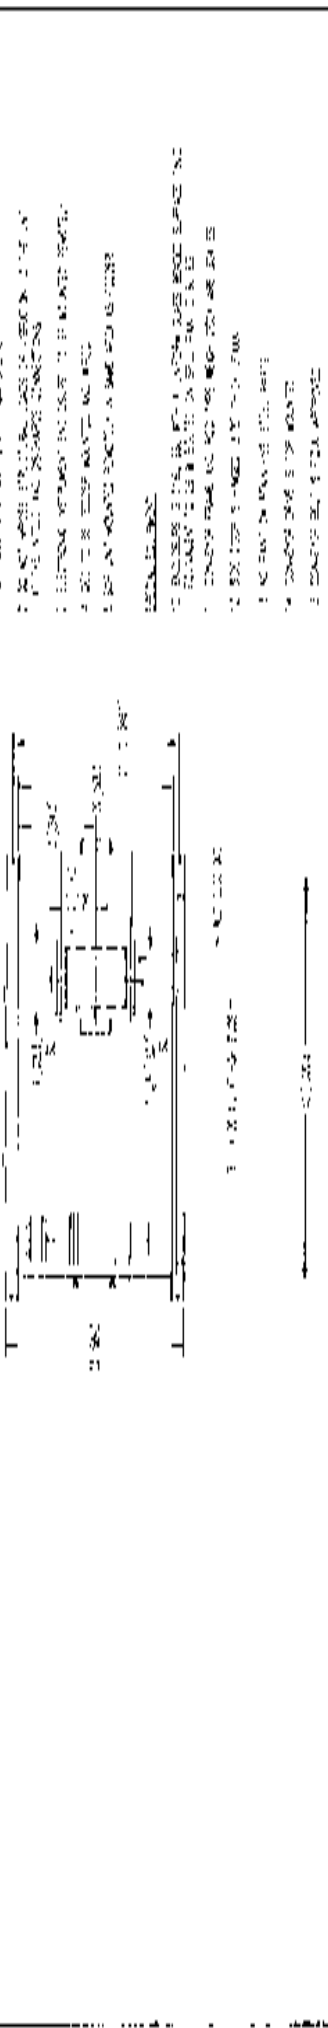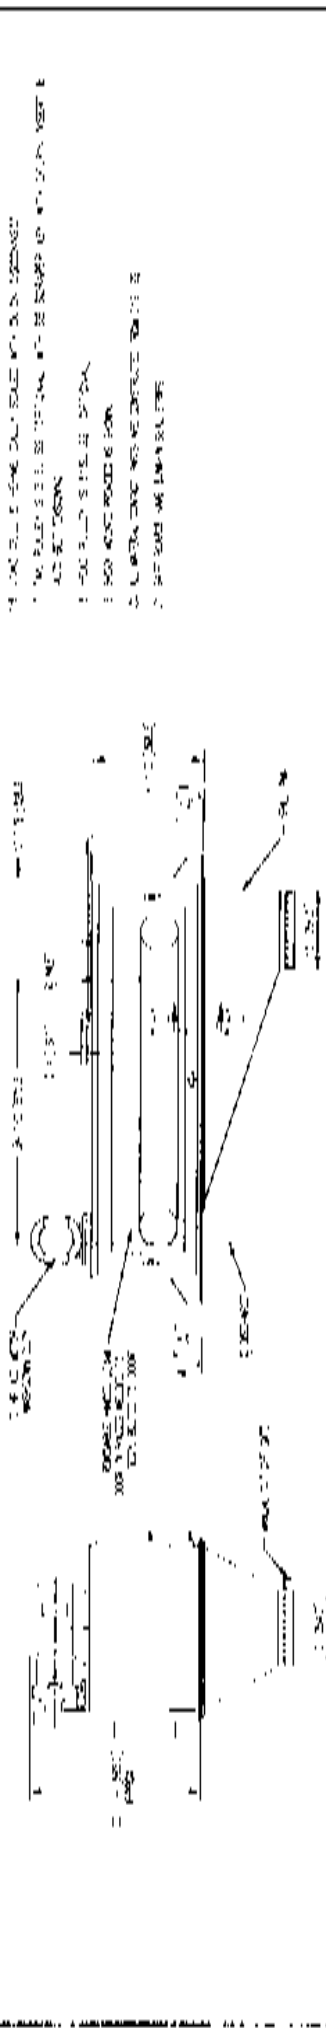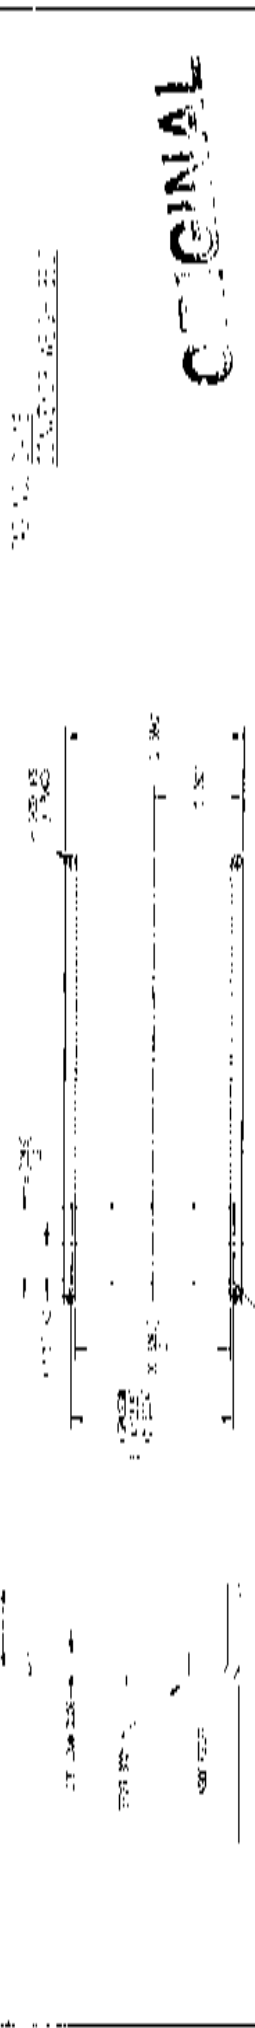


DRAWING F-001
RF-2 REACTIVATION FURNACE

Revision 0
February 2007

DRAWING P-007
RF-2 AFTERBURNER

Revision 0
February 2007

DATE	NO.	ISSUES / REVISIONS	BY	CHK	APP	APP
12/23/96	△	AND S&B TAP OUTLET TEST REV. SUPPORTS REF. ANCHORS TO 310 SS (WHERE S&B S&D)				
12/14/96	△	DELETED HOPPER, REV. BUT. SECT., MACHED HOPPER, BUT. SECT., MACHED HOPPER TEST "T-1" DET. "X" & NOTE IN SECT. 7-10	GRS	JAM	KJV	HM
11/8/96	△	ZERO ISSUE	GRS	JAM	KJV	HM



Hankin
Environmental Sys

THIS DRAWING IS THE PROPERTY OF HANKIN ENVIRONMENTAL SYSTEMS, INC. AND IS NOT TO BE REPRODUCED, COPIED, REPRODUCED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF HANKIN ENVIRONMENTAL SYSTEMS, INC. ANY UNAUTHORIZED REPRODUCTION OR TRANSMISSION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF HANKIN ENVIRONMENTAL SYSTEMS, INC. IS PROHIBITED BY LAW.

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER, RETRACTORY
SYSTEM

12-10 C.D. S. HEARTY
AFTERBURNER,

[illegible]

DRAWING DJ95-539-1 & 2
CGS VENTURI SCRUBBER/ABSORBER

Revision 0
February 2007




DRAWING DJ95-540-1
CGS WET ELECTROSTATIC PRECIPITATOR

Revision 0
February 2007

DRAWING C25923F1
INDUCED DRAFT FAN


Revision 0
February 2007

DIMENSIONS ARE BACK-TO-BACK OF ANGLES AND OUTSIDE OF PLATES WHERE APPLICABLE. BOLTS & GASKETS BY OTHERS

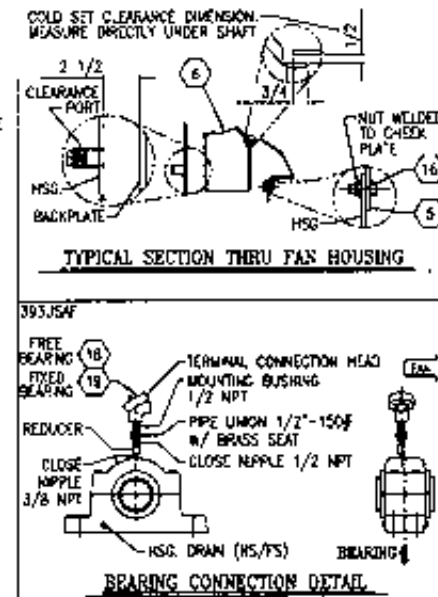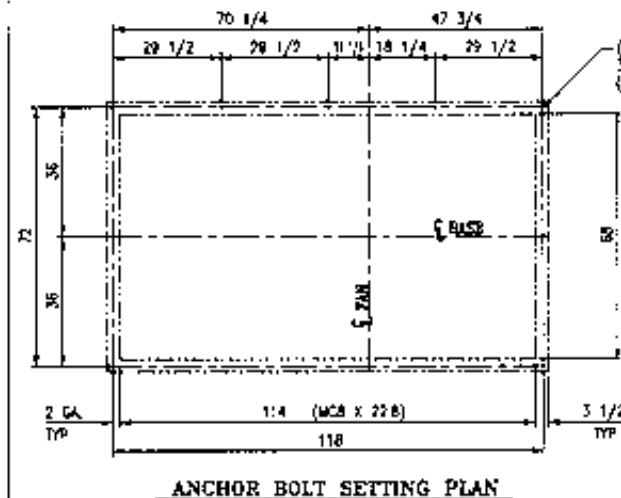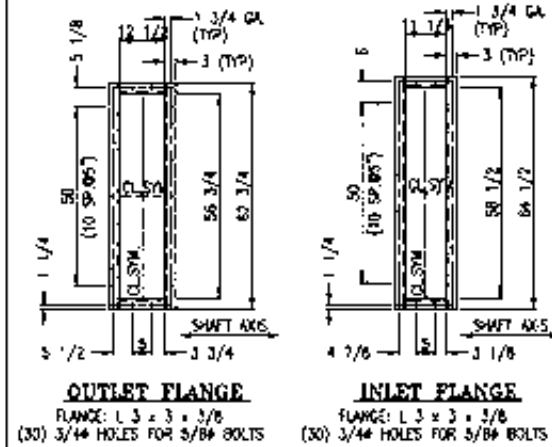

BEARING LUBRICATION REQUIREMENTS	
TYPE:	STATIC
GREASE:	MOBILITH SHC 220

QTY	PCS	SHOP	DESCRIPTION	
#	TO	ASSY		
#	ISSP	PCS		
1	1	1	FAN ASSEMBLY	
1	1	1	HOUSING BASE SECTION	3/8\"
2	1	1	IMPELLER REMOVAL SECTION	
3	1	1	DISCHARGE SECTION	
4			**** NOT USED ****	
5	1	1	INLET CONE	
6	1	1	IMPELLER: 852, R30A, 20X, SW, COW	66 1/4\"
7	1	1	PEDESTAL ASSEMBLY	A36
8	1	1	FIXED BRG SKF-SAF 225	3 15/16 DIA. SPHERICAL ROLLER
9	1	1	FREE BRG SKF-SAF 1500	2 15/16 DIA. DOUBLE ROW BALL
10	1	1	BEARING MOUNTING HARDWARE	A307 GRA
11	1	1	DRIVE COUPLING HO-SET PM12	(SEE NOTE #5)
12	1	1	COUPLING GUARD	A36
13	2	2	SHAFT SEAL ASSEMBLY	
14	1	1	GASKET 3/8 x 3	FIBERGLASS
15	1	1	ASSEMBLY HARDWARE (H-BOLT 5/8\"	316
16	1	1	INLET CONE ASSY HARDWARE	316
17	7	7	SPLICE BAR	317L
18	1	1	THERMOCOUPLE: PYCOT \"J\" SPRING-LOADED, SINGLE ELEMENT	
			w/ ENCLOSURE & MTC HARDWARE (P/N 02-3046-13-A, 4)	
19	1	1	THERMOCOUPLE: PYCOT \"J\" SPRING-LOADED, SINGLE ELEMENT	
			w/ ENCLOSURE & MTC HARDWARE (P/N 02-3046-13-A, 4)	
20	1	1	MOTOR: SIEMENS FRAME: 4AST TYPE: ROZESD	
			SHIP: 150 RPM: 1800 S.F.-1.0 HP 480V/3PH/60HZ	
21	1	1	MOTOR ASSEMBLY HARDWARE	A307 GRA

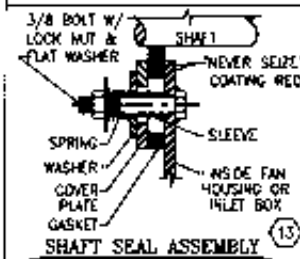


GENERAL NOTES:

- ONE FAN REQ'D - COW ROTATION
- FAN HOUSING IS NOT DESIGNED TO SUPPORT ANY EXTERNAL LOADS
- CUSTOMER IS TO PROVIDE EXPANSION JOINTS AT INLET AND OUTLET TO RELIEVE EXPANSION STRESSES AND VIBRATION.
- DOVE, BEARINGS AND PEDESTALS SHOWN AFTER THEY ARE ALIGNED AND BOLTED TOGETHER IN THE FIELD. (GOMELS PROVIDED BY OTHERS.)
- COUPLING INFORMATION:
IMPELLER HALF BORE: 3.3735/3.37254 KEYWAY: 1/2 x 1/2
BORED BY BARRON MOUNTED BY BARRON
SHOP NOTE: MOUNT IMPELLER HALF COUPLING AFTER ASSEMBLING BEARINGS ON SHAFT.
DRIVE HALF BORE: 3.3735/3.37254 KEYWAY: 7/8 x 7/16
BORED BY BARRON MOUNTED BY BARRON
- ROTATING ASSEMBLY WEIGHT: 1130 LBS.
- HOUSING STIFFENERS NOT SHOWN FOR CLARITY. (STIFF. MAT'L: 317L)
- WELD ALL STIFFENERS CROSSING SHIPPING SPLITS TOG. AT FIELD INSTALLATION.
- SEE BARRON OWNERS MANUAL FOR INSTALLATION & OPERATION INSTRUCTIONS
- SHOP TO CHECK IMPELLER TO PREVENT WOBBLING DURING SHIPMENT. CUSTOMER MUST REMOVE CHOCKS PRIOR TO START UP.
- THIS FAN IS EQUIPPED WITH AN INLET DAMPER SEE DWG. C2592301 FOR DETAILS

PAINTING REQUIREMENTS:

- BASE / GUARDS
COATED SURFACES FAN BASE - EXTERIOR ONLY
BALANCE - ALL SURFACES
SURFACE PREP: SSPC-SP7
PRIMER: SOUTHERN COATINGS #1-4338(GRAY)
NO. COATS: 1 THICKNESS PER COAT: 1-2 MILS D.F.T.
PORTIONS OF SHAFT W/O STN. STL COVERS
COATED SURFACES ALL
SURFACE PREP: SSPC-SP7
PRIMER: SOUTHERN COATINGS #1-1378(RED OXIDE)
NO. COATS: 1 THICKNESS PER COAT: 1-2 MILS D.F.T.

VARIABLE SPEED FAN VFD BY WESTATES CARBON



MADE IN THE U.S.A. PHONE (908) 688-2121

REP: HANKIN ENVIRONMENTAL
SOMERVILLE, NEW JERSEY

WESTATES CARBON ARIZONA
PARKER, ARIZONA

SCRUBBER INDUCED DRAFT FAN TAG NO. B-15

882/882 R30A S(2D.OX)SW ARRG'T #7
FAN GENERAL ARRANGEMENT

PERFORMANCE CONDITIONS	DES	HIGH	LOW
VOLUME, ACFM	10104	8420	6315
STATIC PRESSURE, IN. WG	66.0	53.0	41.0
TEMPERATURE, °F	174	174	174
DRY DENS. LB/FT³	.0443	.0458	.0464
SPEED, RPM	1980	1740	1510
POWER, HP	136	91	53
MAX. SAFE OPER. SPEED, RPM	1980		200
SHAFT CRITICAL SPEED, RPM	3260	IMPELLER W/ VFD	3166

THIS DRAWING IS THE PROPERTY OF BARRON INDUSTRIES AND IS LOANED ON THE CONDITION THAT IT SHALL NOT BE MADE PUBLIC, COPIED OR REPRODUCED IN WHOLE OR IN PART UNLESS AUTHORIZED BY BARRON INDUSTRIES

ENR: 1/18/96
PDR: 9503-019-00
DWG NO: C25923F1
SHEET 1 OF 1
REV. A

01/24/96 88230

C:\DRAWINGS\ESTATES\AMCA\A034

DRIVE SIDE ELEVATION - DRIVE ROTATION COW
MOTOR, BEARING, COUPLING AND COUPLING GUARD OMITTED FOR CLARITY

END VIEW
DRAWN: 2 1/2\"/>

NON-DRIVE SIDE ELEVATION
BEARING OMITTED FOR CLARITY

GENERAL REVISION PER CUSTOMER APPROVAL

BY: MBB
DATE: 2/13/96
CHK: DBS
APP: MBB
DATE: 2/13/96

DRAWING D95-75-S1-1
DUAL WALL STACK & DETAILS

Revision 0
February 2007

1	2/8/96	AIR TERMINALS / PORTS	JWG	RSS	
		REVISION	BY	CHK.	



WESTATES CARBON HANKIN ENVIRONMENTAL REF.# 9503-025	ARIZONA
PARKER	DUAL WALL STACK & DETAILS
_____	WARREN ENVIRONMENT, INC.

_____ ATLANTA	DUAL WALL STACK & DETAILS	_____ GEORGIA
_____ WARREN ENVIRONMENT, INC.		

ATLANTA	WARREN ENVIRONMENT, INC.	GEORGIA
---------	--------------------------	---------


DESIGN	RSS	SLR	SCALE	AS SHOWN	DATE	1/19/96	
DRAWN	JWG	RSS	DRAWING NO.				
TRACED			JOB NO.				
D95-75-S1-1							

SCALE: $\sim 3'' = 1' - 0''$

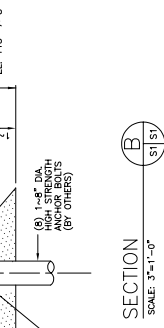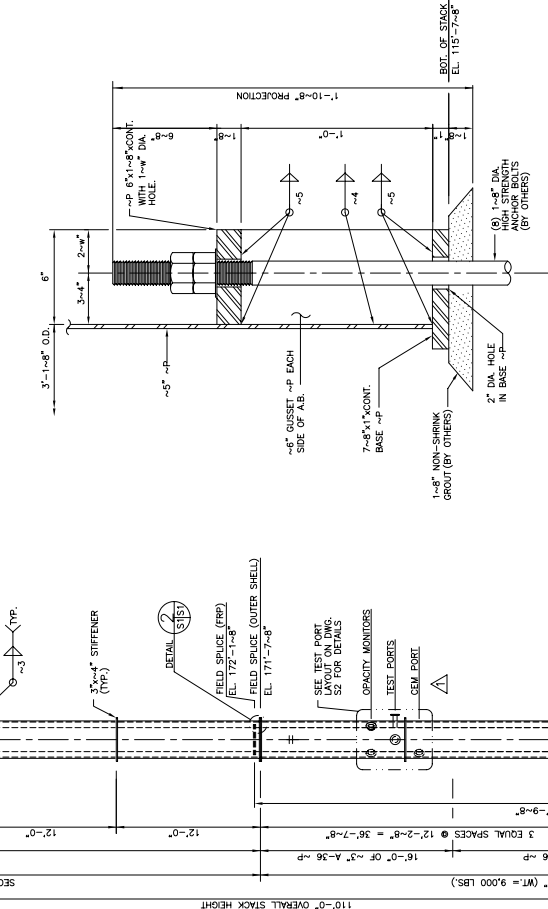[illegible]

DRAWING 1541-M-001
STACK PORT ARRANGEMENT

Revision 0
February 2007

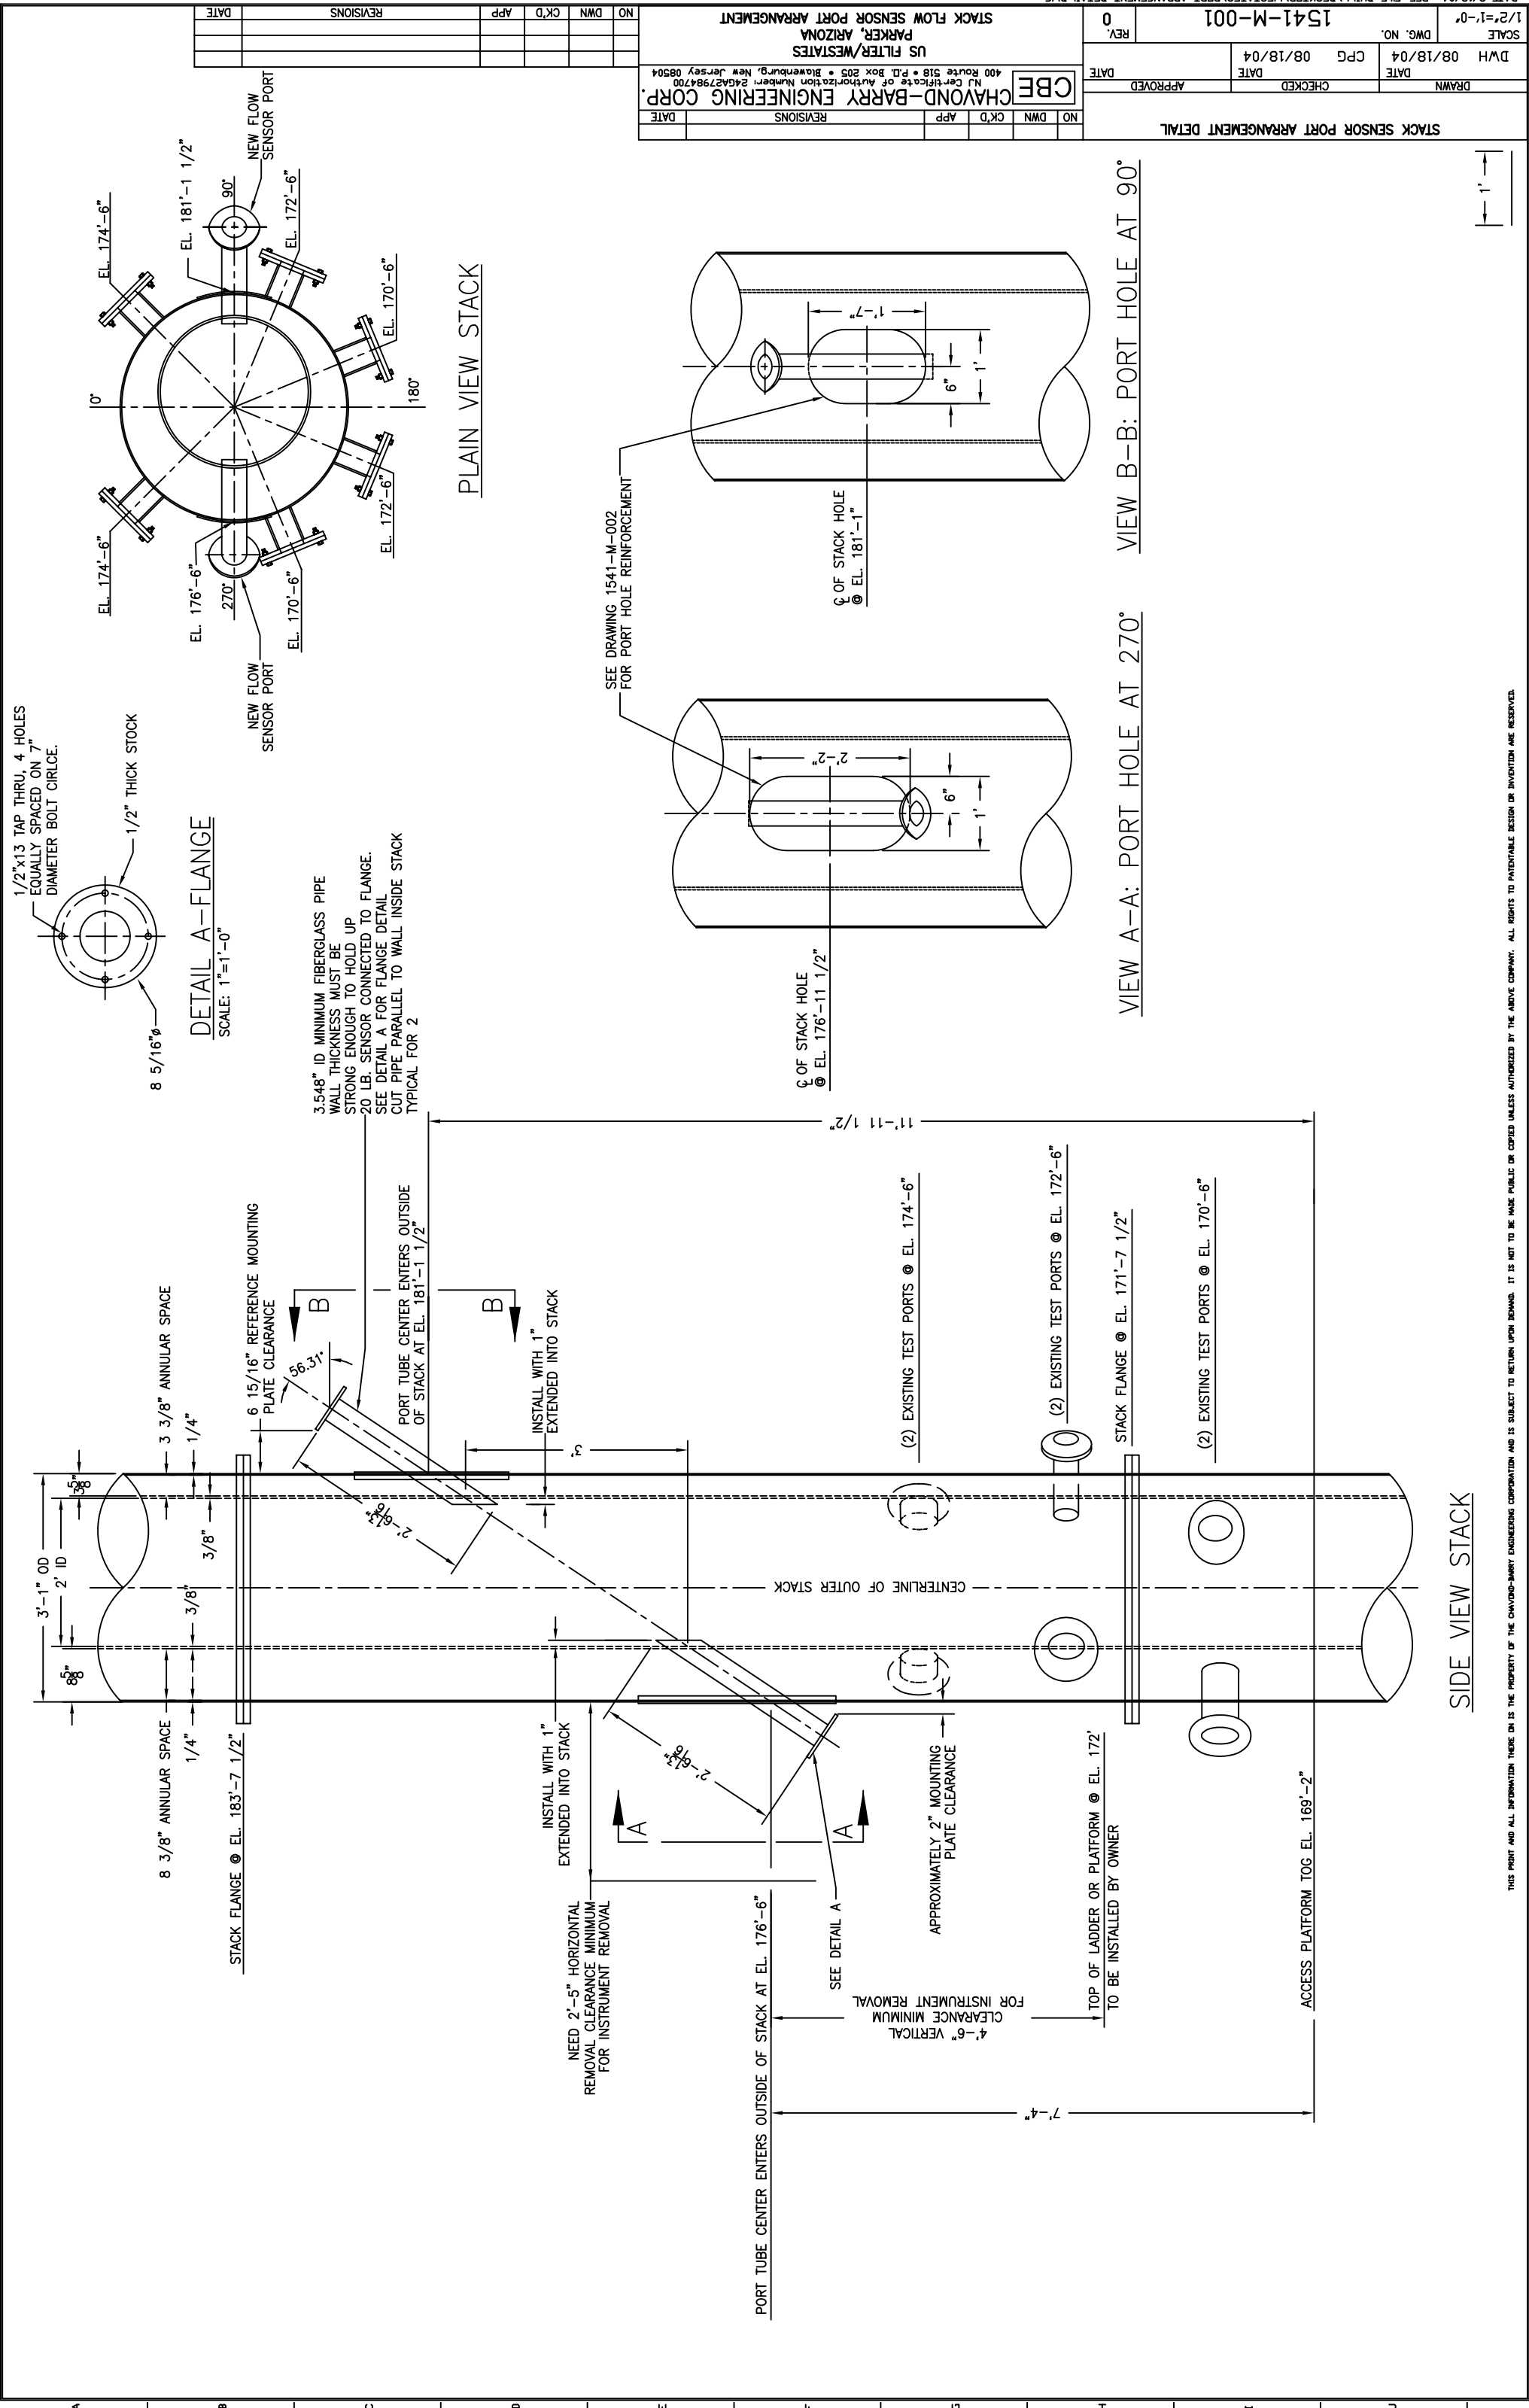

STACK SENSOR PORT ARRANGEMENT DETAIL

STACK FLOW SENSOR PORT ARRANGEMENT

VIEW A-A: PORT HOLE AT 270°

VIEW B-B: PORT HOLE AT 90°

PLAIN VIEW STACK

SIDE VIEW STACK

DETAIL A-FLANGE

SCALE: 1"=1'-0"

1/2"x13 TAP THRU, 4 HOLES
EQUALLY SPACED ON 7"
DIAMETER BOLT CIRCLE.

8 5/16"Ø

1/2" THICK STOCK

3.548" ID MINIMUM FIBERGLASS PIPE
WALL THICKNESS MUST BE
STRONG ENOUGH TO HOLD UP
20 LB. SENSOR CONNECTED TO FLANGE.
SEE DETAIL A FOR FLANGE DETAIL
CUT PIPE PARALLEL TO WALL INSIDE STACK
TYPICAL FOR 2

NEW FLOW
SENSOR PORT

NEW FLOW
SENSOR PORT

EL. 174'-6"

EL. 174'-6"

EL. 174'-6"

EL. 174'-6"

EL. 176'-6"

EL. 176'-6"

EL. 176'-6"

EL. 176'-6"

EL. 170'-6"

EL. 170'-6"

EL. 170'-6"

EL. 170'-6"

EL. 172'-6"

EL. 172'-6"

EL. 172'-6"

EL. 172'-6"

EL. 181'-1 1/2"

EL. 181'-1 1/2"

90°

270°

0°

180°

PORT TUBE CENTER ENTERS OUTSIDE
OF STACK AT EL. 181'-1 1/2"

INSTALL WITH 1"
EXTENDED INTO STACK

NEED 2'-5" HORIZONTAL
REMOVAL CLEARANCE MINIMUM
FOR INSTRUMENT REMOVAL

INSTALL WITH 1"
EXTENDED INTO STACK

APPROXIMATELY 2" MOUNTING
PLATE CLEARANCE

TOP OF LADDER OR PLATFORM @ EL. 172'
TO BE INSTALLED BY OWNER

ACCESS PLATFORM TOG EL. 169'-2"

PORT TUBE CENTER ENTERS OUTSIDE OF STACK AT EL. 176'-6"

SEE DETAIL A

FOR INSTRUMENT
REMOVAL

4'-6" VERTICAL
CLEARANCE MINIMUM

7'-4"

2'-6 3/8"

2'-6 3/8"

56.31°

6 15/16" REFERENCE MOUNTING
PLATE CLEARANCE

3 3/8" ANNULAR SPACE

1/4"

3/8"

3'-1" OD

2' ID

15/8"

3 3/8" ANNULAR SPACE

1/4"

3/8"

11'-11 1/2"

EL. 174'-6"

EL. 172'-6"

EL. 171'-7 1/2"

EL. 170'-6"

CENTERLINE OF OUTER STACK

THIS PRINT AND ALL INFORMATION THERE ON IS THE PROPERTY OF THE CHAVOND-BARRY ENGINEERING CORPORATION AND IS SUBJECT TO RETURN UPON DEMAND. IT IS NOT TO BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED BY THE ABOVE COMPANY. ALL RIGHTS TO PATENTABLE DESIGN OR INVENTION ARE RESERVED.

NORTH AMERICAN MODEL 6422 BURNER INFORMATION

Revision 0
February 2007



6422 Fire-All Dual-Fuel Burners are widely used on heat treat and non-ferrous melting furnaces, kilns, ovens, air heaters, dryers, chemical process equipment, and other applications where superior temperature uniformity is required. (For higher temperature service, specify 6425 Burners.)

These sealed-in, nozzle-mix burners for gas and/or distillate oil are stable on stoichiometric ratio, with large amounts of excess air, or with up to 50% excess fuel (provided additional air for combustion is in the furnace near the burner).

OPERATION

Burners can be lighted at rich, lean, or correct air/fuel ratio, then immediately turned to high fire.

Required gas pressures are low: 1 psi at the burner for coke oven gas, less for natural gas. Required oil pressure at the burner is nearly zero, but a pressure drop of about 10 psi should be taken across the Sensitrol™ Valve.

The most common ratio control system for 6422 Burners uses a cross-connected regulator and Ratiotrol™. When appropriate for the application, flow balancing systems or fuel only control (see "Excess Air" paragraph) is very satisfactory.

If furnace temperatures after shutdown rise above 1900 F, pass some air through burner to prevent overheating. During gas operation, use at least 4 psi atomizing air to cool atomizer (full atomizing air may be used); or for extended periods of operation on gas, atomizer can be withdrawn and stored: Use a backplate and gasket to seal rear of burner (see Dimensions & Parts List 4422-2).

LIGHTING/FLAME SUPERVISION

A 4011 Pilot Set normally is used to light 6422 Burners. On gas, direct spark ignition of the burner is available--see Sheet 4055. A manual torch can be used in some applications.


Burners accept ultraviolet (UV) scanners for monitoring pilot or main flame. A flame rod can be used to monitor pilot or main gas fire. Adapters are listed in Bulletin 8832.

When using flame supervision, an **interrupted** pilot is required--do **not** use constant or intermittent pilots. If using direct spark ignition, turn off spark after burner lights.

Table I. TOTAL AIR CAPACITIES*
 scfh
 (for Btu/hr, multiply by 100)

Burner designation	16 psi air at burner
6422-2	2 600
6422-3	4 100
6422-4	6 300
6422-5	10 300
6422-7-A	27 000
6422-7-B	33 500
6422-8-A	44 800

* Includes combustion and atomizing air.

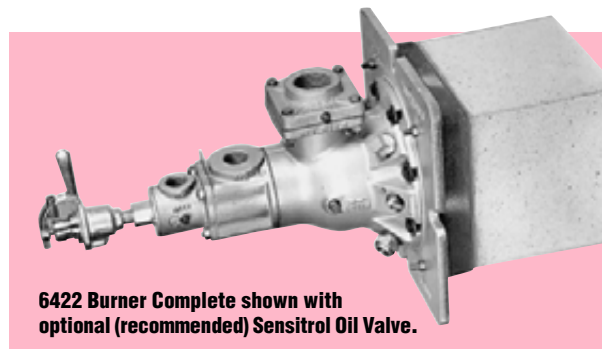

6422 Burner Complete shown with optional (recommended) Sensitrol Oil Valve.

An observation port is furnished with all burners. Positions of pilot, flame detector, and observation port are interchangeable, as long as pilot and flame detector are mounted in adjacent holes.

STANDARD CONSTRUCTION

Burner bodies are heat resistant cast iron with Inconel air tubes. Mounting plate and tile assembly can be separated from the burner body for installation convenience. Air and gas connection orientation can be rotated in 90° intervals, but air and gas pipes should be brought in from the top or side to prevent oil dripping into them. When reassembling the burner, the pilot and flame detector notches in the tile and mounting must be in proper alignment with the pilot and flame detector connections on the burner body (applies to 6422-2 through 6422-6 sizes). Burner is complete with cast iron mounting plate and 9" long 3200 F castable burner tile which must be supported and sealed in a hard refractory furnace wall. (See page 2 of Dimensions 6422 for optional construction suitable for fiber lined furnaces.) When the furnace wall is thicker than the tile length, the tunnel beyond the end of the burner tile should be flared at a 30° or greater included angle, starting at the OD of the tile. Extension tiles are not recommended. (See Supplement DF-M1 for detailed tile installation recommendations.)

TILE SUPPORT JACKETS (6422- -LC, 6422- -L4, 6422- -L9)

6422 Burners with the standard 9" long square tiles are also available with support jackets for applications such as air heaters where frequently the tile is not supported by refractory. They also can be mounted in furnaces when desired. Jackets are available in three different metals and maximum temperature ratings. They must be protected with sufficient insulation so as not to exceed rated temperature. Maximum temperature rating for jacket metals depends upon frequency of heat-up/cool-down cycles. As an example, batch annealing furnaces that are heated and cooled every day should use the "intermittent exposure" ratings. Burners in a continuous annealing furnace that remain at the same temperature for months at a time, can use the higher "continuous" rating.

Designation	Jacket Metal	Continuous max.temp.	Intermittent exposure
6422- -LC	carbon steel	700 F	700 F
6422- -L4	304 SST	1600 F	1500 F
6422- -L9	309 SST	1900 F	1800 F

EXCESS AIR

Excess air can improve temperature uniformity by avoiding hot spots in front of burners, by churning furnace atmosphere to reduce stratification, and by creating positive furnace pressure to eliminate cold air infiltration.

Excess air can give very high effective burner turndown. Thus a furnace used for high temperature work (such as heat treating at 1900 F) with burners firing on stoichiometric air/fuel ratio can also be used for low temperature jobs (such as drawing or drying at 600 F) with burners firing on lean ratio.


Table II. ATOMIZING AIR CAPACITIES in scfh

Burner designation	air pressure drop across burner in osi					
	14	16	18	20	22	24
6422-2, -3, -4	500	520	560	600	620	650
6422-5	640	690	720	760	800	840
6422-6	800	850	910	950	1000	1050
6422-7-A,-7-B	870	930	990	1040	1100	1150
6422-8-A	2650	2840	3000	3170	3320	3480

Table III. COMBUSTION AIR CAPACITIES in scfh

(not including atomizing air)

Burner designation	air pressure drop across burner in osi							approx. flame lengths with 16 osi Main Air (in open furnace)	
	0.1	1	5	6	8	12	16	gas	oil
6422-2	160	520	1 160	1 270	1 470	1 800	2 100	1/2'	1 1/2'
6422-3	280	890	1 980	2 160	2 500	3 050	3 550	1 1/2'	2'
6422-4	460	1 450	3 240	3 540	4 100	5 000	5 800	2'	2 1/2'
6422-5	750	2 370	5 300	5 800	6 700	8 150	9 450	2 1/2'	2 1/2'
6422-7-A	2070	6 550	14 600	16 000	18 500	22 700	26 200	6'	6'
6422-7-B	2580	8 150	18 200	19 900	23 000	28 200	32 600	6'	5'
6422-8-A	3320	10 500	23 500	25 800	29 700	36 400	42 000	7'	6'

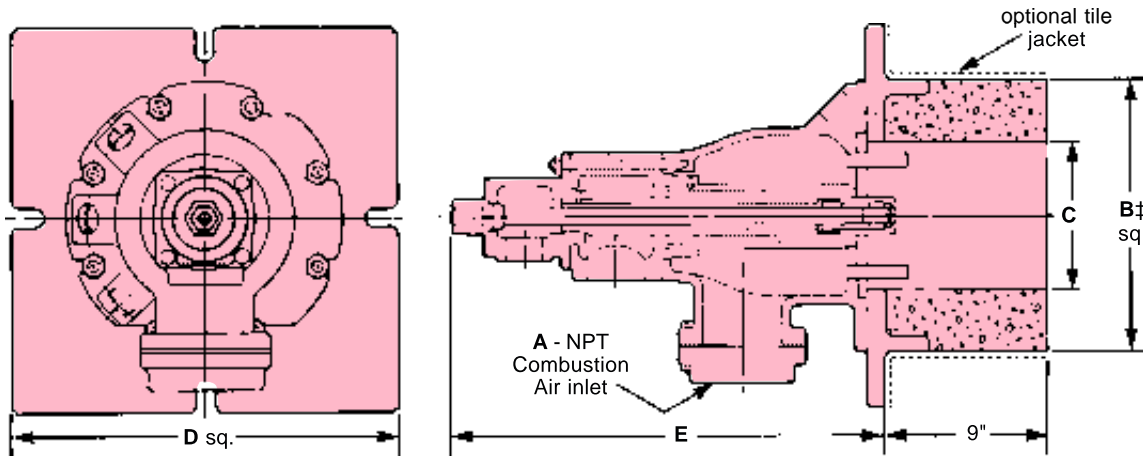

NOTE: For 6422-8-A, air and gas connections, cannot be piped in the same plane because the "flower pot" type air connection flange would interfere with the 2 1/2" gas line.

CLEARANCE DIMENSIONS
(for details, see Dimensions 6422)

Burner designation	dimensions in inches				
	A	B†	C	D	E
6422-2	1 1/4	8 1/2	5	12	13 5/8
6422-3	1 1/2	8 1/2	5	12	13 5/8
6422-4	2	8 1/2	5	12	13 5/8
6422-5	2 1/2	8 1/2	5	12	13 5/8
6422-7-A	4	10	7	13 1/2	17 7/8
6422-7-B	4	10	7	13 1/2	17 7/8
6422-8-A	6	10	7	13 1/2	17 7/8

† 6422- L_ metal jackets add about 1" to tile OD.

Table IV. MAXIMUM EXCESS AIR RATES in %
(without pilot)

Burner designation	GAS			OIL		
	Combustion Air pressure 1 osi	8 osi	14 osi	Combustion Air pressure 1 osi	8 osi	14 osi
6422-2	—	380	500	—	380	500
6422-3	330	1000	1300	210	480	670
6422-4	560	1560	1560	480	800	900
6422-5	1070	1440	1150	50	250	400
6422-7-A	3200	4900	1000	160	330	450
6422-7-B	900	1450	1600	150	700	830
6422-8-A	460	660	400	200	280	350


DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM NORTH AMERICAN MFG. CO. IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.

WARNING: Situations dangerous to personnel and property can develop from incorrect operation of combustion equipment. North American urges compliance with National Safety Standards and Insurance Underwriters recommendations, and care in operation.

North American Mfg. Co., 4455 East 71st Street, Cleveland, OH 44105-5600 USA, Tel: +1.216.271.6000, Fax: +1.216.641.7852
email: sales@namfg.com • www.namfg.com

April 2002


DIMENSIONS in inches

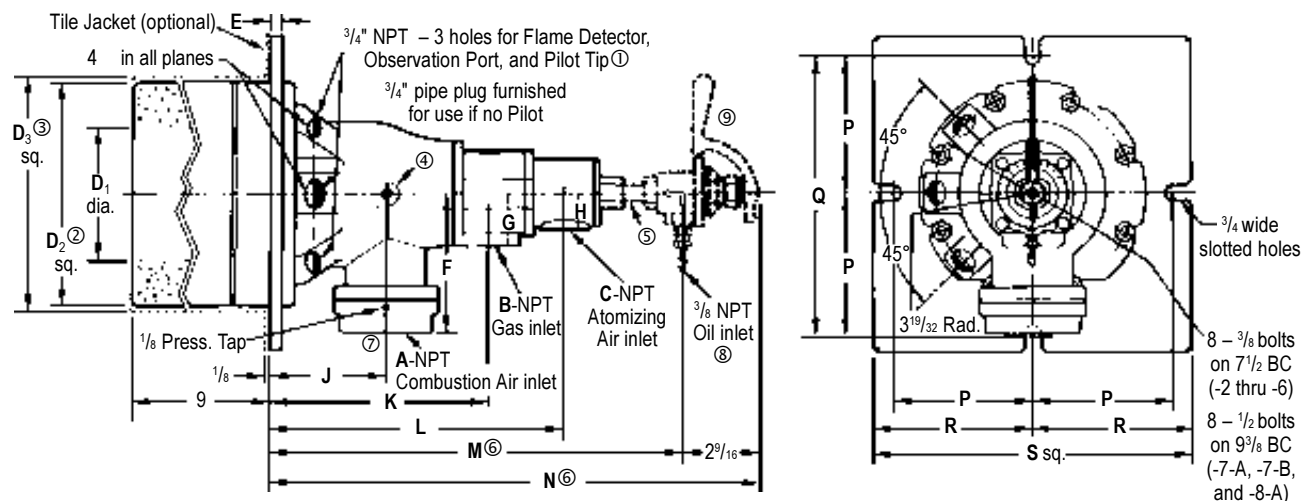

DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM NORTH AMERICAN MFG. CO.
IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.

Burner designation	dimensions in inches																		
	A	B	C	D ₁	D ₂ ②	D ₃ ③	E	F	G	H	J	K	L	M⑥	N⑥	P	Q	R	S
6422-2	1 ¹ / ₄	1	³ / ₄	5	8 ¹ / ₂	9 ¹ / ₂	¹ / ₂	5 ¹ / ₄	2	1 ³ / ₈	4 ³ / ₈	8 ³ / ₈	11 ⁵ / ₁₆	15 ¹³ / ₁₆	18 ³ / ₈	5 ¹ / ₄	10 ¹ / ₂	6	12
6422-3	1 ¹ / ₂	1	³ / ₄	5	8 ¹ / ₂	9 ¹ / ₂	¹ / ₂	5 ¹ / ₄	2	1 ³ / ₈	4 ³ / ₈	8 ³ / ₈	11 ⁵ / ₁₆	15 ¹³ / ₁₆	18 ³ / ₈	5 ¹ / ₄	10 ¹ / ₂	6	12
6422-4	2	1 ¹ / ₄	³ / ₄	5	8 ¹ / ₂	9 ¹ / ₂	¹ / ₂	5 ¹ / ₄	2	1 ³ / ₈	4 ³ / ₈	8 ³ / ₈	11 ⁵ / ₁₆	15 ¹³ / ₁₆	18 ³ / ₈	5 ¹ / ₄	10 ¹ / ₂	6	12
6422-5	2 ¹ / ₂	1 ¹ / ₂	1	5	8 ¹ / ₂	9 ¹ / ₂	¹ / ₂	5 ¹ / ₄	2	1 ³ / ₈	4 ³ / ₈	8 ³ / ₈	11 ⁵ / ₁₆	15 ¹³ / ₁₆	18 ³ / ₈	5 ¹ / ₄	10 ¹ / ₂	6	12
6422-6	3	1 ¹ / ₂	1	5	8 ¹ / ₂	9 ¹ / ₂	¹ / ₂	5 ⁹ / ₁₆	2	1 ³ / ₈	4 ³ / ₈	8 ³ / ₈	11 ⁵ / ₁₆	15 ¹³ / ₁₆	18 ³ / ₈	5 ¹ / ₄	10 ¹ / ₂	6	12
6422-7-A	4	2 ¹ / ₂	1 ¹ / ₄	7	10	11	⁹ / ₁₆	6 ⁵ / ₁₆	2 ⁵ / ₈	2 ¹ / ₈	5 ⁷ / ₈	11	15 ¹ / ₈	20 ¹ / ₁₆	22 ⁵ / ₈	6 ¹ / ₈	12 ¹ / ₄	6 ³ / ₄	13 ¹ / ₂
6422-7-B	4	2 ¹ / ₂	1 ¹ / ₄	7	10	11	⁹ / ₁₆	6 ¹⁵ / ₁₆	2 ⁵ / ₈	2 ¹ / ₈	5 ⁷ / ₈	11	15 ¹ / ₈	20 ¹ / ₁₆	22 ⁵ / ₈	6 ¹ / ₈	12 ¹ / ₄	6 ³ / ₄	13 ¹ / ₂
6422-8-A	6	2 ¹ / ₂	2	7	10	11	⁹ / ₁₆	10 ¹¹ / ₁₆	2 ⁵ / ₈	1 ³ / ₄	5 ⁷ / ₈	11	15 ¹ / ₈	20 ¹ / ₁₆	22 ⁵ / ₈	6 ¹ / ₈	12 ¹ / ₄	6 ³ / ₄	13 ¹ / ₂

Burner designation	wt, lb	Recommended Sensitrol™ Oil Valve [®]	Recommended Pilot Size
6422-2	83	1813-02-A	
6422-3	83	1813-02-A	4011-11
6422-4	83	1813-02-A	(or)
6422-5	83	1813-02-A	4011-12
6422-6	83	1813-02-B	
6422-7-A	139	1813-02-C	4011-11
6422-7-B	139	1813-02-C	(or)
6422-8-A	145	1813-02-D	4011-12

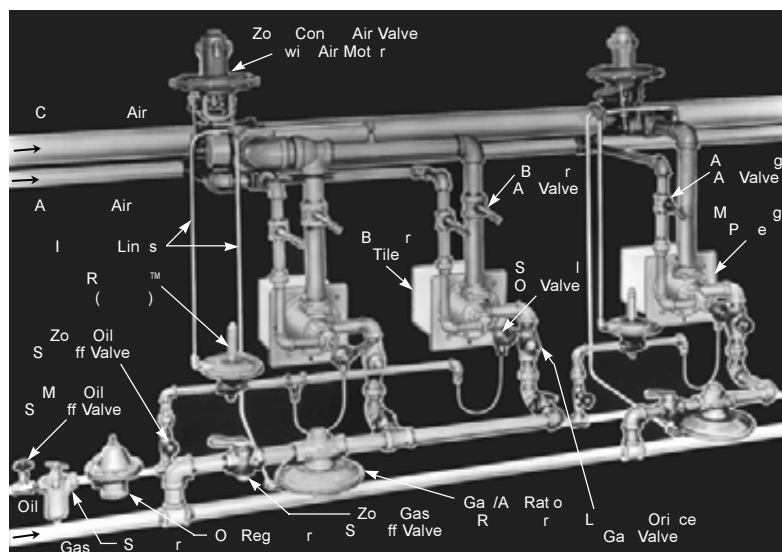

Piping arrangement for single- and double-burner zones.

- ① Pilot, Flame Detector, and Observation Port positions are interchangeable, as long as pilot and flame detector are in adjacent holes.
- ② Opening in furnace shell should be about $\frac{1}{2}$ " larger than dimension D₂ to allow for fillets and draft on mounting plate.
- ③ For 6422- -LC, -L4 and -L9 Burners only. Opening in oven shell should be about $\frac{1}{4}$ " larger than dimension D₃.
- ④ $\frac{1}{4}$ " body air pressure tap on -2, -3, -4, -5, and -6. $\frac{1}{8}$ " body air pressure tap on -7-A, -7-B and -8-A.
- ⑤ Pipe nipple not furnished by North American.
- ⑥ Dimensions M and N assume the use of a $\frac{3}{8}$ " NPT close nipple between burner and Sensitrol Oil Valve.
- ⑦ For 6422-8-A, air and gas connections cannot be piped in the same plane because the "flower pot" type air connection flange would interfere with the 2 $\frac{1}{2}$ " gas line.
- ⑧ Metal tubing is offered as an extra cost option (order as P.N. 3-0310-7).
- ⑨ Optional (recommended) Sensitrol Oil Valve is not included as part of the burner assembly, and must be ordered separately.

ALTERNATIVE MODELS

6422 Burners for Fiber Lined Furnaces. For furnaces with ceramic fiber walls, special mounting tile construction is available: 11" diameter tile, jacketed in RA330 expanded metal for all but 2" of its length; a circular mounting flange factory-installed from 2" to 9" ("Z" dimension) from the hot face of the tile.


Customer must specify this dimension to nearest 1/8" so tile face is about flush with inside furnace wall.

This construction is suitable for 2000 F furnace temperature.

See Supplement DF-M2 for detailed tile installation recommendations for fiber-lined furnaces.

Dimensions in inches			
Size	A	B	Z
-2 thru -6	5	13	†
-7-A thru -8-A	7	14	†

† "Z" dimension variable in 1/8" increments from 2" to 9".

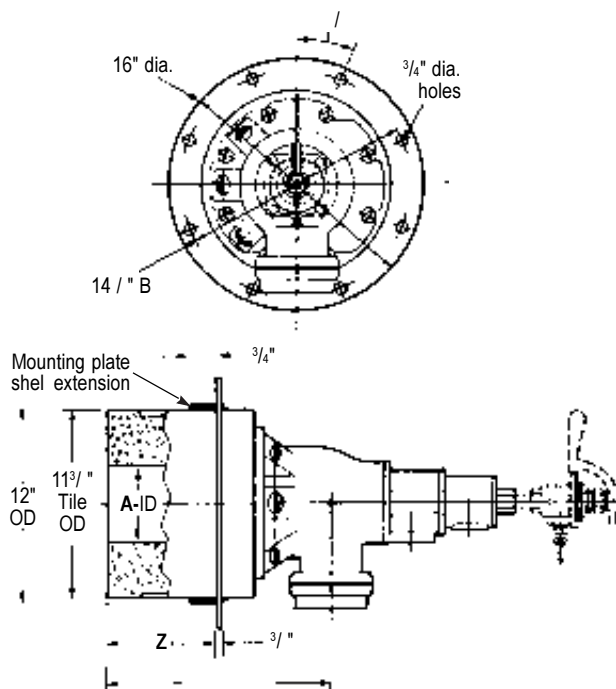


To order, specify: 6422-(code)-(A or B if applicable) (Z) Burner complete. (Order 1813 Sensitrol™ Oil Valve separately--it is not included in complete burner assembly.) Include Z dimension in the burner description: between 2" and 9", written to the nearest 0.5" as a decimal.

Example: Line Item 10 = 6422-7-AZ Burner complete with Z dimension of 6.0"
Line Item 20 = 1813-02-C Sensitrol Oil Valve.

6422 Burners with Extra Pilot and Flame Detector Location. The fixed relationship between 6422 Burner air connections and pilot/flame detector holes occasionally presents problems in mounting pilots and flame detectors clear of furnace buckstays or other structural members.

6422-2 through -6 Burners can be furnished with a 4-hole OC3-2042 burner body that has a set of pilot and flame detector holes on each side. Either set can be used and one on the other side used for an observation port--plug any unused holes.

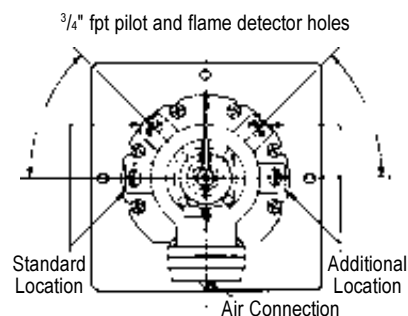

T, specify: 6422D-(code) Burner complete. (Order 1813 Sensitrol Oil Valve separately--it is not included in complete burner assembly.)

Example: Line Item 10 = 6422D-2 Burner complete with Special Double-Boss Body
Line Item 20 = 1813-02-A Sensitrol Oil Valve

WARNING: Situations dangerous to personnel and property can develop from incorrect operation of combustion equipment. North American urges compliance with National Safety Standards and Insurance Underwriters recommendations, and care in operation.

North American Mfg. Co., 4455 East 71st Street, Cleveland, OH 44105-5600 USA, Tel: +1.216.271.6000, Fax: +1.216.641.7852
email: sales@namfg.com • www.namfg.com

NORTH AMERICAN MODEL 6514 BURNER INFORMATION

Revision 0
February 2007



6514 FIRE•ALL Dual-Fuel Burners are nozzle mix, sealed-in burners for gas, light oil, or heavy oil. Capable of efficient operation throughout a wide temperature range, these burners are equally at home on low temperature ovens and high temperature forge and melting furnaces.

Ruggedly built for sustained, maintenance-free operation, 6514 Burners also provide for quick change of fuels without disturbing process operations.

Sealed mountings help maintain furnace pressure, controlled atmosphere, and closer air/fuel ratio control--all contributing to better product quality.

Fire•All Burners have been used for years on all types of furnaces with great success.


COMBUSTION CHARACTERISTICS

Oil. Oil viscosity at the burners must not exceed 100 SSU. Minimum atomizing air pressure at the burners is 14 osi for light oil, 22 osi for heavy oil.

Gas. Atomizing air (4 osi minimum) should be left on to protect the atomizer. Maximum required natural gas pressure at the burner for stoichiometric ratio is about 1/4 of the combustion air pressure.

Air/Fuel Ratio. 6514 Dual-Fuel Burners are stable with at least 100% excess air. They also can operate with excess fuel without forming carbon, but additional air for complete combustion must be available in the furnace near the burner.

For limits in a specific case, either rich or lean, consult North American.

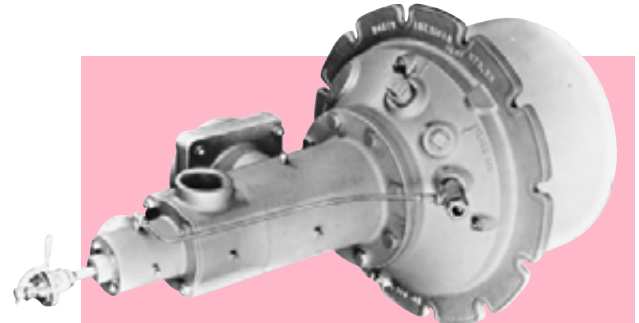

6514 Burner Complete shown with optional (recommended) Sensitrol™ Oil Valve.

Turndown. Fire•All Burners can be turned down to atomizing air only (with fuel to match) except when burning residual oils in a cold, tight furnace. For prolonged operation on atomizing air only, specify an alloy burner nose if furnace temperature is above 1600 F.

Preheated Air. 6514 Burners are designed for use with ambient air. They are suitable for some preheated air applications (up to 700 F preheat). Consult North American.

Total air capacities (including main and atomizing air)


Burner designation	16 osi air pressure drop across the burner				24 osi air pressure drop across the burner				Approx. flame lengths with 16 osi main air (in open furnace)
	Air ^① scfh	Light oil ^② gph	Heavy oil ^③ gph	Gas ^④ scfh	Air scfh	Light oil gph	Heavy oil gph	Gas scfh	
6514-6	17 900	13	12	1 790	21 900	16	15	2 190	4' - 5'
6514-7	28 400	21	19	2 840	34 800	26	23	3 480	5' - 6'
6514-8-A	48 900	36	33	4 890	60 000	44	40	6 000	8' - 9'
6514-8-B	81 500	60	54	8 150	100 000	74	67	10 000	9' - 12'
6514-9	165 000	122	110	16 500	202 000	150	135	20 200	15' - 18'
6514-10	247 000	183	165	24 700	303 000	224	202	30 300	20'

① For Btu/hr, multiply by 100

② Light oil at 135 000 Btu/gal.

③ Heavy oil at 150 000 Btu/gal.

④ Natural gas at 1000 Btu/cf.

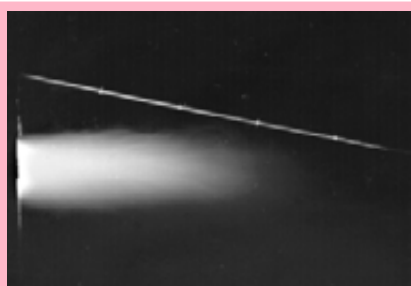

Gas (left) and light oil flames for 6514-6 Dual-Fuel Burner with 16 osi main and atomizing air pressure drop across burner. White lines on pipe above flame indicate 1' intervals.



SPECIFICATIONS

Flame Supervision. An ultraviolet cell† will monitor pilot or main flame on gas or oil. For maximum safety, North American urges interrupted pilots when flame safeguards are used--pilots should be on only for a preset ignition period (usually 15 seconds), after which flame supervision detects main fire only. Adapters or mounting flame detection devices on 6514 Burners are tabulated on Bulletin 8832.

Tile/Installation. Burner tiles are cast refractory rated or 2800F furnace temperature. They should be supported securely in the furnace wall by castable refractory (not insulation) at least 9" thick all around the tile, extending back to the furnace shell and securely anchored to it. (See Supplement DF-M1.)

Tiles are replaceable in the field except for the 6514-10, whose mounting must be returned to the factory for tile replacement (or purchase a spare mounting plate with a tile cast onto it).

For furnace walls thicker than the length of the tile, the tunnel beyond the end of the tile should be flared at a 30° (included) angle, starting at the OD of the tile. If this is not practical, consult North American for specific recommendations.

Complete burners include tile, mounting plate, and an observation port into which a small quantity of atomizing air is introduced to keep the glass clear. Order pilot tips and Sensitrol™ Oil Valve separately.

SPECIAL OPTIONS

The following options are available for the 6514 burner but require consultation with your North American field engineer or application and ordering information.

1. **Increased capacities** - most sizes are available with up to 30% extra capacity.
2. **Hinged bodies** for easy access to internals.
3. **Short flame** versions are available in most sizes.
4. **Special high pressure oil atomizers** are available.

† Cleaning air must be introduced into the port downstream of the sensor to keep oil and pcc's of the lens.

Jacketed Tiles. 6514 Burners are available with support jackets around the tile for applications where the tile is not supported by furnace refractory.


Jackets are available in three different metals and have maximum temperature ratings for each. They must be protected with sufficient insulation so as not to exceed rated temperature.

Maximum temperature rating for jacket metals depends upon frequency of heat-up/cool-down cycles. As an example, batch annealing furnaces that are heated and cooled every day should use the "intermittent exposure" ratings. Continuous annealing furnaces that remain at the same temperature for months at a time, can use the higher "continuous" rating.

Designation	Jacket Metal	Continuous max.temp.	Intermittent exposure
6514- -LC	carbon steel	700 F	700 F
6514- -L4	304 stainless	1600 F	1500 F
6514- -L9	309 stainless	1900 F	1800 F



6514's on a
2400 F slab heater.

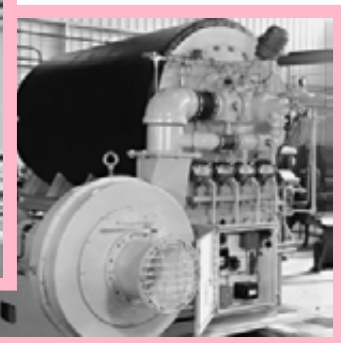


6514 on a
600 F air heater.

Burner designation	Main air capacities in scfh						Atomizing air capacities in scfh					
	Air pressure drop across the burner in psi						Air pressure drop across the burner in psi					
	1	5	6	8	12	16	14	16	18	20	22	24
6514-6	3 710	8 300	9 100	10 500	12 900	14 900	2 800	3 000	3 180	3 360	3 510	3 660
6514-7	6 100	13 600	15 000	17 200	21 000	24 400	3 770	4 030	4 270	4 500	4 720	4 900
6514-8-A	10 600	23 700	26 000	30 000	36 700	42 400	6 050	6 500	7 000	7 300	7 600	7 850
6514-8-B	17 600	39 200	43 000	49 600	60 500	70 000	10 600	11 300	12 000	12 700	13 200	13 800
6514-9	36 600	82 000	89 500	104 000	127 000	146 000	17 200	18 400	19 600	20 700	21 600	22 500
6514-10	54 500	122 000	135 000	154 000	189 000	218 000	27 200	29 100	30 900	32 600	34 100	35 500

CLEARANCE DIMENSIONS (for details, see Dimensions 6514)

Burner designation	dimensions in inches					
	A	B	C	D	E	F
6514 & 6514-6-L	3	15	10 ³ / ₈	19 ¹ / ₂	23 ⁵ / ₁₆	9
6514 & 6514-7-L	4	16	11 ³ / ₈	20 ¹ / ₂	25 ¹ / ₂	9
6514 & 6514-8-AL	6	17 ³ / ₄	12 ³ / ₈	22 ³ / ₄	32 ¹ / ₁₆	10
6514 & 6514-8-BL	6	19	13 ¹ / ₂	24	35 ¹⁵ / ₁₆	13
6514 & 6514-9-L	8	23	16	28	44 ³ / ₁₆	13 ¹ / ₂
6514 & 6514-10-L	10	27 ¹ / ₂	20 ¹ / ₂	32 ¹ / ₂	50 ⁹ / ₁₆	13 ⁷ / ₁₆

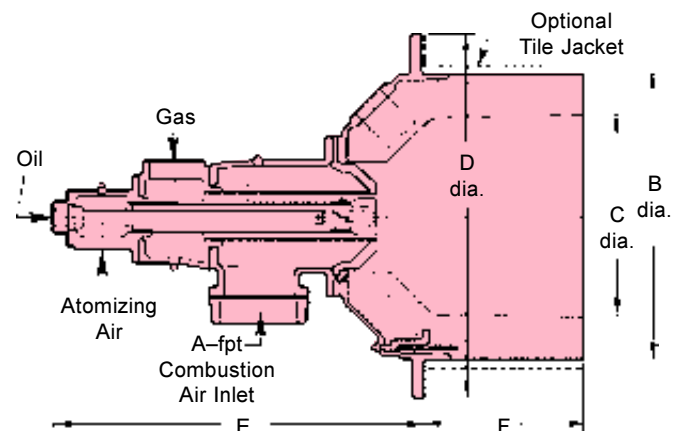

DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM NORTH AMERICAN MFG. CO. IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.


WARNING: Situations dangerous to personnel and property can develop from incorrect operation of combustion equipment. North American urges compliance with National Safety Standards and Insurance Underwriters recommendations, and care in operation.

North American Mfg. Co., 4455 East 71st Street, Cleveland, OH 44105-5600 USA, Tel: +1.216.271.6000, Fax: +1.216.641.7852
email: sales@namfg.com • www.namfg.com



May 2002

DIMENSIONS – Main air, gas, atomizing air, and oil connections can be rotated relative to one another and to the mounting plate. Drawings show connections as assembled at the factory. These arrangements reduce maintenance by preventing oil dripping into air or gas manifolds (which should be above burners) and by minimizing dirt accumulation in pilots and flame supervisory devices. Pilot and main air connections cannot be aligned in the same direction.

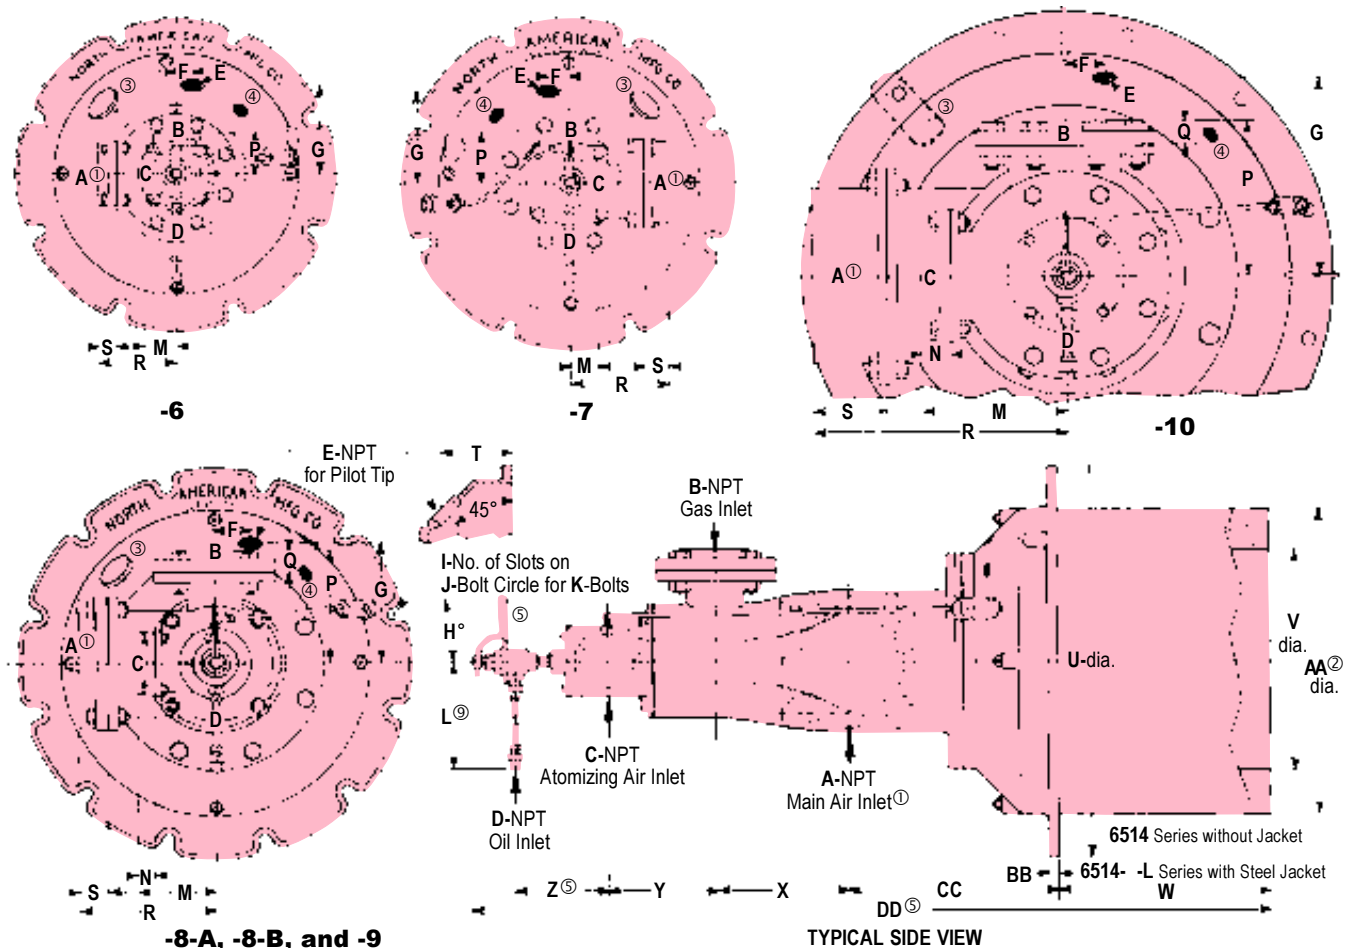

DIMENSIONS SHOWN ARE SUBJECT TO CHANGE. PLEASE OBTAIN CERTIFIED PRINTS FROM NORTH AMERICAN MFG. CO.
IF SPACE LIMITATIONS OR OTHER CONSIDERATIONS MAKE EXACT DIMENSION(S) CRITICAL.

Burner designation	Common dimensions in inches and degrees for 6514 and 6514- -L														
	A ^①	B	C	D	E	F	G	H°	I	J	K	L ^⑨	M	N	P
6514-6	3	2	1½	⅜	¾	1	5 ¹⁷ / ₃₂	22½	8	18	⅝	19¾	2	—	2½
6514-7	4	2½	2	⅜	1¼	1¼	5¾	22½	8	19	⅝	19¾	1¾	—	3¼
6514-8-A	6	2½	2½	⅜	1¼	1½	6 ⁷ / ₈	15	12	21¼	⅝	19¾	2¾	—	3 ⁷ / ₈
6514-8-B	6	3 ^⑧	3 ^⑦	⅜	1¼	2¼	7 ³ / ₈	15	12	22½	⅝	19¾	5 ³ / ₁₆ ①	1½	6 ¹³ / ₁₆
6514-9	8	4 ^⑧	4 ^⑦	½	1½	2¼	9 ⁷ / ₈	15	12	26½	⅝	20¾	7 ¹³ / ₁₆ ①	1½	8¾
6514-10	10	6 ^⑧	6 ^⑦	½	1½	2½	12 ³ / ₁₆	15	12	30½	¾	20¾	8 ¹³ / ₁₆ ①	1¾	9 ⁵ / ₈

Burner designation	Common dimensions in inches for 6514 and 6514- -L											for 6514 only				wt lb
	Q	R	R ₁ ⑥	S	T	U	V	W	X	Y	Z ⑤	AA ②	BB	CC	DD ⑤	
6514-6	—	5 ³ / ₁₆	10 ³ / ₈	1½	3 ⁵ / ₁₆	19½	10 ³ / ₈	9	3 ⁷ / ₈	4	4 ¹ / ₁₆	15	5/8	8 ⁵ / ₁₆	31 ¹¹ / ₁₆	165
6514-7	—	6 ¹ / ₁₆	10 ¹ / ₈	1½	3 ¹⁵ / ₁₆	20½	11 ³ / ₈	9	4 ¹¹ / ₁₆	4 ¹ / ₁₆	4 ⁷ / ₁₆	16	5/8	9 ¹ / ₄	34	215
6514-8-A	—	7 ⁵ / ₁₆	11¼	1¾	4 ⁵ / ₁₆	22¾	12¾	10	6¼	4 ¹⁵ / ₁₆	4 ¹⁵ / ₁₆	17¾	5/8	12 ⁷ / ₈	41 ⁹ / ₁₆	300
6514-8-B	1¾	8 ⁷ / ₁₆	12¾	1¾	4 ⁵ / ₁₆	24	13½	13	8 ¹ / ₈	6 ¹¹ / ₁₆	5 ³ / ₁₆	19	5/8	12 ⁷ / ₈	48 ⁷ / ₁₆	410
6514-9	1 ⁵ / ₁₆	13¾	—	3 ¹³ / ₁₆	6 ³ / ₁₆	28	16	13½	11 ⁵ / ₁₆	8 ⁷ / ₁₆	6 ³ / ₁₆	23	5/8	14 ¹¹ / ₁₆	57 ³ / ₁₆	705
6514-10	1 ⁹ / ₁₆	15 ⁷ / ₁₆	—	4¾	5 ¹⁵ / ₁₆	32½	20½	13 ⁷ / ₁₆ †	13 ¹ / ₁₆	11 ³ / ₁₆	6 ¹¹ / ₁₆	27½	1½	16 ¹ / ₈	63 ⁵ / ₈	990

See back for notes and additional information, including 6514- -L dimensions and weights.

† 6514-10 only is offered with a short (2") tile designated 6514-10-S.

Burner designation	for 6514- -L only				wt lb	for 6514 and 6514- -L only	
	AA	BB	CC	DD		Recommended Sensitrol™ oil valve	Recommended pilot tip
6514-6	16	$\frac{3}{4}$	$8\frac{7}{16}$	$32\frac{5}{16}$	190	1813-02-C	4021-12
6514-7	17	$\frac{3}{4}$	$9\frac{3}{8}$	$34\frac{1}{2}$	245	1813-02-D	4025-0-T
6514-8-A	$18\frac{3}{4}$	$\frac{3}{4}$	13	$42\frac{1}{16}$	335	1813-02-D	4025-0-T
6514-8-B	20	$\frac{3}{4}$	13	$48\frac{15}{16}$	455	1813-02-D	4025-0-T
6514-9	$24\frac{1}{4}$	$\frac{13}{16}$	$14\frac{7}{8}$	$57\frac{11}{16}$	755	1813-01	4025-2-T
6514-10	$27\frac{1}{2}$	$\frac{11}{16}$	$16\frac{5}{16}$	64	1020	1813-01	4025-2-T

- ① Flanged connection--a standard North American square threaded flange is used for sizes -6, -7, -8 main air connections, but SW style inlet may be specified with no change in price. An SW inlet (suitable for slip-on or welded connection) is standard for -9 and -10 burners.
- ② Opening in furnace shell or outer wall must be $\frac{1}{2}$ " larger than dimension "AA" to allow for mounting plate fillet and draft.
- ③ Blank boss--as a no cost special may be specified with a 2" pipe tap for photocell, or a $1\frac{1}{2}$ " tap suitable for 5025-3-1T Oil Pilot, in which case North American will drill out $\frac{1}{2}$ " web of refractory left in tile before shipment, and the burner nose will be positioned so none of its holes are in front of that opening. Available upon request. For -10 size, which has no boss, one half of an appropriately sized coupling is added when specified.
- ④ 1" fpt for electrode or UV flame detector.
- ⑤ Pipe nipple and optional (recommended) Sensitrol Oil Valve are not included as part of the burner assembly, and must be ordered separately. Dimensions Z and DD assume a $\frac{3}{8}$ " close nipple between burner and Sensitrol Oil Valve (6514-6 through -8-B) and a $\frac{1}{2}$ " close nipple between burner and Sensitrol Valve (6514-9 and -10).
- ⑥ Applies when optional SW inlet is specified.
- ⑦ Flanged connection--a standard North American square threaded flange is used.
- ⑧ Flanged connection--a standard ANSI 125 psi threaded flange is used.
- ⑨ If Optional tubing purchased from North American.

ANSI or SW flanges: Flat face companion flanges and full face gaskets are supplied with this equipment. Do not use raised face flanges that may damage mating flange.

Ordering Information

To order, specify: 6514-(code)-(A or B if applicable) Burner complete and list 1813 Sensitrol Oil Valve separately.

Example: 6514-8-B Burner complete
1813-02-D Sensitrol Oil Valve

Options:

Add modifier to third term: BO = Burner only (less mounting and tile)
LC = carbon steel tile jacket
L4 = 304 SST tile jacket
L9 = 309 SST tile jacket

6514-8-AL4 Burner complete (with 304 SST tile jacket)
1813-02-D Sensitrol Oil Valve

6514-8-BBO Burner only

Optional short tile for 6514-10


Example: 6514-10-S Burner complete with short tile

WARNING: Situations dangerous to personnel and property can develop from incorrect operation of combustion equipment. North American urges compliance with National Safety Standards and Insurance Underwriters recommendations, and care in operation.

North American Mfg. Co., 4455 East 71st Street, Cleveland, OH 44105-5600 USA, Phone 216-271-6000, Facsimile 216-641-7852
E-mail sales@namfg.com • www.namfg.com

DRAWING ASC303-03
CEMS FLOW DIAGRAM

Revision 0
February 2007



AMETEK O₂ ANALYZER SPECIFICATIONS

Revision 0
February 2007

Stack Gas User's Manual


Rev. B

August, 1993




Process and Analytical Instruments Division
150 Freeport Road
Pittsburgh, PA 15238
Phone (412) 828-9040
Fax (412) 826-0399

FLOW DIAGRAM

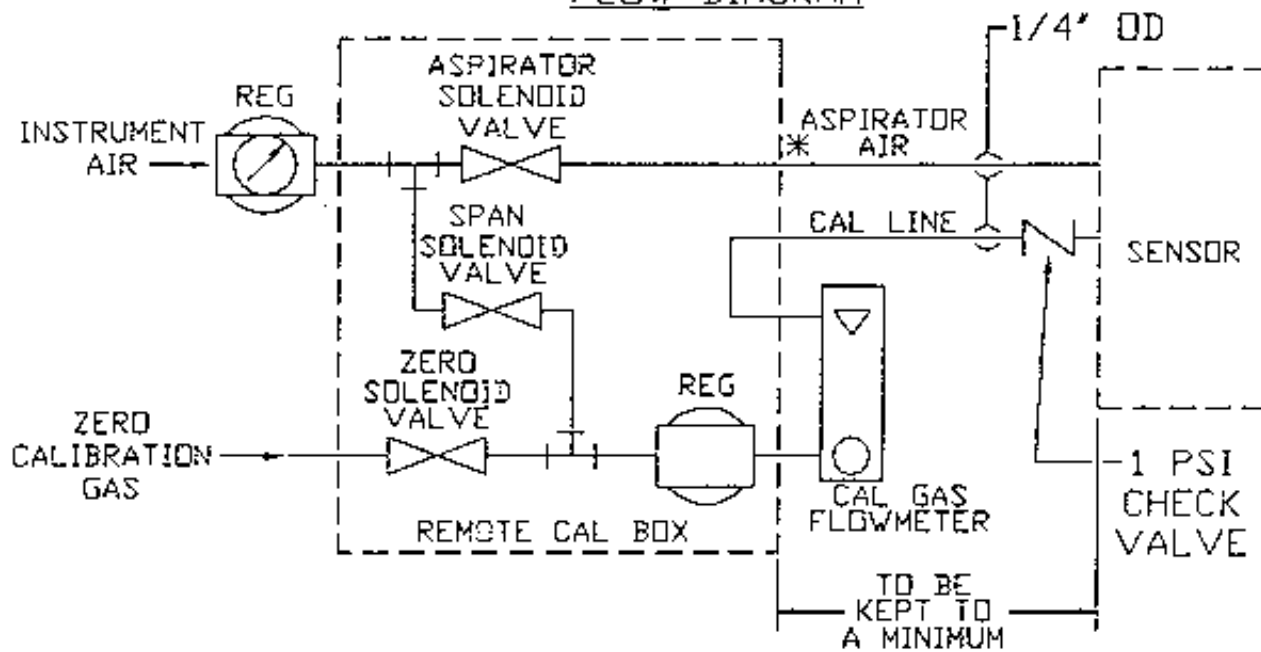

- * WDG IV - TO ASPIRATOR AIR REGULATOR ON SENSOR
- WDG HP - NOT NEEDED, THIS OUTLET IS PLUGGED
- STACK GAS - ASPIRATOR IS OPTIONAL

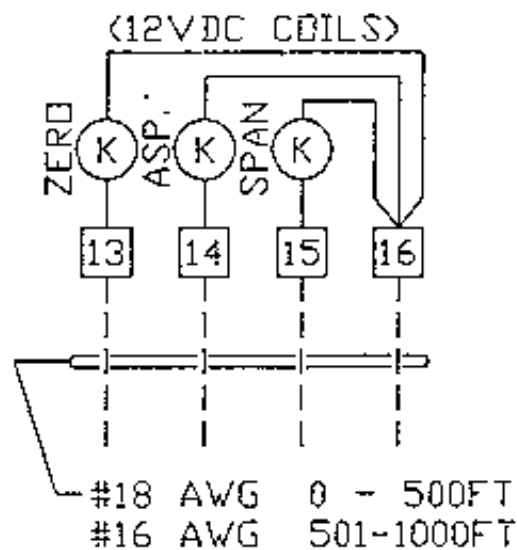

WIRING

FIGURE 2

VII. SPECIFICATIONS

OXYGEN ANALYZER

PRINCIPLE OF OPERATION	Zirconium oxide electrochemical cell.
ACCURACY	± 2 percent of measured value
REPEATABILITY	± 0.2 percent of measured value.
DRIFT	Less than 0.1% of cell output per month.
RESPONSE	90 percent of step change in less than five seconds.
ASPIRATOR AIR REQUIREMENTS (When supplied)	10 to 20 scfh (4.72 to 9.4 L/min.) to 100 PSI (.05 to 7.04 kg/cm ²) aspirator air regulator.
MAX. SAMPLE TEMPERATURE	400°F (200°C).
SAMPLE PRESSURE	2 to 20 inches WC.
AMBIENT TEMPERATURE	5 to 160°F (-20 To 71°C).
POWER REQUIREMENTS	115 VAC, 50/60 Hz (230 VAC optional) 450 VA max.

THERMOX O₂ ANALYZER SPECIFICATIONS

Revision 0
February 2007

Thermox® CEM/O2 Oxygen Analyzer

User Manual



P/N 90275VE REV. P



Thermox

150 Freeport Road
Pittsburgh, PA 15238

SPECIFICATIONS

Control Unit

Display:

4-line x 20-character vacuum fluorescent. Displays combinations of oxygen, time and date, cell temperature, user programmable text, thermocouple mV or cell mV. Password protection, programmable pressure compensation and context-sensitive help are also provided.

Analog Output:

Two isolated linear current outputs. Select O₂, cell temperature, thermocouple mV or cell mV. Each output can be 4-20 mA, 0-20 mA, 20-4 mA or 20-0 mA and is fully scalable. Hold or track during calibration and select degree of damping. Maximum load 1200 ohms.

Alarms:

Two independent oxygen alarms, each high or low selectable. One alarm can be assigned as oxygen, calibrate or verify. Set relays to energize or de-energize on alarm. Contact rating max 30VA, 30V max. non-inductive load.

Contact Rating:

1A, 30V max. noninductive load, AC or DC

Diagnostics:

Watchdog timer and service alarms. System test for A/D, RAM, EEPROM and keypad. Display line 4 reserved for full text error and diagnostic messages. Twenty entry event log for automatically detected system events.

Communications:

RS-485, 2-way addressable

Environment:

Ambient Temp: 14 – 122°F (-10 – 50°C)

Max. Altitude: 2000 meters

Relative Humidity: 0% to 80%, non-condensing

IEC Installation (Overvoltage) Category: II

IEC Pollution Degree 2

Enclosure:

Standard GP (General Purpose) 19" rack mount. Optional GP panel or wall mount, weatherproof NEMA 4 (IP56) and NEMA 4X (IP56) enclosures available. All are UL Listed for NEC Class I, Division 2 areas.

Calibration:

Store last calibration and verification data. Selectable calibration gas run time and process recovery time. Timed automatic calibration with optional remote calibration unit. Oxygen cell lifetime extender. Single gas verification that analyzer is within calibration limits.

Power Requirements:

Nominal 115-230 VAC, $\pm 10\%$, 47-63 Hz. max., 75 VA max.

Sensor

Operating Range:

0.1 to 100% O₂

Accuracy:

± 0.75% of reading or 0.05% O₂, whichever is greater.

Response Time:

Less than 4 seconds at 2 scfh from 2% O₂ to 20% O₂

Drift:

< 0.1% of cell output per month (< 0.005% O₂ per month with 2% O₂ applied)

Maximum Inlet Temperature:

400°F (204°C)

Sample Pressure:

± 2 psig max. (0.14 kg/cm²)

Sample Flow:

2 to 20 scfh (0.94 to 9.4 L/min.)

Environment:

Ambient Temp: -0 to 122°F (-18 to 50°C)

Relative Humidity: 10% to 90%, non-condensing

Max. Altitude: 2000 meters

IEC Installation (Overvoltage) Category: II

IEC Pollution Degree 2

Power Requirements:

115 VAC, ±10%, 47-63 Hz.; 230 VAC, ±10%, 47-63 Hz; 1670 VA max.

Calibration Gas Requirements:

Use calibration gases @ 2 to 20 scfh (0.94 to 9.4 L/min.)

Zero Gas: From 0.1 to 10% O₂, balance N₂

Span Gas: Minimum one decade above zero gas (10 times greater)

System Compliance:

EMC Directive 89/336/EEC

Low Voltage Directive 73-23/EEC

Notes: 1. All static performance characteristics are with operating variables constant. 2. System accuracy reference to 0.1 to 10% calibrated range.

Remote Calibration Unit (RCU) O₂ Only RCU

Enclosure:

UL Type 4X (NEMA 4X [IP56])

Environment:

Ambient Temp.: -18°C to 70°C (32°F to 150°F)

Humidity: 0 to 90%, non-condensing

Max Altitude: 2000 Meters

IEC Installation (Overvoltage) Category: II

IEC Pollution Degree 2

EMC Compliance: 89/336/EEC

Safety Compliance: 73/23/EEC

SIEMENS ULTRAMAT 23 CO ANALYZER SPECIFICATIONS

Revision 0
February 2007

ULTRAMAT 23

Gas Analyzers for IR-absorbing Gases and Oxygen

7MB2335, 7MB2337, 7MB2338

Operating Instructions

02/01



ULTRAMAT 23 gas analyzer, benchtop unit



ULTRAMAT 23 gas analyzer, 19" rack

3.5.2 Internal Gas Paths, Gas Flow Diagrams, Basic Layout

Basic design

- Gas inlets/outlets:
 - Pipe with 6 mm outside diameter or
 - Pipe with 1/4" outside diameter
- Internal gas paths:
 - Viton tube
- Flowmeter
- Pressure switch

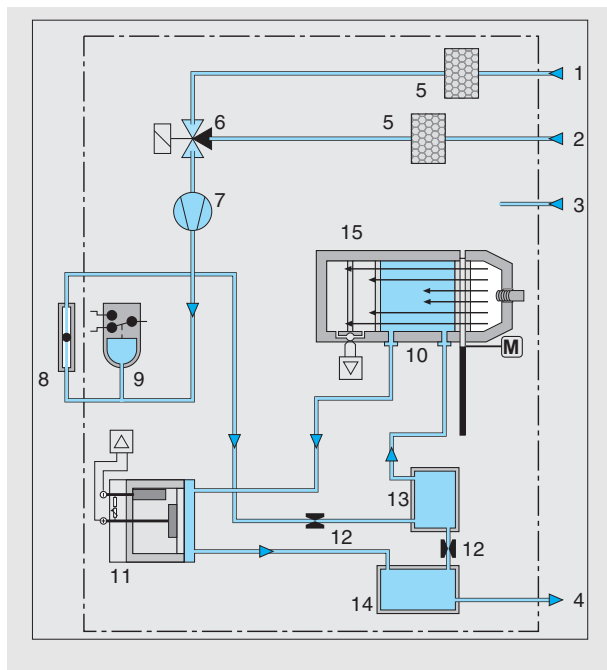


Fig. 3.7 ULTRAMAT 23, 19" unit, e.g. one IR component with oxygen measurement, with internal sample gas pump and safety filter

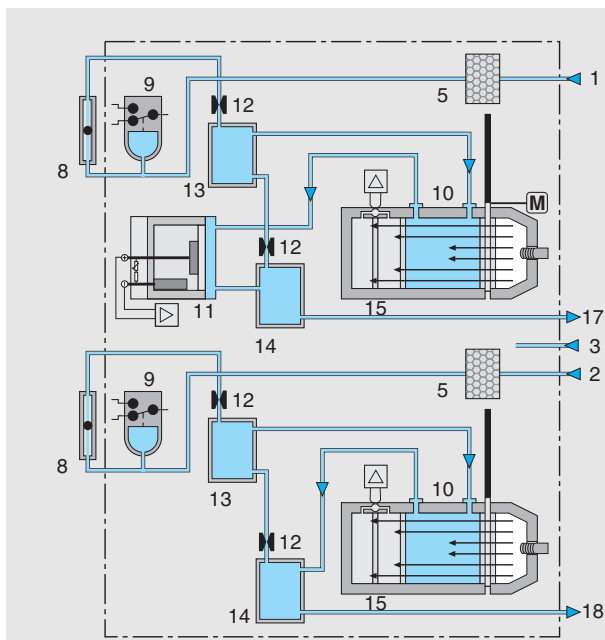


Fig. 3.8 ULTRAMAT 23, 19" unit, two channels with separate gas paths, e.g. two IR components with oxygen measurement, without sample gas pump, with internal safety filter

Key to Figures 7 to 11

- 1 Inlet for sample gas / calibration gas
- 2 Inlet for AUTOCAL / zero gas or inlet for sample gas / calibration gas (channel 2)
- 3 Enclosure purge inlet / chopper purge
- 4 Gas outlet
- 5 Membrane safety filter
- 6 Solenoid valve ¹⁾
- 7 Sample gas pump ¹⁾
- 8 Flowmeter

- 9 Pressure switch
- 10 Sample cell (see Fig. 3.3)
- 11 Oxygen measuring cell¹⁾ (see Fig. 3.4)
- 12 Restrictor
- 13 Condensation trap
- 14 Condensation trap
- 15 Infrared measuring cell
- 16 Condensation trap with filter
- 17 Gas outlet
- 18 Gas outlet (channel 2)

¹⁾ Depending on design, see Ordering data, pages 17 to 22

3.1 Application

The **ULTRAMAT 23** gas analyzer can measure up to 4 gas components at once: A maximum of three infrared sensitive gases such as CO, CO₂, NO, SO₂, CH₄, R22 (Freon CHClF₂) plus O₂ with an electrochemical oxygen measuring cell.

ULTRAMAT 23 basic versions for:

- 1 infrared gas component with/without oxygen measurement
- 2 infrared gas components with/without oxygen measurement
- 3 infrared gas components with/without oxygen measurement

Specific applications:

The **ULTRAMAT 23** with 2 IR components without pump and with or without oxygen measurement is also available with two separate gas paths. This allows the measurement of two measuring points as used e.g. for the NO_x measurement before and after the NO_x converter.

The **ULTRAMAT 23** gas analyzer can be used in emission measuring systems and for process and safety monitoring.

TÜV-approved versions of the **ULTRAMAT 23** are available for measurement of CO, NO, SO₂ and O₂ according to 13. BlmSchV and TA Luft.

Smallest TÜV-approved and permitted measuring ranges:

- 1- and 2-component analyzer
 - CO: 0 to 150 mg/m³
 - NO: 0 to 250 mg/m³
 - SO₂: 0 to 400 mg/m³
- 3-Komponenten-Analysator
 - CO: 0 to 250 mg/m³
 - NO: 0 to 400 mg/m³
 - SO₂: 0 to 400 mg/m³

All larger measuring ranges are also permitted.

For use in non-potentially explosive atmospheres.

Application examples

- Optimization of small firing systems
- Monitoring of exhaust gas concentration from firing systems with all types of fuel (oil, gas and coal) as well as operational measurements with thermal incineration plants
- Room air monitoring
- Monitoring of air in fruit stores, greenhouses, fermenting cellars and warehouses
- Monitoring of process control functions
- Atmosphere monitoring during heat treatment of steel.

Special characteristics

- Stable 19" sheet-steel enclosure for mounting in hinged bay or on slide rails.
Option: bench-top version with handles as well as condensation trap and coarse filter
- Operation based on NAMUR recommendation
- Simple, fast programming and commissioning of analyzer
- Practically maintenance-free as a result of AUTOCAL with ambient air (or with N₂ for analyzers without oxygen sensor); both the zero and the span are calibrated in the process
- Calibration with calibration gas is only necessary every six to 12 months, depending on application
- Large, backlit LCD for measured values; menu-based inputs for programming, test functions and calibration
- Two measuring ranges can be set per component within defined limits;
all measuring ranges linearized;
autoranging with range identification
- Automatic correction of variations in atmospheric pressure
- Gas flow monitoring;
Low-flow alarm at < 1 l/min
- Maintenance request alert
- Two limits can be freely configured for each component, for upward or downward violation
- Three binary inputs for sample gas pump on/off, triggering of AUTOCAL and synchronization of several devices
- Eight relay outputs can be freely configured for fault, maintenance request, maintenance switch, limits, range identification, external solenoid valves
- Four electrically isolated analog outputs;
RS 485 present in basic device;
option: converter to RS 232
- Incorporation in networks via PROFIBUS-DP/-PA interface
- SIPROM GA software as service and maintenance tool
- Eight additional relay outputs as an option
- Eight additional binary outputs as an option.

TECO MODEL 48C CO ANALYZER SPECIFICATIONS

Revision 0
February 2007

MODEL 48C

GAS FILTER CORRELATION CO ANALYZER

**INSTRUCTION MANUAL
P/N 42P255**



**THERMO ELECTRON CORPORATION
ENVIRONMENTAL INSTRUMENTS
27 FORGE PARKWAY FRANKLIN MASSACHUSETTS 02038**

**(866) 282-0430 Toll Free
(508) 520-0430 International
(508) 520-1460 Fax**

www.thermo.com/eid

3Mar2004

The 220V option complies with 89/336/EEC directive for electromagnetic compatibility.

The CO gas filter acts to produce a reference beam which cannot be further attenuated by CO in the sample cell. The N₂ side of the filter wheel is transparent to the infrared radiation and therefore produces a measure beam which can be absorbed by CO in the cell. The chopped detector signal is modulated by the alternation between the two gas filters with an amplitude related to the concentration of CO in the sample cell. Other gases do not cause modulation of the detector signal since they absorb the reference and measure beams equally. Thus the GFC system responds specifically to CO.

The Model 48C outputs the CO concentration to the front panel display and the analog outputs.

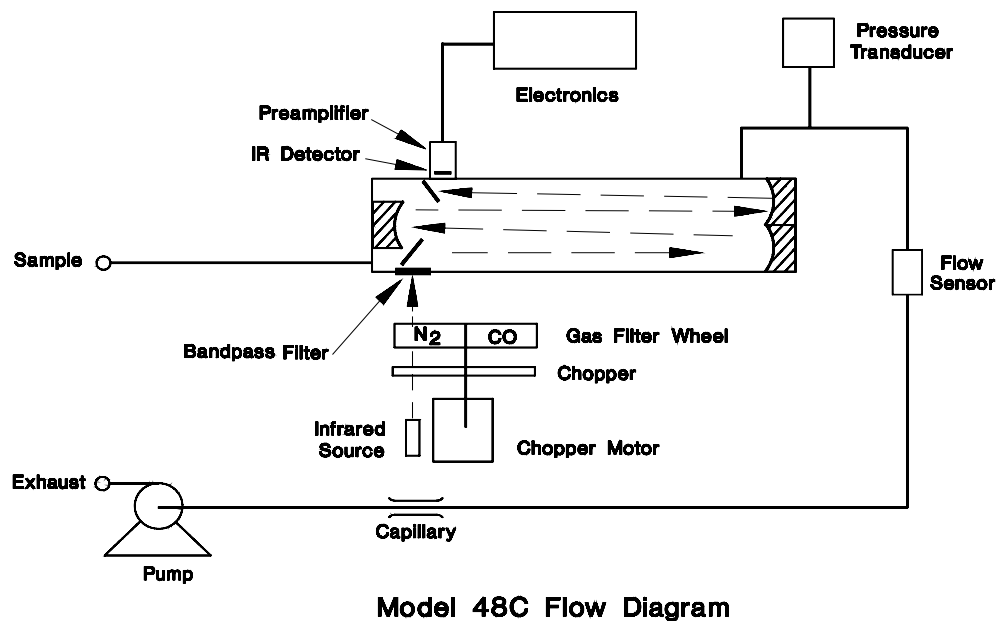


Figure 1-1. Model 48C Flow Schematic

B42P809

SPECIFICATIONS

Preset ranges	0-1, 2, 5, 10, 20, 50, 100, 200, 500, 1000, 2000, 5000, 10000 ppm 0-1, 2, 5, 10, 20, 50, 100, 200, 500, 1000, 2000, 5000, 10000 mg/m ³
Custom ranges	0-1 to 10000 ppm 0-1 to 10000 mg/m ³
Zero noise	0.02 ppm RMS (30 second time setting)
Lower detectable limit	0.04 ppm
Zero drift (24 hour)	< 0.1 ppm
Span drift (24 hour)	±1% fullscale
Response time	60 seconds (30 second time setting)
Precision	± 0.1 ppm
Linearity	± 1% fullscale ≤ 1000 ppm ± 2.5% fullscale > 1000 ppm
Sample flow rate	0.5-2 liters/min
Operating temperature	20 - 30°C (may be safely operated over the range of 0 - 45°C)*
Power requirements	105-125 VAC, 60 Hz 220-240 VAC, 50 Hz 100 Watts
Physical dimensions	16.75" (W) X 8.62" (H) X 23" (D)
Weight	45 lbs.
Outputs	CO selectable voltage 4-20 mA, RS-232, RS-485

* In non-condensing environments