

Navajo Abandoned Uranium Mine

Site Screen Report

This form is for use at the site of abandoned uranium mines (AUM) located on Navajo Nation lands. Applicable sites include all mine and mine features that have or have not undergone reclamation by the Navajo Abandoned Mine Lands Reclamation Program, including features, adits, pits and waste piles. Applicable sites also include all AUM sites listed in the USEPA CERCLIS database, all sites listed in the 2008 AUM GIS Report issued by USACOE and USEPA, all AUM sites on allotment lands associated with the Navajo Nation, and any and all AUM sites not listed in any database located on Navajo lands. Reconnaissance of any sites located on lands adjacent to Navajo lands that may be impacting Navajo lands will need to be coordinated with the authorities appropriate to those lands.

The purpose of the form is to ascertain the status and location of the identified AUM site, and record all immediate site information associated with the mine site. Decisions and recommendations on what additional steps are needed will be provided on a separate document.

Kings 6 AUM Site

Navajo AUM Northern Region

Prepared by:

Weston Solutions, Inc.

Contract: W91238-06-F-0083

12767.063.496.1111

March 2010

Part I Site Identification, Location and Status

Site Names and ID numbers as applicable

Mine ID: 46

Map ID: N70

CERCLIS: NNN000908843

Navajo Abandoned Mine Land Reclamation Program: NA-0403

Local name / Aliases: King No. 6; King 6; Jimmy King No. 6; King # 6; Jimmy King #6; Troy Rose; MP-292

Chapter and local area: Beclabito

County: Apache

State: Arizona

Lat/Long: 36.4105446786 N / -108.990331383 W

Nearby road and highway: Indian Route 63

Local Post Office: Beclabito, AZ

Surface Land Status: check one or more and provide ownership and contact information below

Tribal Trust Land	<input checked="" type="checkbox"/>	Public lands	<input type="checkbox"/>
Private	<input type="checkbox"/>	Tribal Fee Land	<input type="checkbox"/>
Bureau of Land Mgmt	<input type="checkbox"/>	Allotment	<input type="checkbox"/>
State	<input type="checkbox"/>	Fee land	<input type="checkbox"/>

Subsurface Mineral Rights:

The mineral rights ownership was identified as Indian.

Claim and operator information:

The mine site surface land status is classified as Tribal Trust Land. Historical documents showed the operator of the mine as Troy Rose Mining Co. from 1955 to 1957. No other historical ownership / lease information was identified in the EPA/AUM database.

Number of residential structures within 200 feet of mine: None

Estimated volume of mine waste onsite:

1,389 yd³

Part II Summary of radiological readings

Highest gamma radiation measurement:

163,249 counts per minute (cpm)

Describe any other radiological measurements:

A total of 1,410 gamma radiation measurements were collected from the mine site, ranging from 7,419 cpm to 163,249 cpm. Measurements in the vicinity of the waste debris were found at levels of approximately 80,000 cpm, and in the vicinity of the 2 adits at approximately 17,000 cpm, and 80,000 cpm. The measurements are represented in Figures 1 and 2.


Background Locations

#1 14,314 cpm

Average background = 14,314 cpm

Distribution Chart and Statistics:

The following chart and statistics were generated by ESRI ArcGIS 9.3.1, and show the general distribution of the site gamma radiation measurements. The horizontal X axis represents the gamma radiation reading levels in cpm (lowest levels to the left). The vertical Y axis represents the frequency of each gamma radiation level.

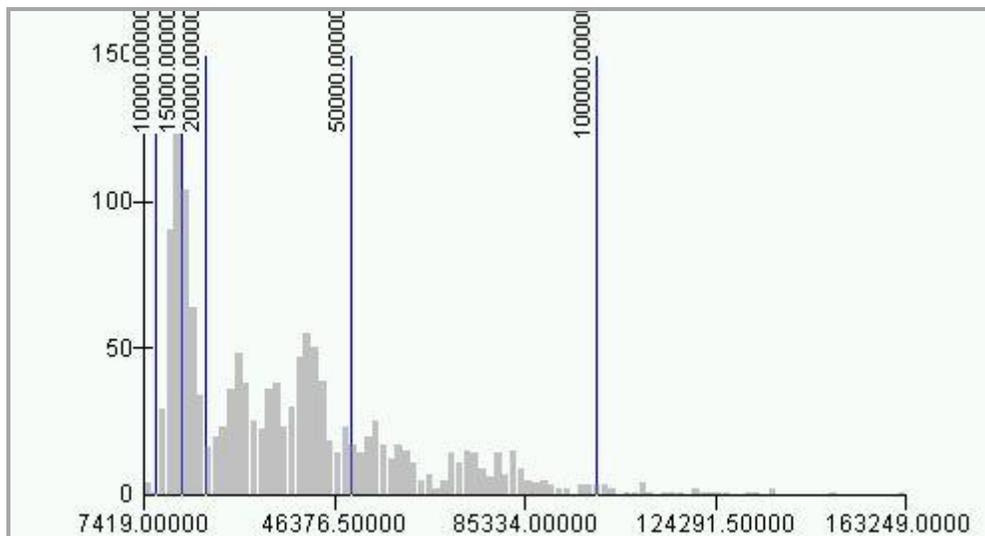

Count:	1410
Minimum:	7419.00000
Maximum:	163249.00000
Sum:	52506933.00000
Mean:	37238.95957
Median:	32765.00000
Standard Deviation:	23902.95480

Part III Status of Reclamation and Mine Waste

The following information was obtained from the Navajo Abandoned Mine Land Reclamation Program (NAMLRP) Point Features Database:

NAMLRP Status of the mine site: Reclaimed : Yes Waste Pile onsite : No

NAMLRP Project Number: NA-0403

NAMLRP Mine features: 2 Portals, 2 Prospects

The following information was obtained from field observations collected during the 2009 site screening:

Provide description and status of all mine sites and features at site. Include all waste piles, adits, pits and other features, and indicate whether they are open, closed, covered, capped, buried or unreclaimed. Indicate approximate size, shape and extent, including description of any reclamation caps. Note condition of all caps.

Observed reclamation work and status:

Adits

2 adits, approximately 6' x 8', reclaimed with stone and poly-foam

Waste Piles

Waste pile sloughing off down road beneath adit, 100'x75', with a total estimated volume of 1,389 yd³

Pits

None

Shafts

None

Other Debris and Mine Features

None

Part IV

Site observations and Environs

Observed Structures: list number of and describe human habitation status of structures at the following distances from mine:

0 to 200 feet: None

200 feet to 0.25 mile: None

Observed Public or commercial structure: list and describe all schools, clinics, Chapter Houses, places of business and any other structure used by members of the community at the following distances:

0 to 200 feet: None

200 feet to 0.25 mile: None

Levels measured around the perimeter(s) of the identified structure(s):

None

Observed water sources: list the number and type of wells and surface water sources that are potentially used for human consumption at the following distances from the mine:

0 to 0.25 miles: None

0.25 miles to 4 miles: None

Sensitive environments: note and describe all sensitive environments located within visible range of the mine site, including: wetlands, endangered species, habitats and approximate locations of sites that may be under protection of the government of the Navajo Nation.

None observed

Known Site History: include information from interviews with Chapter officials and residents. Note information on mine ownership, type of mining operation, period of operation, known amount of production, and any other information as provided.

Kings 6 consists of an area of 13,746.31m². The mine was identified as being operational from 1955 to 1957. Historical documents showed the operator of the mine as Troy Rose Mining Co. from 1955 to 1957. While operational, the mine had a total reported production volume of 54 tons. No other historical information or any additional ownership / lease information was identified in the EPA/AUM database.

Part V Response Action Summary

Site Name(s): Kings 6 **Chapter:** Beclabito

Decision Criteria

Is there an unreclaimed waste pile at the site? Yes

At what distance from the waste pile is the nearest residential structure located? None

At what distances from the waste pile are there potential drinking water sources? None

Is there a reclamation cap or sealed adit in place at the site? Yes

Is the cap/seal functionally intact? Yes

Is the cap/seal sufficiently degraded to create a concern about releases? No

At what distance from the cap/seal is the nearest domestic structure located? None

At what distance from the cap/seal is the nearest domestic drinking water source? None

Summary of emergency response factors

None

Summary hazard ranking system factors

None

Summary of reclamation factors

Unreclaimed waste pile; 2 sealed adits

Part VI Photos



Photo 1. Cliff side below adits, with waste rock



Photo 2. Sealed adit



Photo 3. Waste rock below adit



Photo 4. Cliff side below adits, with waste rock

Part VII Contacts Reports and Information

Name: Stanley Edison (928) 871-6861

Eugene Esplain (928) 871-7331

Title or official role (if any) Navajo EPA Superfund Program

Address PO Box 2946, Window Rock, AZ 86515

Information provided Lead Regulatory Agency

Name _____

Title or official role (if any) _____

Address _____

Telephone number _____

Information provided _____

Name _____

Title or official role (if any) _____

Telephone number _____

Information provided _____

Name _____

Title or official role (if any) _____

Telephone number _____

Information provided _____

**Figure 1 - Gamma Radiation Measurements, Above Two Times Background
Kings 6 (46)
Beclabito Chapter, Navajo Nation, Arizona**



Note: A portion of the path was estimated by the GPS unit, due to poor satellite coverage encountered during the site visit.

Legend


Gamma Radiation Measurements

- < 2X Background
- > 2X Background


Gamma survey conducted 10/2009
Measured as counts per minute (cpm)

Average background = 14,314cpm

-  Observed Waste Pile
-  Observed Adit
-  Inaccessible due to steep grades
-  General Direction Down-Slope
-  Mine Claim Boundaries



**Figure 2 - Gamma Radiation Measurements
Kings 6 (46)
Beclabito Chapter, Navajo Nation, Arizona**

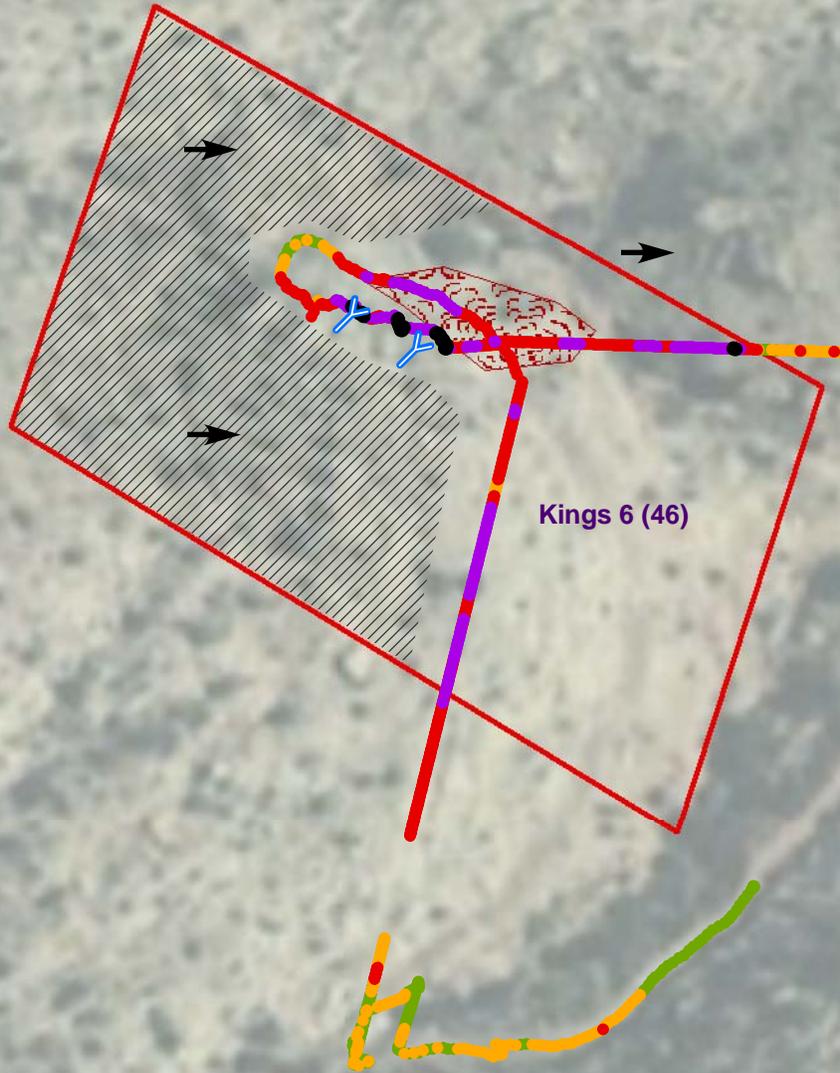

Note: A portion of the path was estimated by the GPS unit, due to poor satellite coverage encountered during the site visit.

Legend

Gamma Radiation Measurements

- 0 - 10,000
- 10,000 - 15,000
- 15,000 - 20,000
- 20,000 - 50,000
- 50,000 - 100,000
- > 100,000

- Observed Waste Pile
- Observed Adit
- Inaccessible due to steep grades
- General Direction Down-Slope
- Mine Claim Boundaries

Gamma survey conducted 10/2009
Measured as counts per minute (cpm)

Average background = 14,314 cpm